


**STRAIGHT PLUG CRIMP TYPE
CABLE 7/75 S**

R142.086.161
SERIES BNC 75-COM

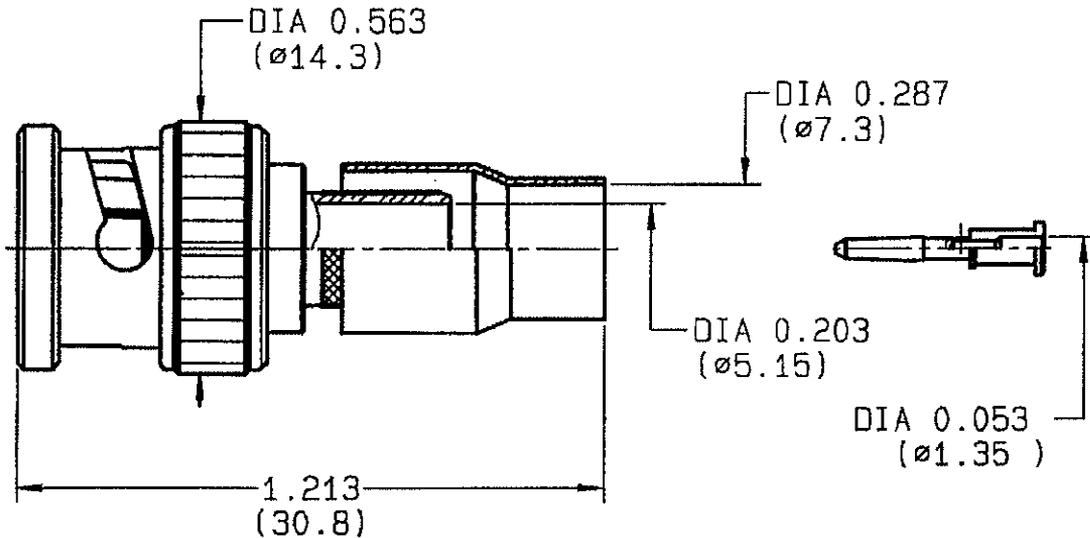

NOMINAL IMPEDANCE	75 Ω	CABLES : VCB 100
FREQUENCY RANGE	0-1.5 GHz	
TEMPERATURE RATING	-35/+70 °C	
V.S.W.R	1.15 + 0 x F(GHz)Maxi	
RF INSERTION LOSS	NA \sqrt{F} (GHz) dB Maxi	
VOLTAGE RATING	500 Veff Maxi	
DIELECTRIC WITHSTANDING VOLTAGE	1500 Veff Mini	
INSULATION RESISTANCE	5000 M Ω Mini	OTHERS CHARACTERISTICS
HERMETIC SEAL	NA Atm.cm ³ /s	CABLE RETENTION
LEAKAGE (pressurized only)	NA	CENTER CONTACT RETENTION
MECHANICAL DURABILITY	100 Cycles	Axial force - mating end
WEIGHT	12 gr	Axial force - opposite end
SPECIFICATION		Torque
		RECOMMENDED TORQUES
		Mating
		Panel nut
		Clamp nut

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	NICKEL	
OUTER CONTACT			
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2	
INSULATOR	POLYPROPYLENE		
GASKET	SILICONE RUBBER		
OTHERS PIECES	-		

ISSUE 0808C	CREATION DATE 17/09/1997	FILE PART-NUMBER 96-0011-005
-----------------------	------------------------------------	--



FANJAT


The information given here is subject to change without notice.
Design changes may be in order to improve the product.

Connect to the future




R142.086.161

ISSUE 0808 C SERIES BNC 75-COM

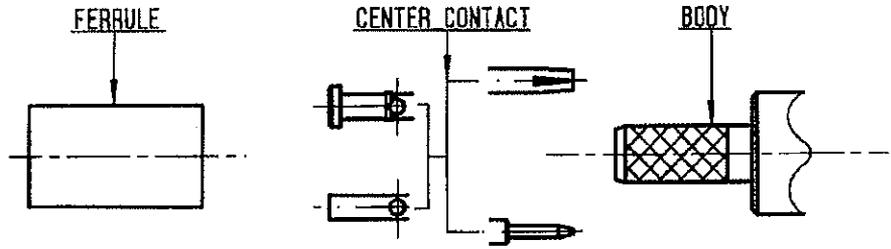

①

Slide ferrule onto cable
Strip the cable .

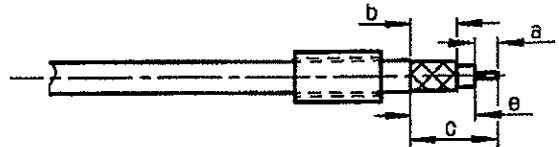


Stripping	a	b	c	d	e
inch	0.087	0.307	0.551	0	0.465
mm	2.2	7.8	14		11.8

②


Slide center contact on until it bottoms against cable dielectric .
Solder or crimp center contact .
Crimping tool : R282 227 000 (Hex. : .068)
or R282 293 000 (M22520/5-01)
+ dies R282 235 277

SOLDER / CRIMPING

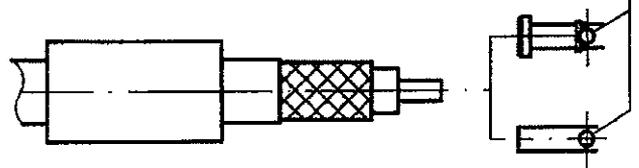


③

Fan the braid .
Slide cable into the body until bottoms against insulator .
Slide ferrule over the braid .
(In direction F)

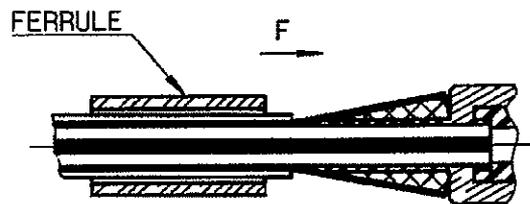

④

Crimp the ferrule with crimping tool R 282 227 000 (Hex. : 0.324) or crimping tool R282 293 000 (M22520/5-01)
+ dies R282 235 277
Cut excess of braid if necessary .

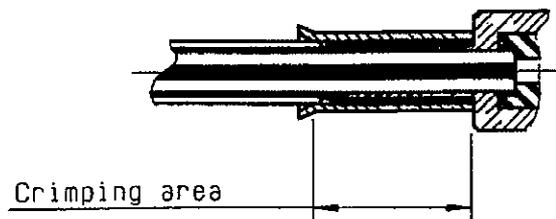

FANJAT

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9