

MOS FET Relays

G3VM-61AY/DY

Compact, General-purpose, Analog-switching MOS FET Relays, with Dielectric Strength of 5 kVAC between I/O Using Optical Isolation.

- Trigger LED forward current of 2 mA (maximum) facilities power saving designs.
- Switches minute analog signals.
- Continuous load current of 500 mA.

RoHS compliant

⚠ Refer to "Common Precautions".



NEW

Note: The actual product is marked differently from the image shown here.

■ Application Examples

- Power meter
- Measurement devices
- Security systems
- Industrial equipment

■ List of Models



Contact form	Terminals	Load voltage (peak value) (See the note.)	Model	Number per stick	Number per tape
SPST-NO	PCB terminals	60 V	G3VM-61AY	100	---
	Surface-mounting terminals		G3VM-61DY	---	---
			G3VM-61DY(TR)	---	1,500

Note: The AC peak and DC value are given for the load voltage.

■ Dimensions


Note: All units are in millimeters unless otherwise indicated.

G3VM-61AY

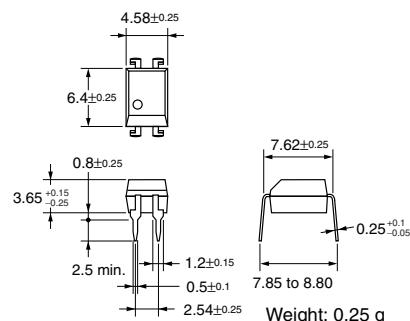

Note: The actual product is marked differently from the image shown here.


G3VM-61DY

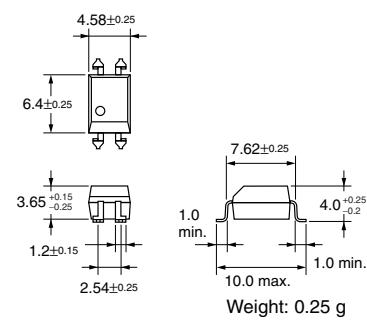



Note: The actual product is marked differently from the image shown here.

■ Terminal Arrangement/Internal Connections (Top View)

G3VM-61AY




G3VM-61DY



Note: The actual product is marked differently from the image shown here.


■ PCB Dimensions (Bottom View)

G3VM-61AY



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-61DY



■ Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I _F	30	mA
	Repetitive peak LED forward current	I _{FP}	1	A
	LED forward current reduction rate	Δ I _F /°C	-0.3	mA/°C
	LED reverse voltage	V _R	5	V
	Connection temperature	T _j	125	°C
Output	Load voltage (AC peak/DC)	V _{OFF}	60	V
	Continuous load current (AC peak/DC)	I _O	500	mA
	ON current reduction rate	Δ I _O /°C	-5.0	mA/°C
	Pulse ON current	I _{op}	1.5	A
	Connection temperature	T _j	125	°C
Dielectric strength between input and output (See note 1.)		V _{I-O}	5,000	Vrms
Operating temperature		T _a	-40 to +85	°C
Storage temperature		T _{stg}	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C
				10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.45	1.63	1.75	V
	Reverse current	I _R	---	---	10	μA
	Capacity between terminals	C _T	---	40	---	pF
	Trigger LED forward current	I _{FT}	---	0.3	2	mA
Output	Maximum resistance with output ON	R _{ON}	---	0.6	2	Ω
	Current leakage when the relay is open	I _{LEAK}	---	---	1.0	μA
	Capacity between terminals	C _{OFF}	---	130	---	pF
	Capacity between I/O terminals	C _{I-O}	---	0.8	---	pF
Insulation resistance		R _{I-O}	1,000	---	---	MΩ
Turn-ON time		t _{ON}	---	0.5	1	ms
Turn-OFF time		t _{OFF}	---	0.2	1	ms

Note: 2. Turn-ON and Turn-OFF Times



■ Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V _{DD}	---	---	48	V
Operating LED forward current	I _F	3	5	15	mA
Continuous load current (AC peak/DC)	I _O	---	---	500	mA
Operating temperature	T _a	-20	---	65	°C

■ Engineering Data

Load Current vs. Ambient Temperature

G3VM-61AY(DY)

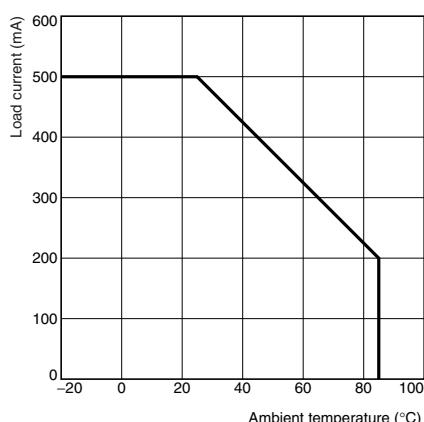

■ Safety Precautions

Refer to "Common Precautions" for all G3VM models.

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9