



Moisture Sensitivity Level (MSL) – 3

## FEATURES:

- Standard available frequencies: 10.00, 12.80, 19.20, 20.00, 25.00, 26.00, 30.72, 38.40 & 40.00MHz
- Standard LVC MOS Output
- Frequency stabilities to include  $\pm 100$ ppb over  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $\pm 280$ ppb over  $-50^{\circ}\text{C}$  to  $+90^{\circ}\text{C}$  and  $\pm 500$ ppb over  $-55^{\circ}\text{C}$  to  $+95^{\circ}\text{C}$  operating temperature range
- Excellent Phase Noise, Harmonics and Spurious content
- Typical rms jitter of 400fs @ 40MHz carrier & 1.0ps @ 10MHz carrier over 12kHz to 20MHz BW

## APPLICATIONS:

- COTS Military Radios & other Communication Hardware
- WiMax,
- LTE, BTS
- CATV, LAN, LMDS
- GPS Tracking with Hold-Over accuracy
- Test & Measurement Equipment
- Point-to-Point communication networks

## STANDARD SPECIFICATIONS:

## Maximum Rating

| Parameters                | Rating                              |
|---------------------------|-------------------------------------|
| Storage Temperature Range | $-55$ to $+125^{\circ}\text{C}$     |
| Supply Voltage            | $-0.5$ to $6\text{V}$               |
| ESD, HBM/CDM/MM           | $4\text{kV}/2\text{kV}/200\text{V}$ |

| Parameters                                              | Minimum                                                       | Typical | Maximum | Units  | Notes                                    |
|---------------------------------------------------------|---------------------------------------------------------------|---------|---------|--------|------------------------------------------|
| Frequency Range                                         | 10                                                            |         | 40      | MHz    |                                          |
| Standard Frequencies:                                   | 10.00, 12.80, 19.20, 20.00, 25.00, 26.00, 30.72, 38.40, 40.00 |         |         | MHz    |                                          |
| Initial Frequency Tolerance (@+25°C) at shipping        |                                                               |         | ±0.3    | ppm    | Relative to carrier                      |
| Frequency Stability Options                             |                                                               |         |         |        |                                          |
| -40°C to +85°C                                          |                                                               |         | ±100    | ppb    | Option “1”                               |
| -50°C to +90°C                                          |                                                               |         | ±280    | ppb    | Option “2”                               |
| -55°C to +95°C                                          |                                                               |         | ±500    | ppb    | Option “5”                               |
| Frequency Stability vs. Supply Voltage Change (Vdd±5%): |                                                               |         | ±100    | ppb    |                                          |
| Frequency Stability vs. Load Change (Load±5%):          |                                                               |         | ±200    | ppb    |                                          |
| Supply Voltage (Vdd):                                   | +3.135                                                        | +3.3    | +3.465  | V      |                                          |
| Aging (first year @+25°C):                              |                                                               |         | ±1.0    | ppm    |                                          |
| Aging (20 years @+25°C):                                |                                                               | ±3.0    | ±4.6    | ppm    |                                          |
| Supply Current (Icc) (into 15pF load):                  |                                                               | 3.0     | 4.0     | mA     | @10MHz carrier                           |
|                                                         |                                                               | 5.5     | 7.0     |        | @40MHz carrier                           |
| CMOS Output                                             |                                                               |         |         |        |                                          |
| V <sub>OH</sub> :                                       | 2.4                                                           |         |         | V      | Load=15pF                                |
| V <sub>OL</sub> :                                       |                                                               |         | 0.4     | V      | Load=15pF                                |
| Load:                                                   |                                                               |         | 15      | pF     |                                          |
| Duty Cycle:                                             | 45                                                            |         | 55      | %      | @( V <sub>OH</sub> - V <sub>OL</sub> )/2 |
| Rise/Fall Time:                                         |                                                               |         | 4       | ns     | Load=15pF                                |
| Waveform:                                               | Square Wave                                                   |         |         |        |                                          |
| RMS Jitter (12kHz to 20MHz BW)                          | 0.4                                                           |         | 1.3     | ps     | Carrier dependent                        |
| Phase Noise (10MHz carrier frequency @25°C):            |                                                               |         | -95     | dBc/Hz | Offset @10Hz                             |
|                                                         |                                                               |         | -120    |        | Offset @100Hz                            |
|                                                         |                                                               |         | -140    |        | Offset @1kHz                             |
|                                                         |                                                               |         | -145    |        | Offset @10kHz                            |
|                                                         |                                                               |         | -150    |        | Offset @100kHz                           |





### OPTIONS & PART IDENTIFICATION: (left blank if standard)

AST3TQ -  MHz -  -

#### Frequency in MHz

Please specify the frequency in MHz.  
e.g. 19.200MHz

#### Freq. Stability vs. Operating Temp.

- 1:  $\pm 100$ ppb over  $-40$  to  $+85^{\circ}\text{C}$
- 2:  $\pm 280$ ppb over  $-50$  to  $+90^{\circ}\text{C}$
- 5:  $\pm 500$ ppb over  $-55$  to  $+95^{\circ}\text{C}$







#### Packaging

Blank: Bulk

T: 500pcs/reel

T2: 2000pcs/reel


### FREQUENCY STABILITY VS. TEMPERATURE

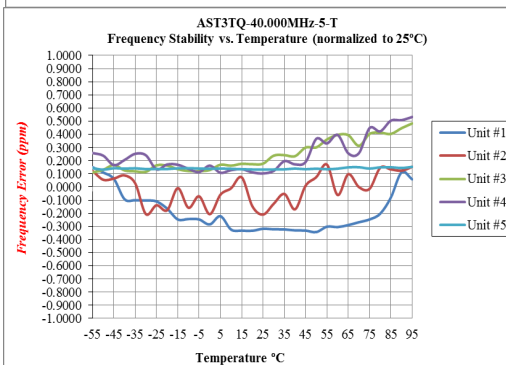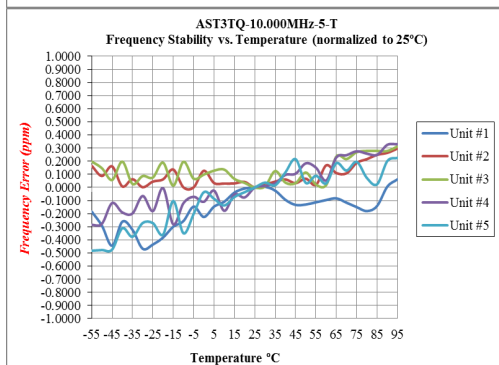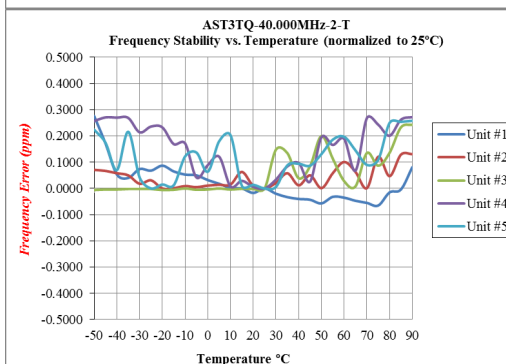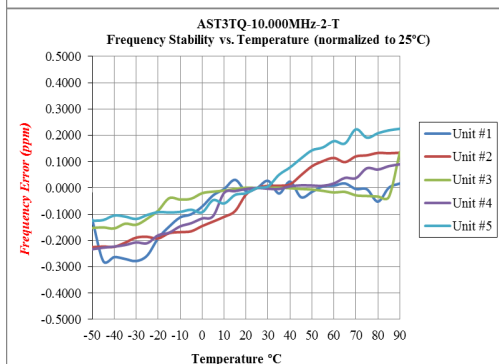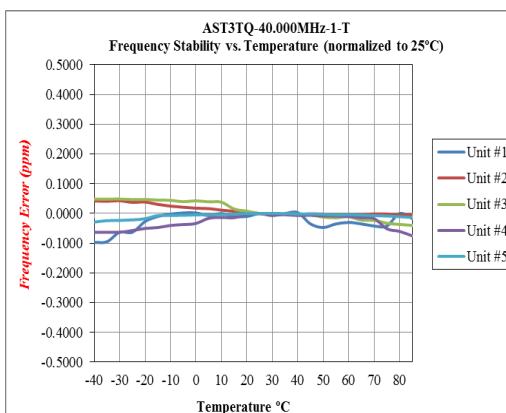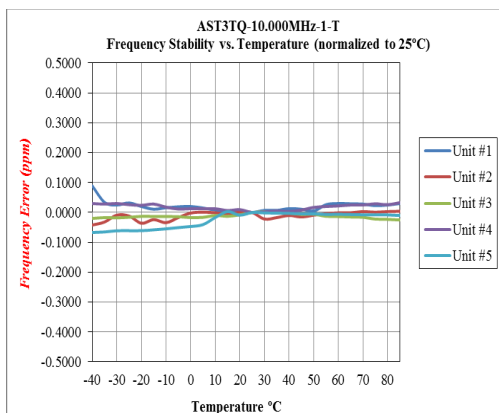




### TYPICAL PHASE NOISE


#### 10.00 MHz Carrier

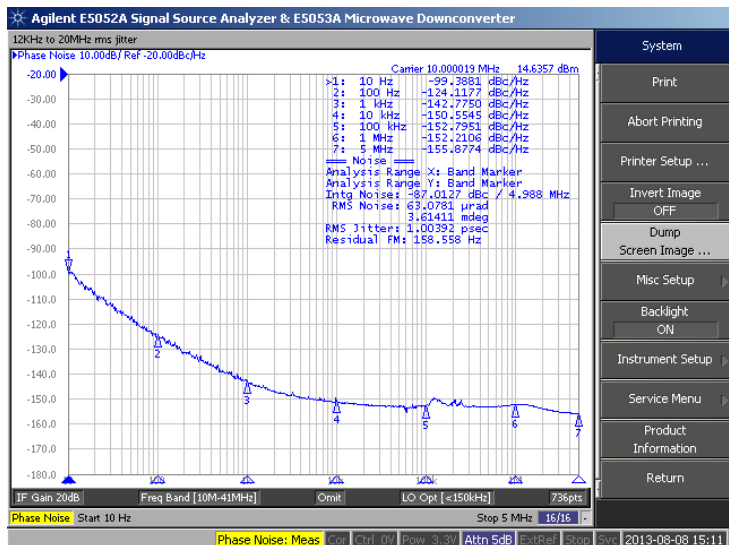

#### 20.00 MHz Carrier

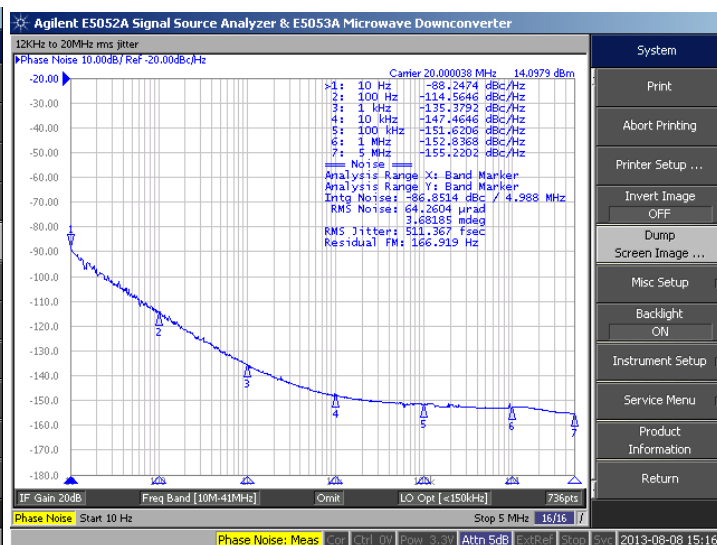


#### 40.00 MHz Carrier

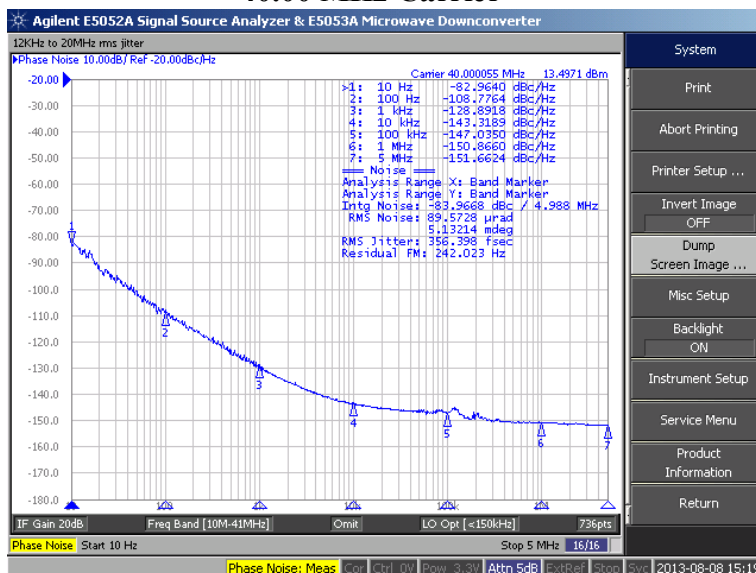




### OUTLINE DIMENSION:

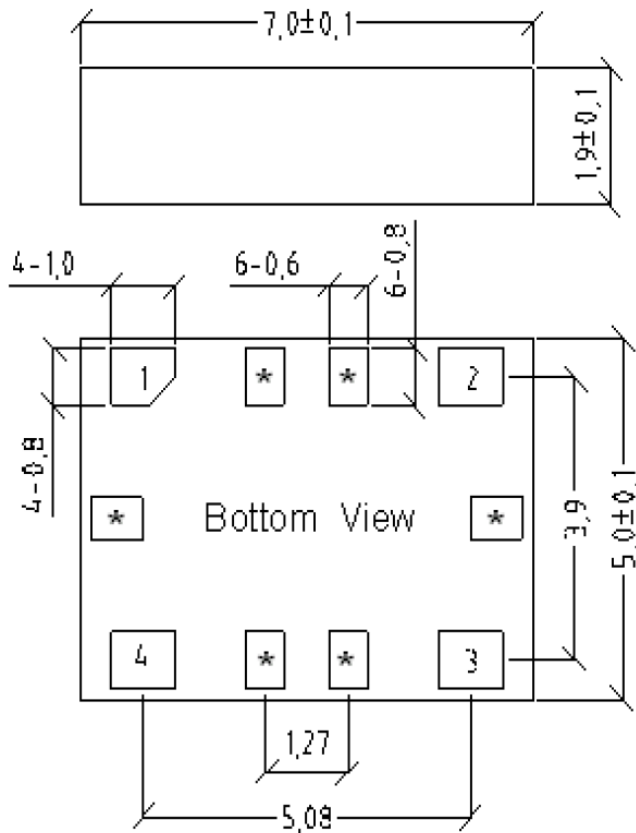


### Recommended Land Pattern

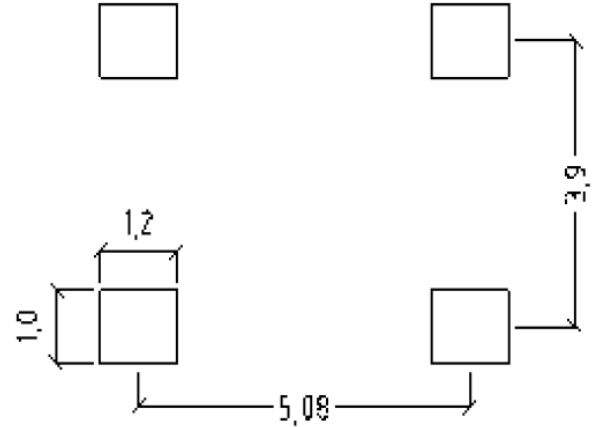

| Pin | Function              |
|-----|-----------------------|
| 1   | NC                    |
| 2   | GND                   |
| 3   | Output                |
| 4   | Vdd                   |
| *   | For factory test only |

Dimensions: mm

### REFLOW PROFILE:

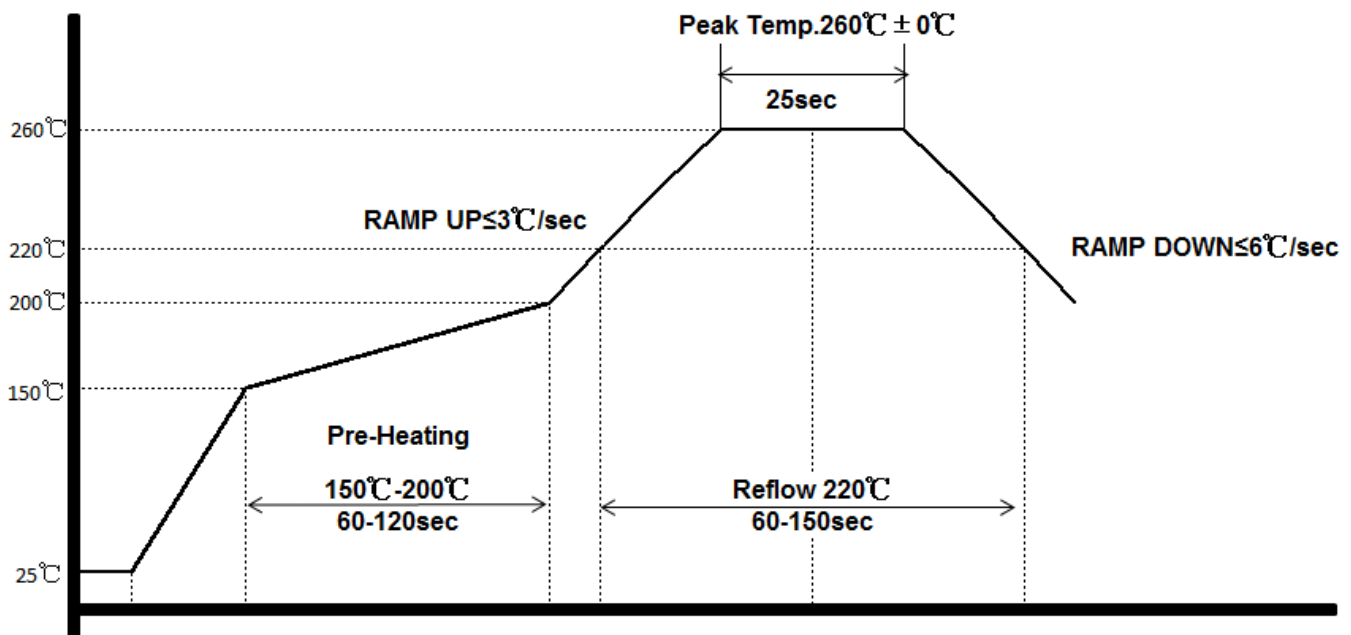




7.0 x 5.0 x 1.9mm

AST3TQ


 RoHS/RoHS II Compliant

TAPE & REEL:

**Packaging:**  
**T: 500pcs/reel**  
**T2: 2000pcs/reel**  
**MSL-3 packaging applies to MOQ=25 units (cut tape) & T and T2.**

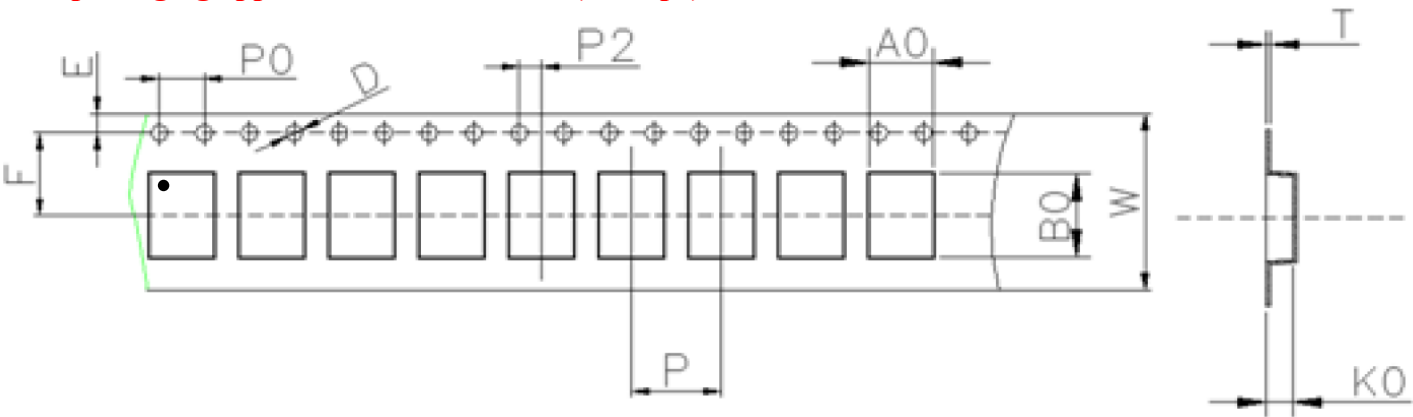


| W        | A0           | B0       | K0       | P        | F       |
|----------|--------------|----------|----------|----------|---------|
| 16.0±0.3 | 5.7±0.15     | 7.6±0.15 | 2.4±0.15 | 8.0±0.1  | 7.5±0.1 |
| E        | D            | P0       | P2       | T        |         |
| 1.75±0.1 | 1.5+0.1/-0.0 | 4.0±0.1  | 2.0±0.1  | 0.3±0.05 |         |

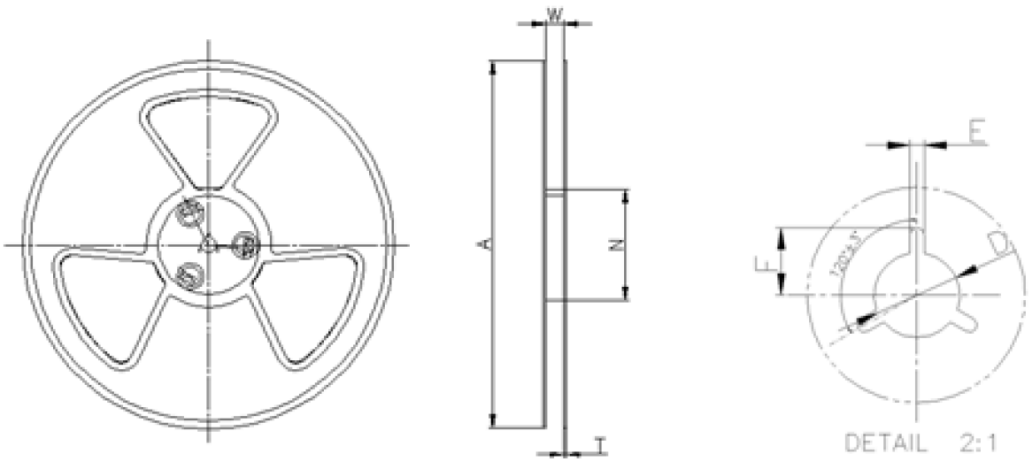

| W        | A       | N       | T       | E       | F         | D             |
|----------|---------|---------|---------|---------|-----------|---------------|
| 16.5±0.4 | 330±0.5 | 100±0.3 | 1.8±0.2 | 2.1±0.3 | 10.75±0.3 | 13.5+0.5/-0.2 |

Dimensions: mm

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9