



4

3

2

1




LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	C5	REVISED PER E-17-008108		6JUN17	A.X	H.W

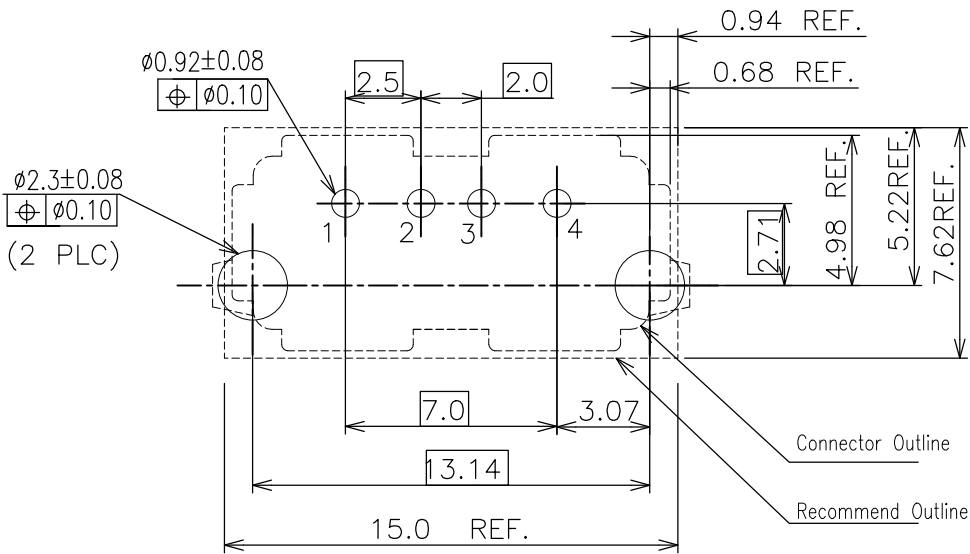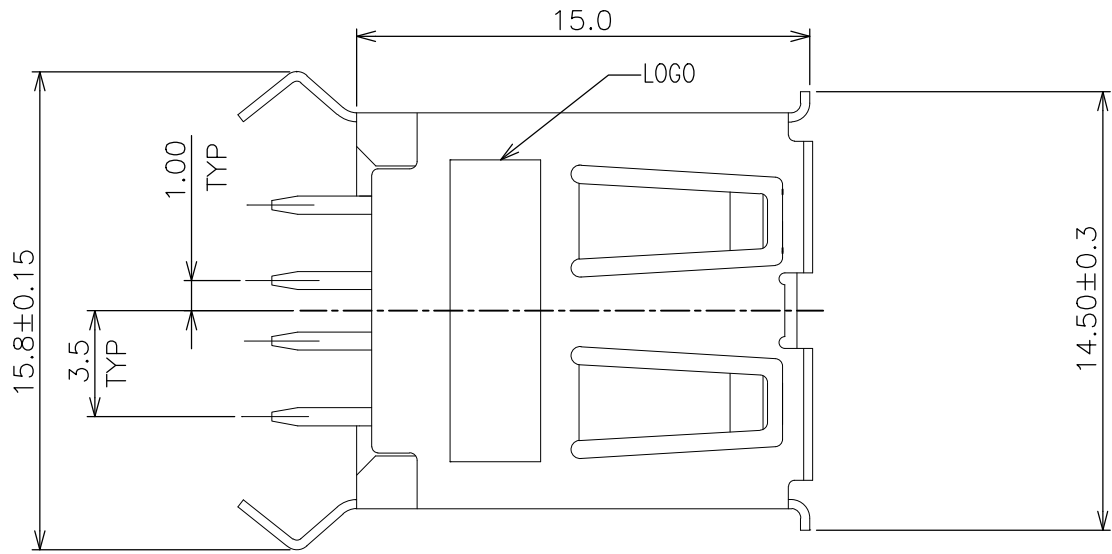

RECOMMENDED P.C.BOARD LAYOUT(T=1.6)

(TOP VIEW)(TOLERANCE:±0.05)

- NOTE:
1. MATERIAL:
- △HOUSING: PBT(SOLDER CAPABLE,UL 94-V0,COLOR:SEE TABLE.)
 - △HOUSING: PA9T(REFLOW CAPABLE,UL 94-V0,COLOR:SEE TABLE.)
 - CAP: LCP(REFLOW CAPABLE,UL 94-V0,COLOR:BLACK.)
 - BACK STOPPER: PBT(SOLDER CAPABLE,UL 94-V0,COLOR:BLACK.)
 - CONTACT: PHOSPHOR BRONZE, THICKNESS =0.25mm.
 - SHIELD: BRASS, THICKNESS=0.30mm.
2. FINISH:
- CONTACT:GOLD FLASH OVER
 - 0.762um[30u"]MIN. PALLADIUM-NICKEL PLATED ON CONTACT
 - 2.54um[100u"]MIN. MATTE-TIN ON SOLDER TAILS,
 - 1.27um[50u"]MIN. NICKEL UNDERPLATED ALL OVER.
 - △SHIELD: 2.54um [100u"] MIN. TIN PLATED OVER
 - 1.27um [50u"] MIN. NICKEL UNDERPLATED
 - △SHIELD: 0.762-2.03um [30-80u"] SOLDERABLE NICKEL OVER 0.762-2.03um [30-80u"] COPPER

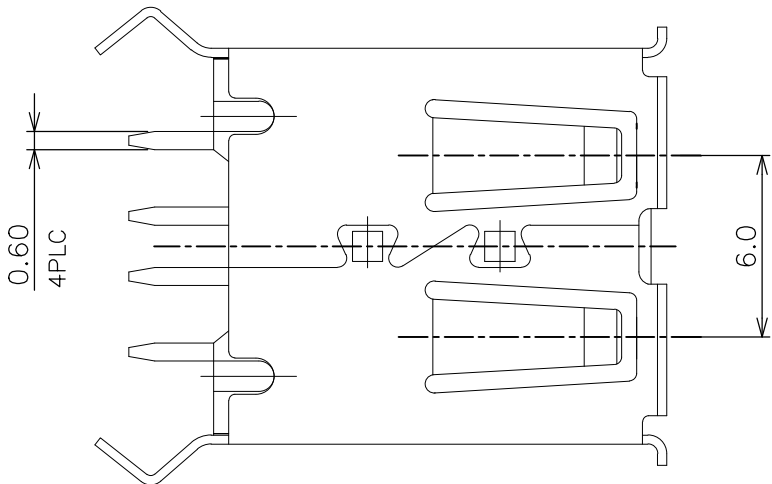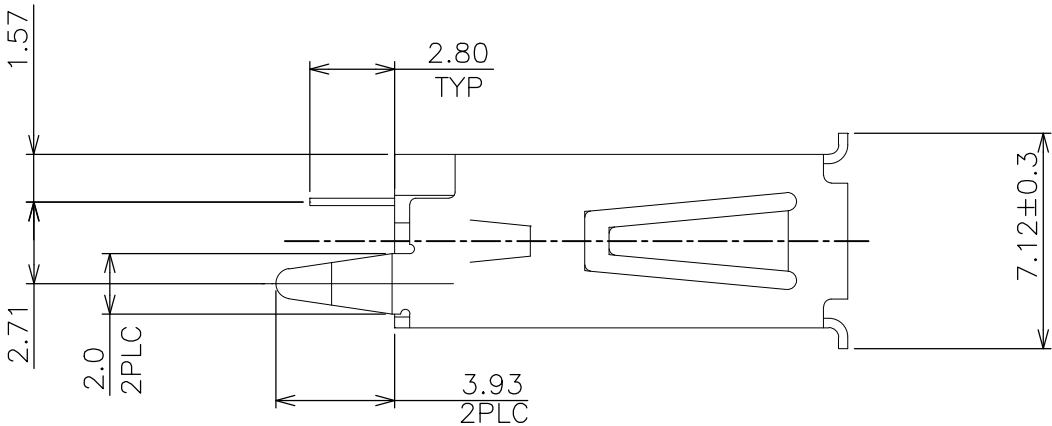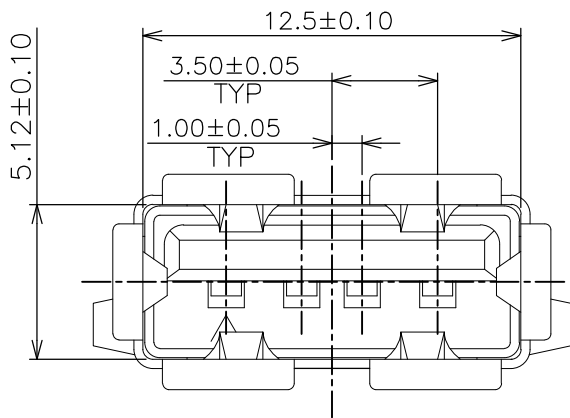

SEE SHEET 4	BLACK	1734366-5	△	△
SEE SHEET 5	BLACK	1734366-4	△	△
	BLUE	1734366-3		
SEE SHEET 4	WHITE	1734366-2		
	BLACK	1734366-1		
PACKING	HSG'S COLOR	PART NUMBER	HOUSING MATERIAL	SHIELD FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CHIEN 19SEP2008	TE Connectivity		
		CHK S. CHIEN 19SEP2008			
		APVD W.KODAMA 19SEP2008	NAME		
DIMENSIONS: mm		PRODUCT SPEC 108-57547	RECEPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB		
		APPLICATION SPEC 501-57635			
MATERIAL SEE NOTE		WEIGHT 1.82 GRAMS	SIZE A3	CAGE CODE 00779	DRAWING NO C=1734366
		CUSTOMER DRAWING		SCALE —	SHEET 1 OF 6
				REV C5	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT



BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD

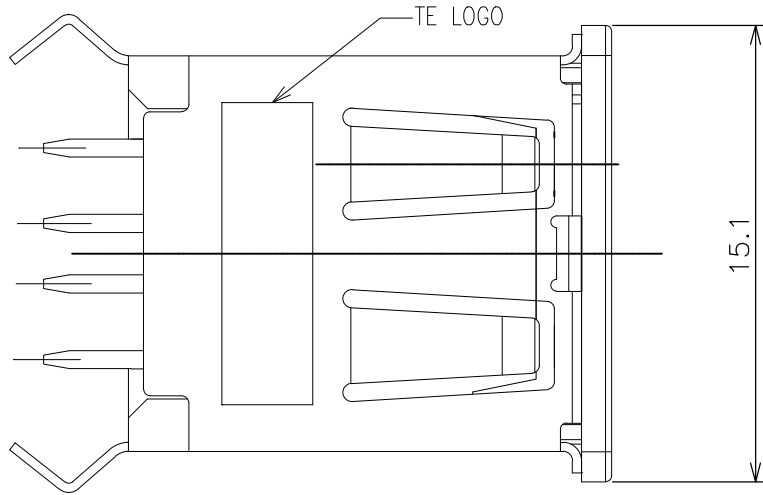

1734366-6 AS SHOW
OTHER DIMENSIONS ARE THE SAME AS SHEET1

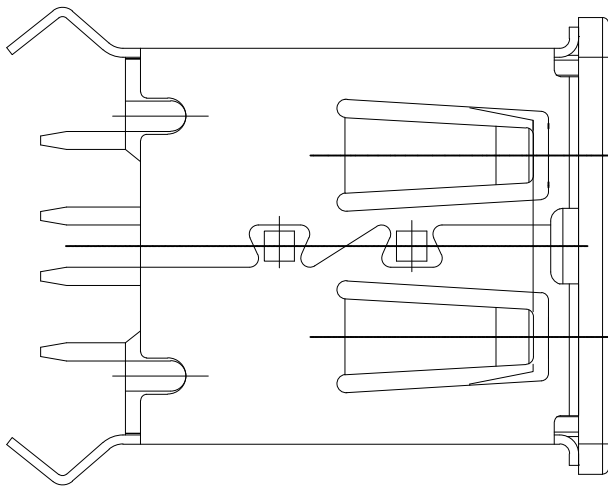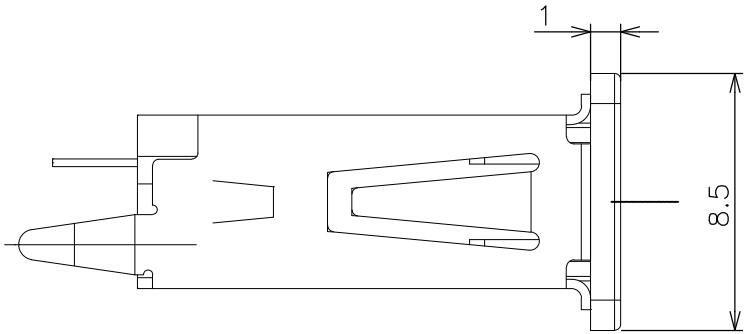

SEE SHEET 6	BLACK	1734366-6		
PACKING	HSG'S COLOR	PART NUMBER	HOUSING MATERIAL	SHIELD FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
		CHK			
		APVD	NAME		
		PRODUCT SPEC	RECEPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB		
		APPLICATION SPEC			
		WEIGHT	SIZE	CAGE CODE	DRAWING NO
		CUSTOMER DRAWING		SCALE	SHEET
				2 OF 6	REV C5



4

3



2

1

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
DW						

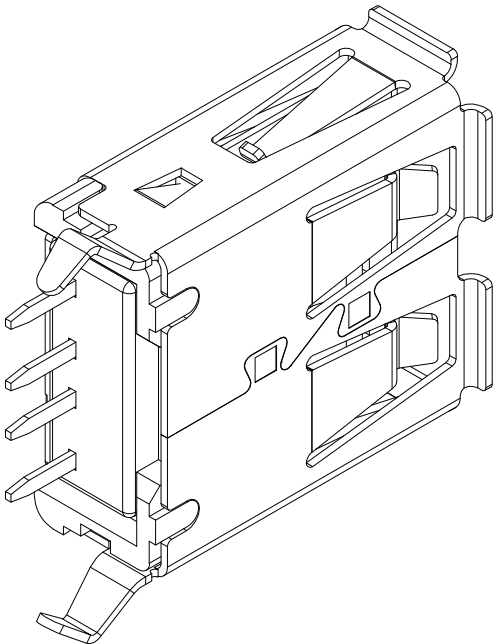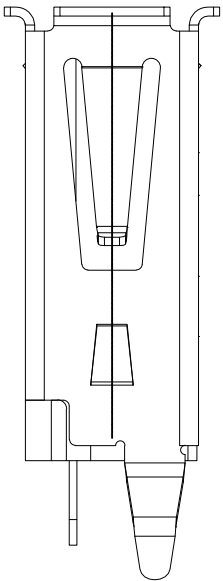


1734366-7 AS SHOW
OTHER DIMENSIONS ARE THE SAME AS SHEET1

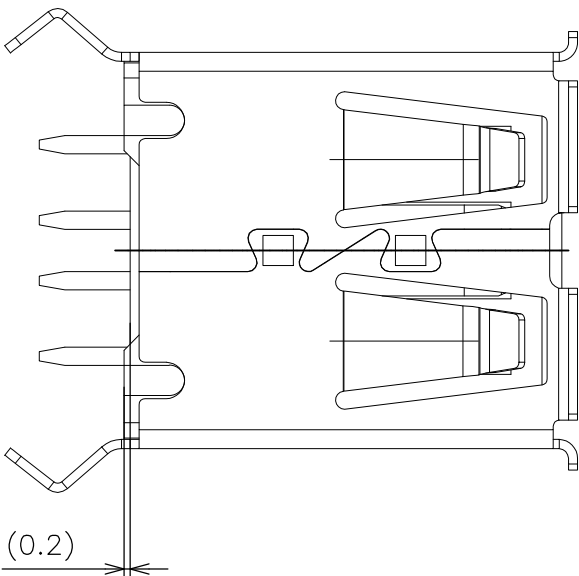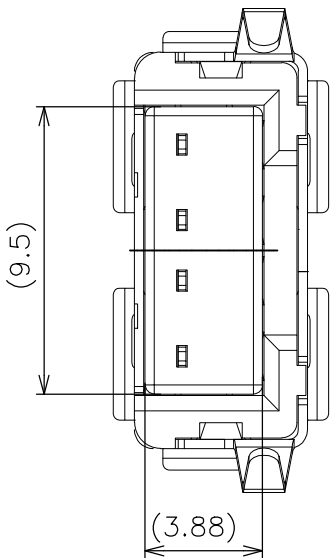


SEE SHEET 4	BLACK	1734366-7		
PACKING	HSG'S COLOR	PART NUMBER	HOUSING MATERIAL	SHIELD FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC	± 0.38	RECEPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB		
		1 PLC	± 0.25			
		2 PLC	± 0.13			
		3 PLC	± 0.05			
		ANGLES FINISH		SIZE		
MATERIAL				CAGE CODE		
				DRAWING NO		
				RESTRICTED TO		
				A300779		
				C=1734366		
				SCALE		
				SHEET		
				3 OF 6		
				REV		
				C5		

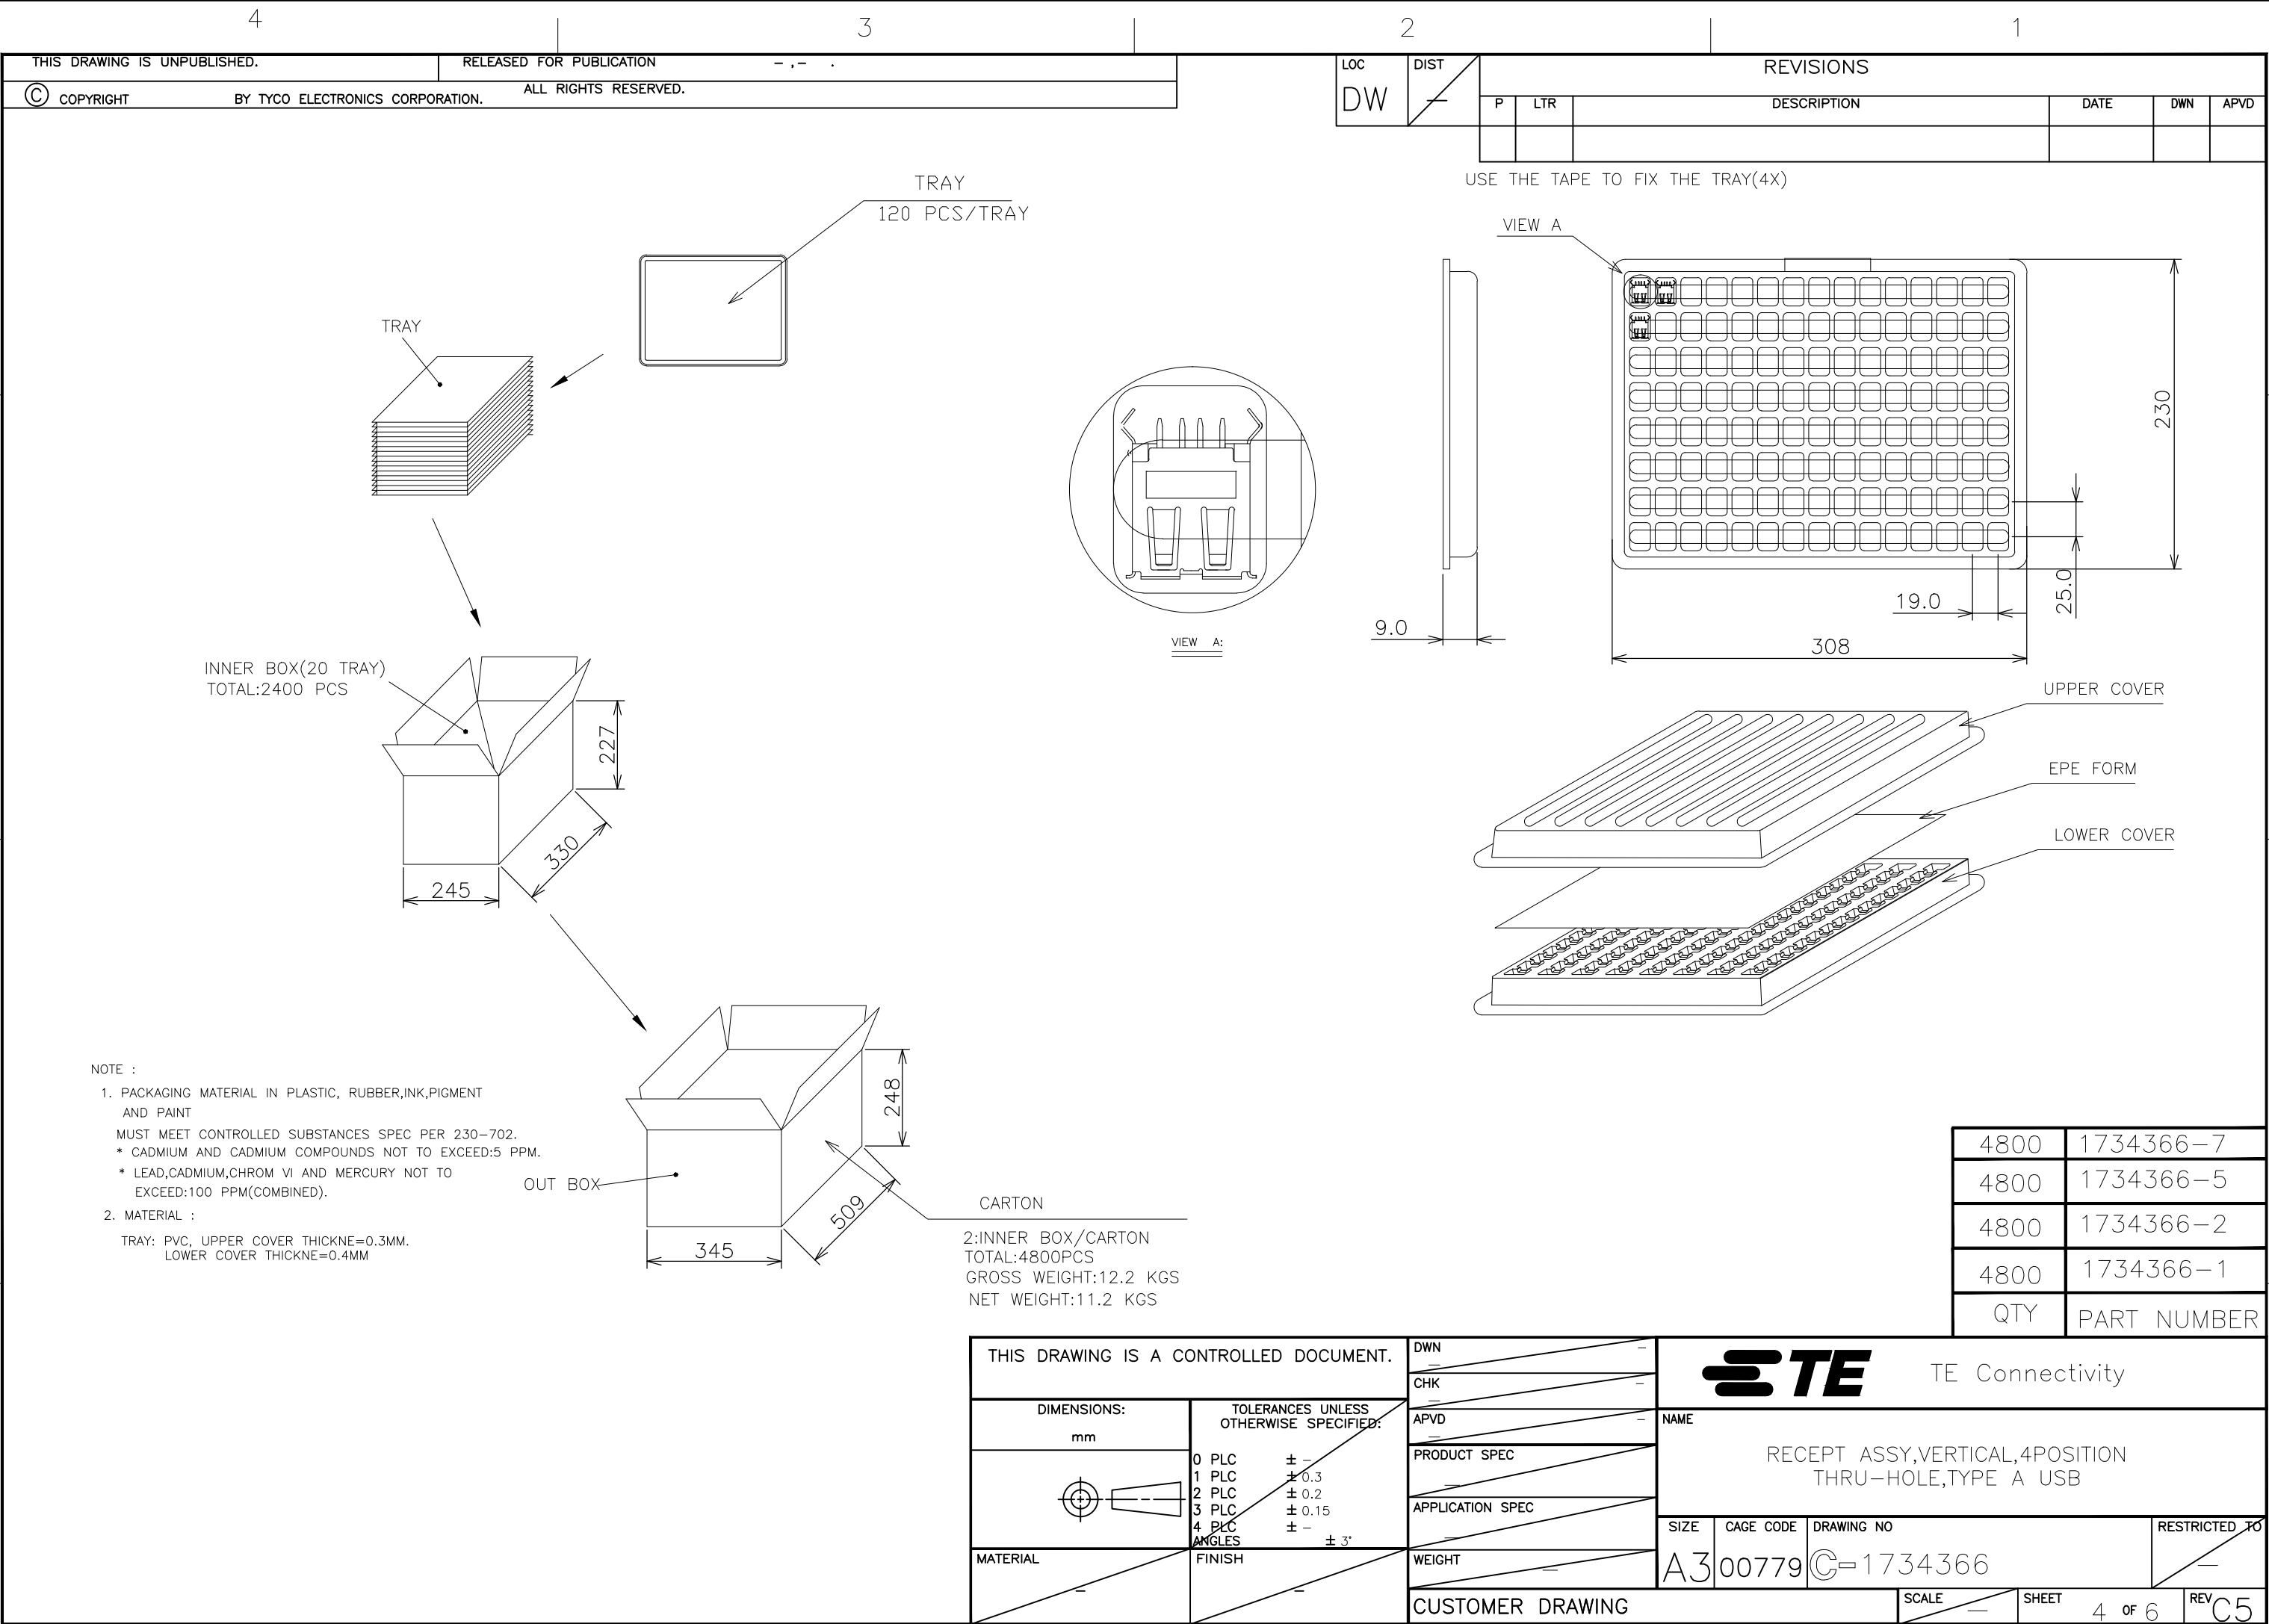

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD

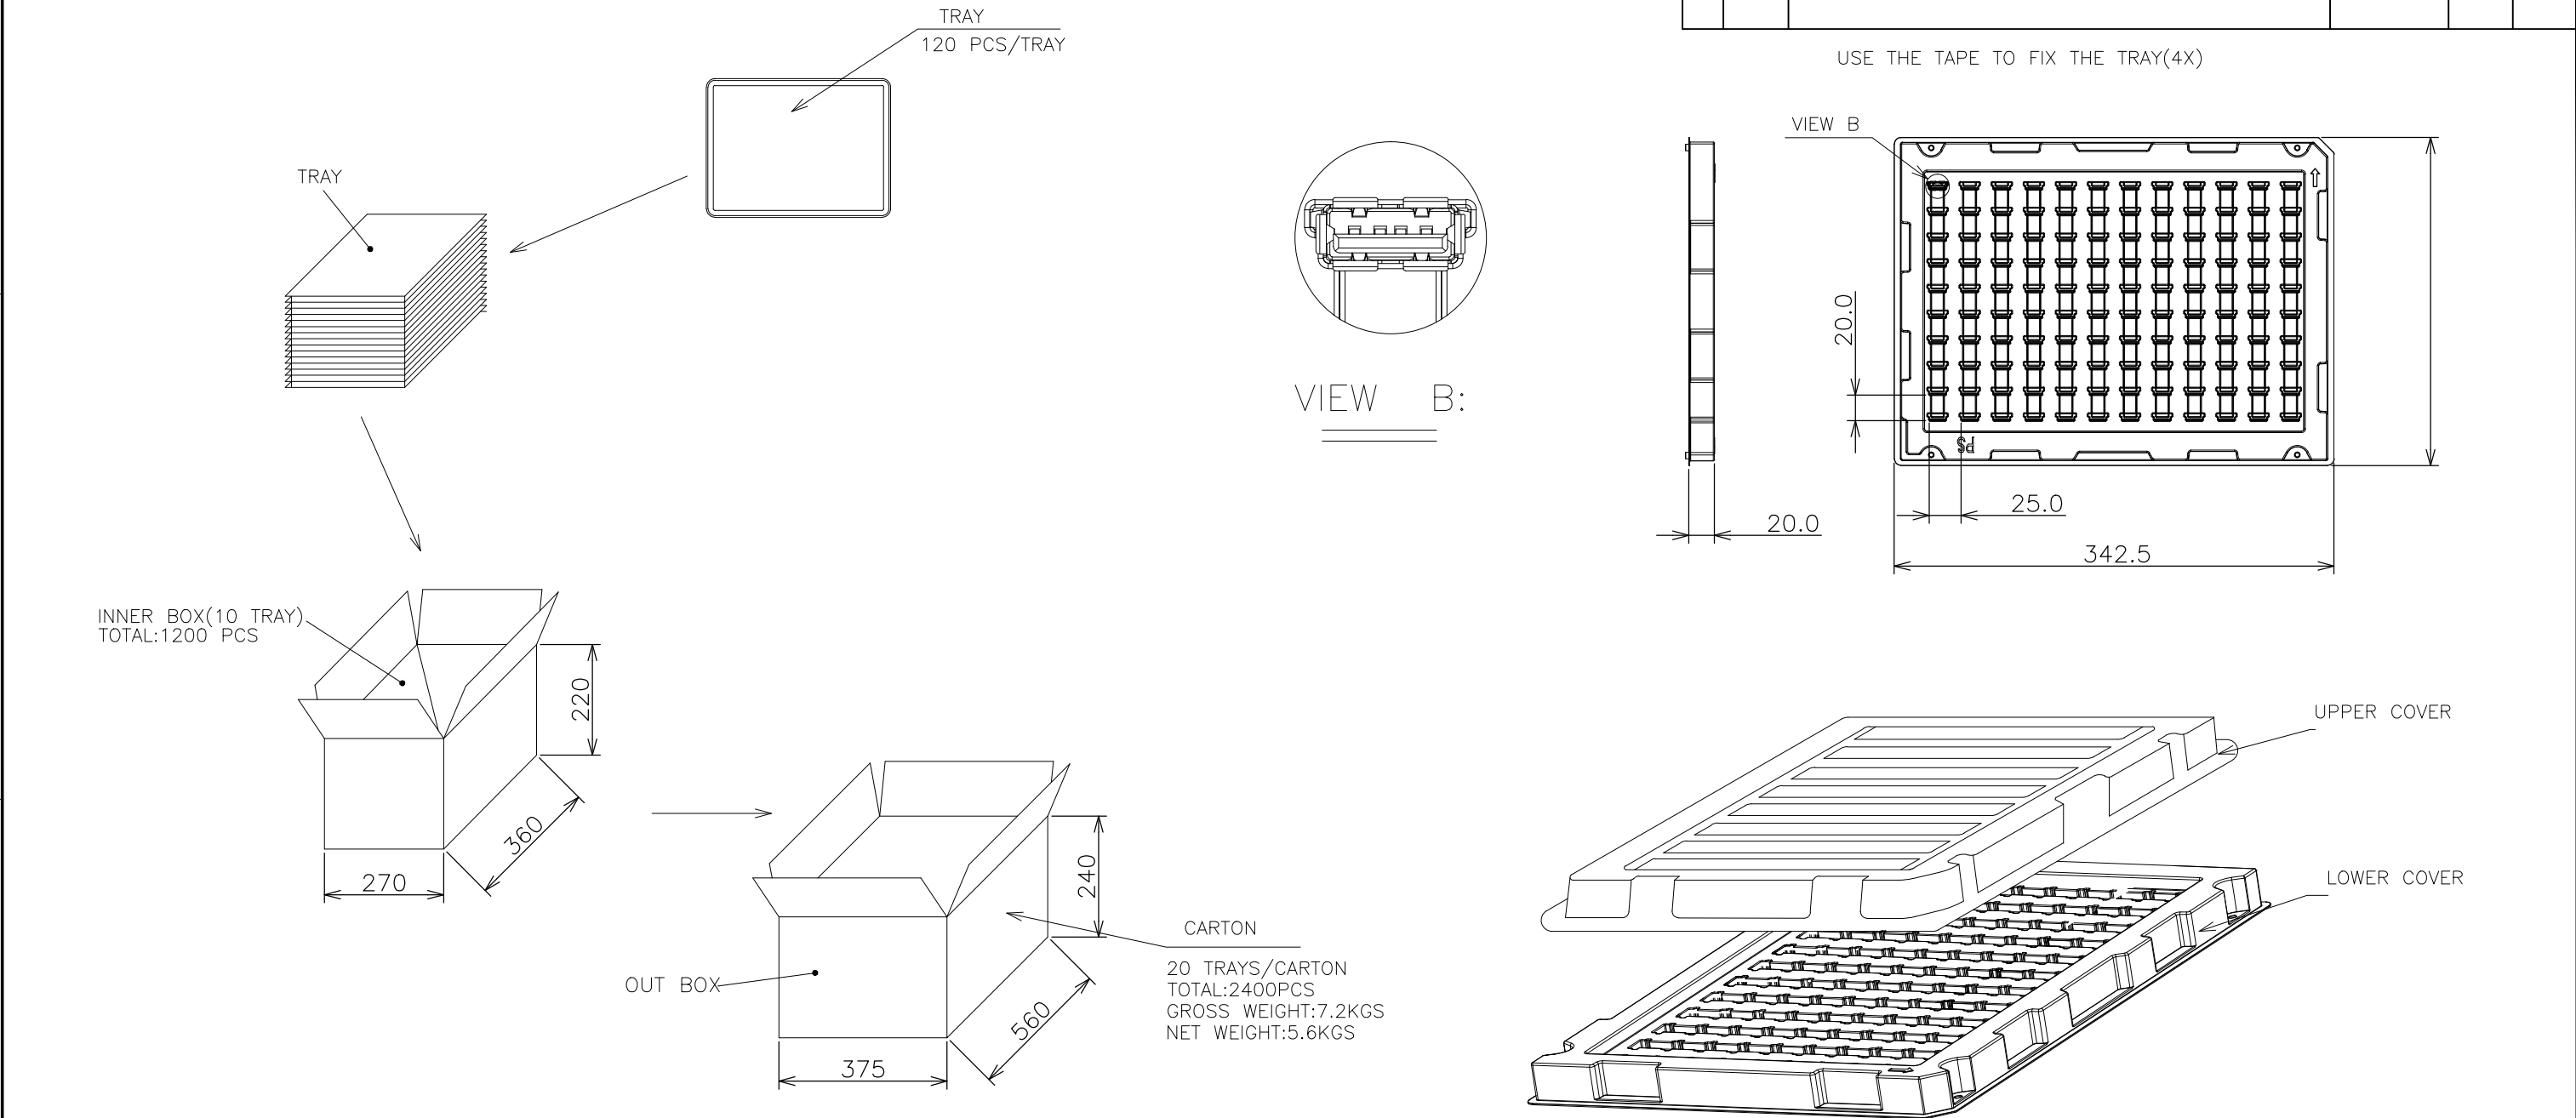

NOTE :

1. PACKAGING MATERIAL IN PLASTIC, RUBBER,INK,PIGMENT AND PAINT
MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED:5 PPM.
* LEAD,CADMIUM,CHROM VI AND MERCURY NOT TO EXCEED:100 PPM(COMBINED).

2. MATERIAL :

TRAY: PS, UPPER COVER THICKNE=0.5MM.
LOWER COVER THICKNE=0.7MM

2400	1734366-4
2400	1734366-3
QTY	PART NUMBER




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: mm		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± -		PRODUCT SPEC		RECEIPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB	
1 PLC ± 0.3		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± 0.2		WEIGHT		A300779C=1734366	
3 PLC ± 0.15		CUSTOMER DRAWING		SCALE SHEET 5 of 6 REV C5	
4 PLC ± -					
ANGLES ± 3°					
FINISH					
MATERIAL					

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DW	—						

NOTE :

1. PACKAGING MATERIAL IN PLASTIC, RUBBER,INK,PIGMENT AND PAINT
MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED:5 PPM.
* LEAD,CADMIUM,CHROM VI AND MERCURY NOT TO EXCEED:100 PPM(COMBINED).

2. MATERIAL :
REEL:BLACK CONDUCTIVE POLYSTYRENE ALLOY

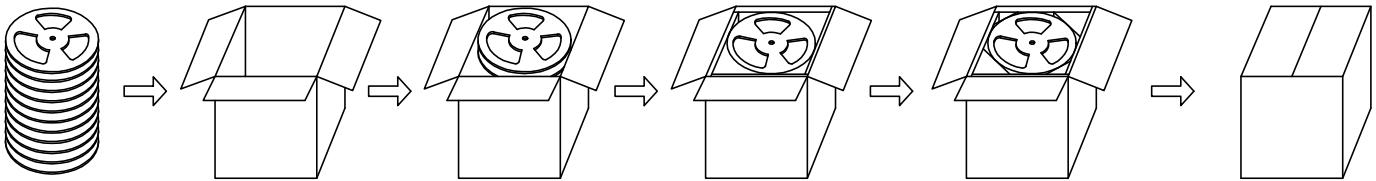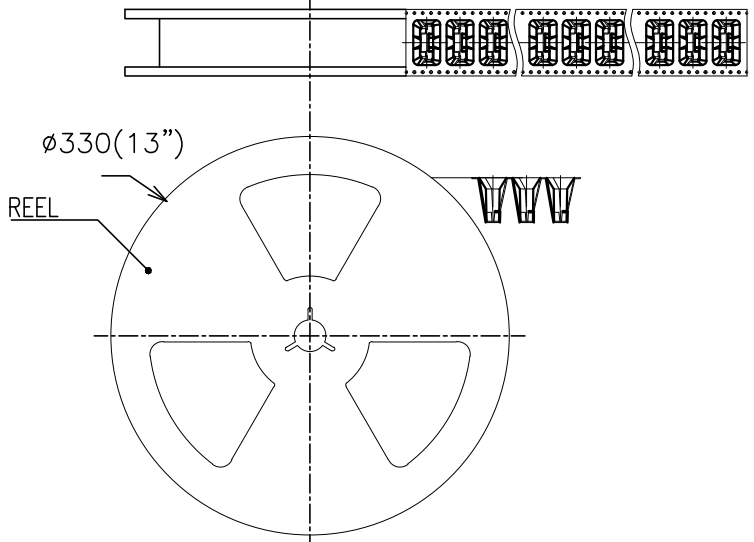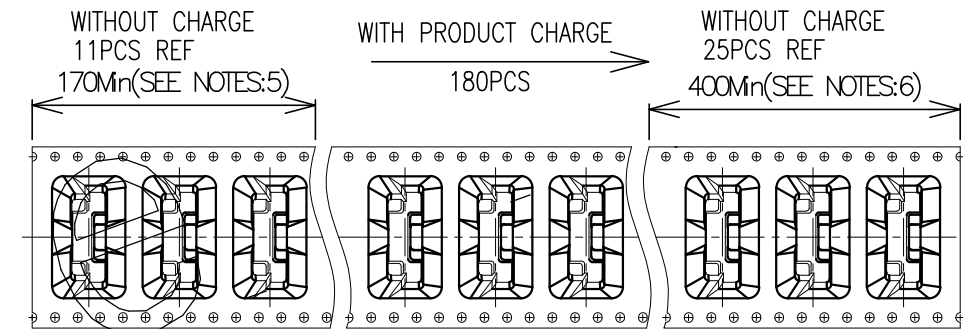

OUT BOX PACKAGE DIAGEAM DRAWING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN				
		CHK				
		APVD				
		PRODUCT SPEC				
		APPLICATION SPEC				
		WEIGHT				
		CUSTOMER DRAWING				
DIMENSIONS: mm		TE Connectivity				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
0 PLC ± -		RECEIPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB				
1 PLC ± 0.3		SIZE				
2 PLC ± 0.2		CAGE CODE				
3 PLC ± 0.15		DRAWING NO				
4 PLC ± -		RESTRICTED TO				
ANGLES ± 3°		A300779C=1734366				
MATERIAL		SCALE				
		SHEET 6 of 6				
		REV C5				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9