


SPECIFICATION CONTROL DRAWING

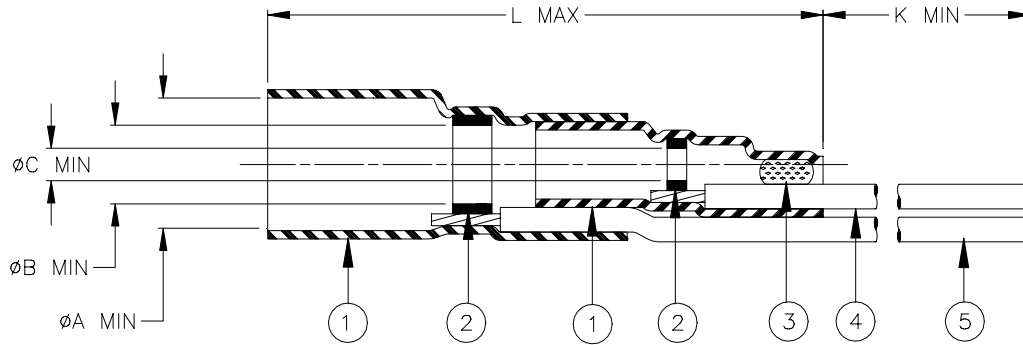

Product Revision		Product Dimensions					Cable Dimensions				
Product Name		ØA min	ØB min	ØC min	L max	K min	ØD	ØE	ØF min	G±0.5 (G±0.02)	M±0.5 (M±0.02)
B-040-25-01	G	4.4 (0.175)	2.8 (0.110)	1.6 (0.065)	28.0 (1.100)	150 (5.900)	1.9 (0.075) to 4.3 (0.165)	1.8 (0.075) to 2.7 (0.105)	0.3 (0.015)	19.0 (0.750)	6.0 (0.235)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.
3. MELTABLE RING: Thermally stabilized thermoplastic.
4. CONDUCTOR LEAD (Color: white): RAYCHEM 55A0112-24 in accordance with MIL-W-22759/44 AWG24, stranded, silver plated copper.
5. GROUND LEAD (Color: blue): RAYCHEM 55A0112-24 in accordance with MIL-W-22759/44 AWG24, stranded, silver plated copper.

APPLICATION

1. This part is designed to provide an environment protected shield and conductor termination of a coaxial cable, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated shields.
2. Temperature range: -55°C to +150°C.
3. Install using Raychem approved convection or infrared heating tools in accordance with Raychem Installation Procedure RPIP-500-03.

For best results, prepare the cable as shown:

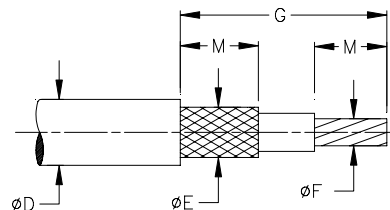

Raychem Interconnect <i>a division of tyco Electronics</i> 300 Constitution Drive Menlo Park, CA 94025, USA		THERMOFIT DEVICES		TITLE : COAXIAL SOLDERSLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: B-040-25-01			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D001324		REPLACES: N/A	
DRAWN BY: M. FORONDA		DATE: 18-Dec.-00	PROD. REV. G	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9