

## C-UFB- 5DC/E 75


Order No.: 2763604

The illustration shows version C-UFB- 5DC/E

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2763604>

Attachment plug with surge voltage coarse and fine protection, for coaxial signal interfaces with floating shield, signal voltage 5 V.  
Connection: BNC female/male connector

### Commercial data

GTIN (EAN)	 4 017918 347772
sales group	J401
Pack	10 pcs.
Customs tariff	85363010
Catalog page information	Page 175 (TT-2009)

### Product notes

WEEE/RoHS-compliant since:  
06/30/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

Housing material	Aluminum
Color	black

Standards for air and creepage distances	VDE 0110-1
	IEC 60664-1: 1992-10
Total surge current (8/20) $\mu$ s	20 kA
Ambient temperature (operation)	-40 °C ... 80 °C
Mounting type	Connection-specific intermediate plugging
Design	Attachment plug
Degree of protection	IP20
Direction of action	Line-Shield/Earth Ground
Width	25.40 mm
Height	93.00 mm
Length	25.40 mm

**Protective circuit**

IEC category	C2
	C3
	D1
Maximum continuous operating voltage $U_c$	5 V DC
Maximum continuous voltage $U_c$ (wire-shield)	5 V DC
Nominal current $I_N$	185 mA (25°C)
Operating effective current $I_c$ at $U_c$	$\leq 300 \mu$ A
Ground conductor current $I_{PE}$	$\leq 2 \mu$ A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Earth)	10 kA
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Shield)	10 kA
Total surge current (8/20) $\mu$ s	20 kA
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 500$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Shield) spike	$\leq 150$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) static	$\leq 500$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Shield) static	$\leq 13$ V
Residual voltage at $I_n$ , (conductor-shield)	$\leq 12$ V
Protection level $U_p$ (Core-Earth)	$\leq 500$ V
Protection level $U_p$ (Core-Shield)	$\leq 13$ V
Response time $t_A$ (Core-Earth)	$\leq 100$ ns

Response time tA (Core-GND)	≤ 500 ns
Input attenuation aE, asym.	1.3 dB (≤ 5 MHz)
Cut-off frequency fg (3 dB), asym. (shield) in 50 Ohm system	Typ. 80 MHz
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
	D1 (2.5 kA)

**Connection data**

Type of connection	BNC 75 Ω
Connection type IN	BNC socket
Connection type OUT	BNC plug

**Connection, equipotential bonding**

Type of connection	PVC litz wire
--------------------	---------------

**Connection, protective circuit**

Standards/regulations	IEC 61643-21
-----------------------	--------------

**Certificates / Approvals**



Certification GOST


**Accessories**

Item	Designation	Description
<b>Plug/Adapter</b>		
2805083	BNC-DV 75	BNC connector, double-level, for mounting on NS 32 or NS 35/7.5, wave impedance: 75 Ohm
2805070	BNC-V 75	BNC connector, single-level, for mounting on NS 32 or NS 35/7.5, wave impedance: 75 Ohm

**Diagrams/Drawings**

Circuit diagram

---

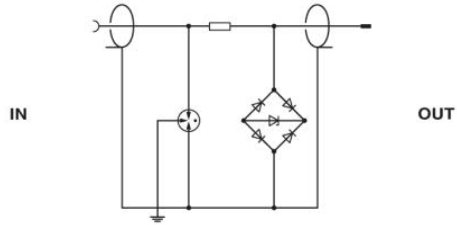

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9