



- 1 ALL DIMENSIONS ARE IN MM.
- 2 BUCHANAN LOGO TO APPEAR ON HOUSING LOCATION
OPTIONAL WHERE SPACE PERMITS.
- 3 NON CUMULATIVE
- 4 PARTS TO BE MARKED WITH PERMANENT BLACK MARKING.
- 5 POSITIONS 1-2, 3-4, AND 7-8 COMMONED. POSITIONS 9-10
NOT LOADED.
- 6 POSITIONS 1-2, 7-8, AND 9-10 COMMONED.

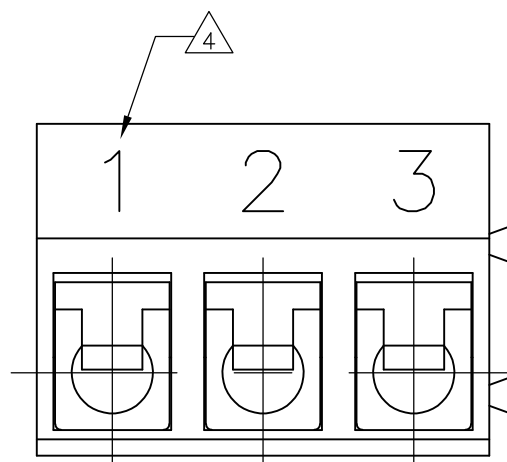


6 5	OBSOLETE	DETAIL F	TIN	50.00	10	5-1776263-2
	OBSOLETE	DETAIL E	TIN	50.00	10	5-1776263-1
	OBSOLETE	DETAIL D	TIN	45.00	9	5-1776263-0
	OBSOLETE		0.254um GOLD	10.00	2	4-1776263-9
	OBSOLETE	DETAIL C	TIN	15.00	3	4-1776263-8
	OBSOLETE		GOLD FLASH	35.00	7	4-1776263-7
	OBSOLETE		GOLD FLASH	30.00	6	4-1776263-6
	OBSOLETE		GOLD FLASH	15.00	3	4-1776263-3
	OBSOLETE		0.381um GOLD	35.00	7	3-1776263-7
	OBSOLETE		0.381um GOLD	30.00	6	3-1776263-6
	OBSOLETE		0.381um GOLD	15.00	3	3-1776263-3
	OBSOLETE		TIN	120.00	24	2-1776263-4
	OBSOLETE		TIN	115.00	23	2-1776263-3
	OBSOLETE		TIN	110.00	22	2-1776263-2
	OBSOLETE		TIN	105.00	21	2-1776263-1
	OBSOLETE		TIN	100.00	20	2-1776263-0
	OBSOLETE		TIN	95.00	19	1-1776263-9
	OBSOLETE		TIN	90.00	18	1-1776263-8
	OBSOLETE		TIN	85.00	17	1-1776263-7
	OBSOLETE		TIN	80.00	16	1-1776263-6
	OBSOLETE		TIN	75.00	15	1-1776263-5
	OBSOLETE		TIN	70.00	14	1-1776263-4
	OBSOLETE		TIN	65.00	13	1-1776263-3
		—	TIN	60.00±0.40	12	1-1776263-2
		—	TIN	55.00±0.40	11	1-1776263-1
		—	TIN	50.00±0.35	10	1-1776263-0
		—	TIN	45.00±0.30	9	1776263-9
		—	TIN	40.00±0.30	8	1776263-8
		—	TIN	35.00±0.25	7	1776263-7
		—	TIN	30.00±0.25	6	1776263-6
		—	TIN	25.00±0.25	5	1776263-5
		—	TIN	20.00±0.25	4	1776263-4
		—	TIN	15.00±0.25	3	1776263-3
		—	TIN	10.00±0.25	2	1776263-2
		DETAIL	FINISH	DIM A	NO OF POS	PART NUMBER

1471-9 (3/11)


LOC	DIST	REVISIONS				
FT	0	P	LTR	DESCRIPTION	DATE	DWN
				SEE SHEET 1	—	—

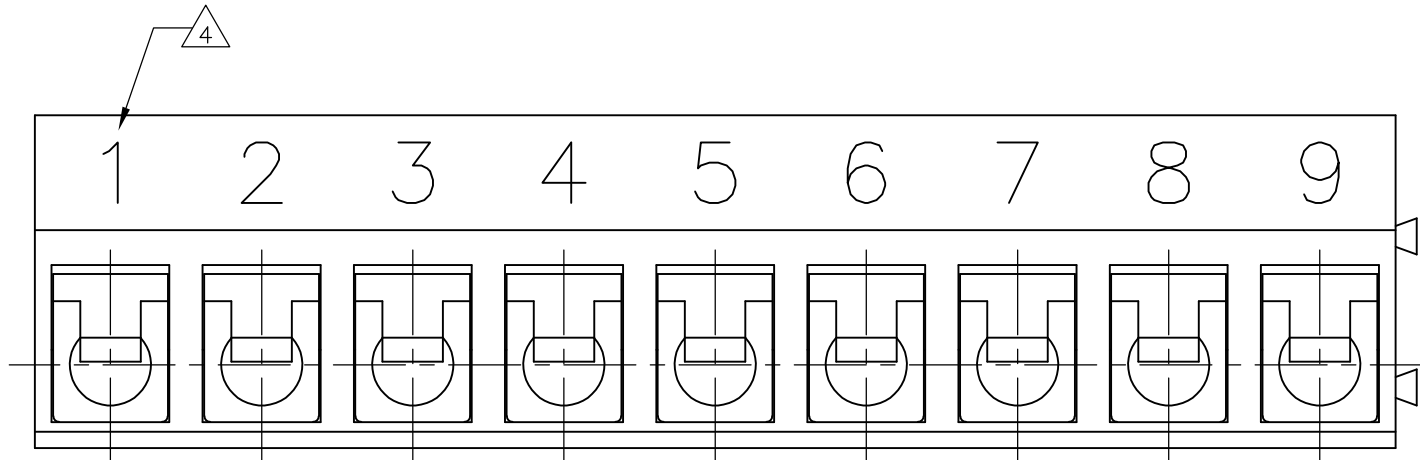

DETAIL D

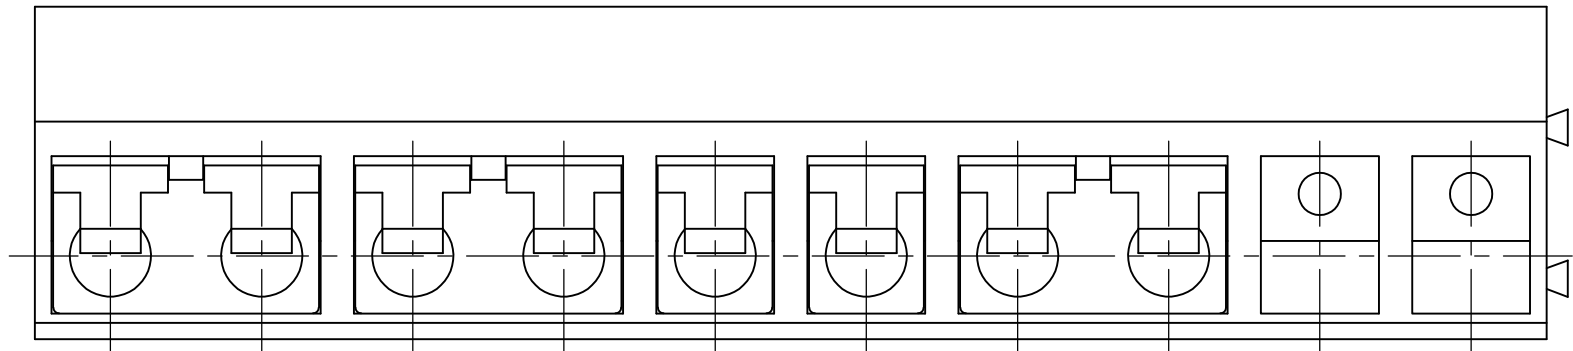

DETAIL E

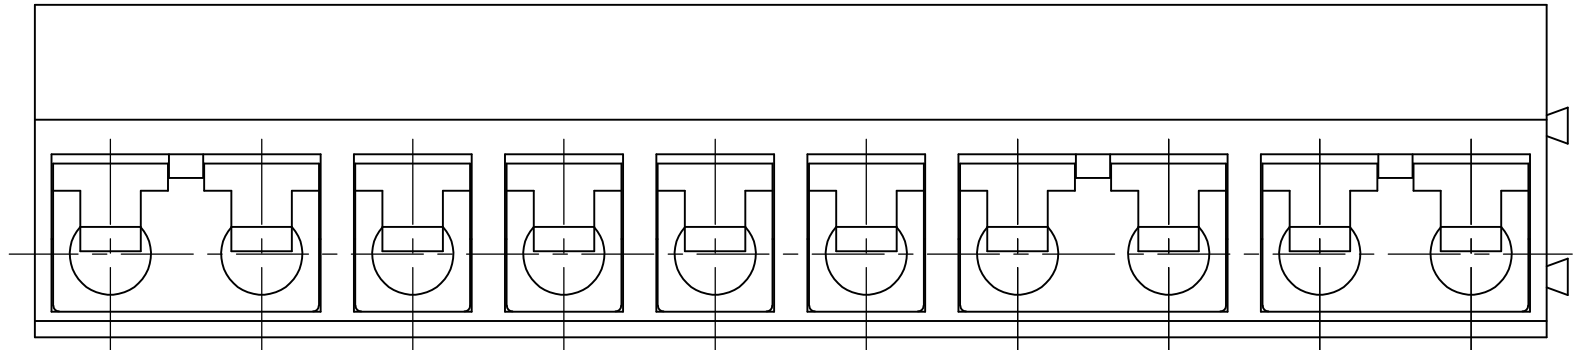

DETAIL F

1. Application and Features:

- 1–1. This terminal block is designed to plug onto loose pins or pin header strips.
- 1–2. With wire guard for wire protection so that the screw doesn't press directly on the wire.
- 1–3. Easy handling due to the pluggable system horizontally or vertically.

2. Technical Data:

- 2–1. Material(blue)
- 2–1–1. Housing: PA 66
- 2–1–2. Metal Housing: Brass
- Finish: see table.
- 2–1–3. Wire Guard: Phoshor Bronze
- 2–1–4. Screw: Steel galvanized and chromitized, M2.6.

2–3. Electrical:

- 2–3–1. Current rating: 10 amps/way max.
- 2–3–2. Contact resistance: 20mohm (MAX).
- 2–3–3. Insulation resistance: 2000Mohm /500V.
- 2–3–4. Withstanding voltage: 1500 VAC/min, test time= 60sec/1pc.
- 2–3–5. Operation voltage: 300 VAC.
- 2–3–6. Wire Range: 16–24 AWG.

2.4 Mechanical:

- 2–4–1. Torque: 3 in–lb.
- 2–4–2. Contact retention Force: 0.2Kg/cm (min).
- 2–4–3. Operating temperature: –40°C to +105°C.
- 2–4–4. Solderability: 95% coverage (min).
- test temperature=230°C±10°C
- test time= 3sec±0.5sec.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN S SCHLEGEL 5/6/05		 TE Connectivity															
			CHK C RICHARD 5/6/05																	
			APVD C RICHARD 5/6/05																	
DIMENSIONS: mm			TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME															
			0 PLC ± -		TERMINAL BLOCK, 90 DEGREE, STACKING W/ WIRE PROTECTION, 5.0mm PITCH															
			1 PLC ± 0.3																	
			2 PLC ± 0.25																	
			3 PLC ± -																	
			4 PLC ± -																	
MATERIAL -			ANGLES ± -		SIZE A2															
			FINISH						CAGE CODE 00779											
			-										DRAWING NO C=1776263							
																	RESTRICTED TO -			
CUSTOMER DRAWING			SCALE 6:1		SHEET 2 of 2		REV A2													

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9