

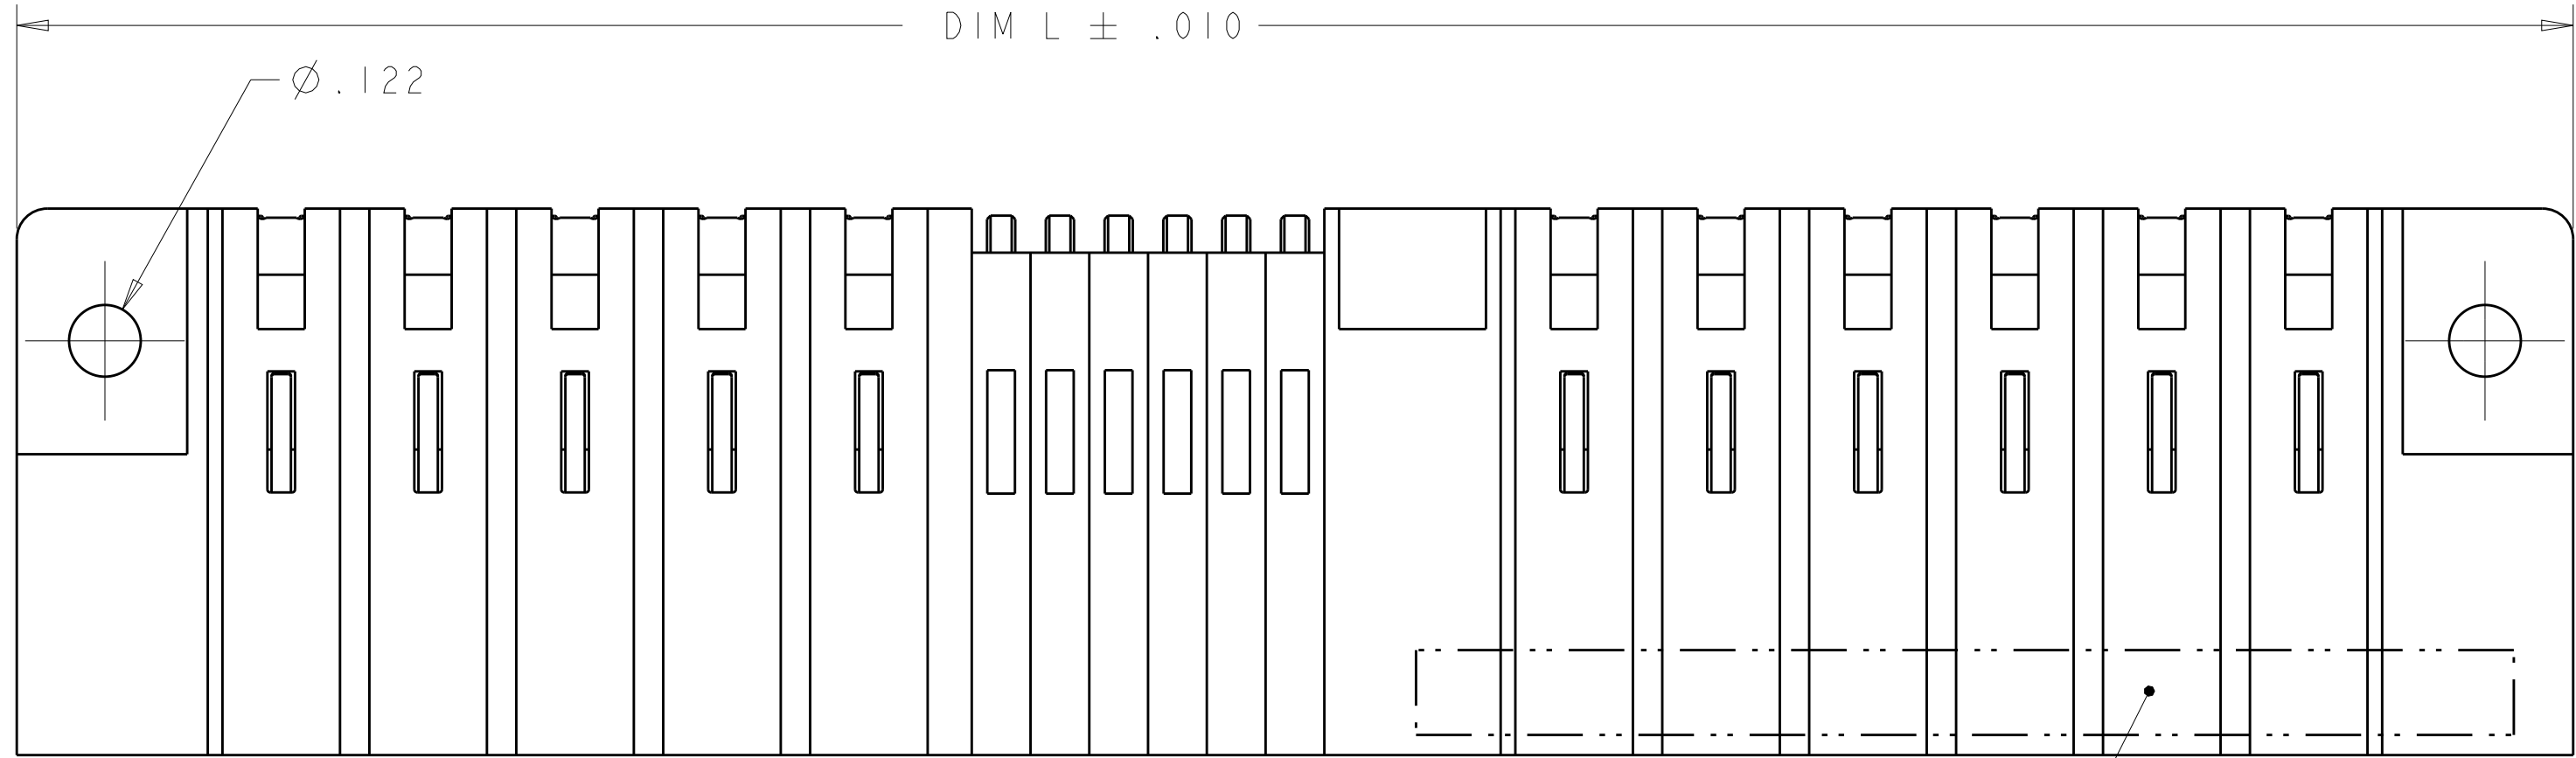
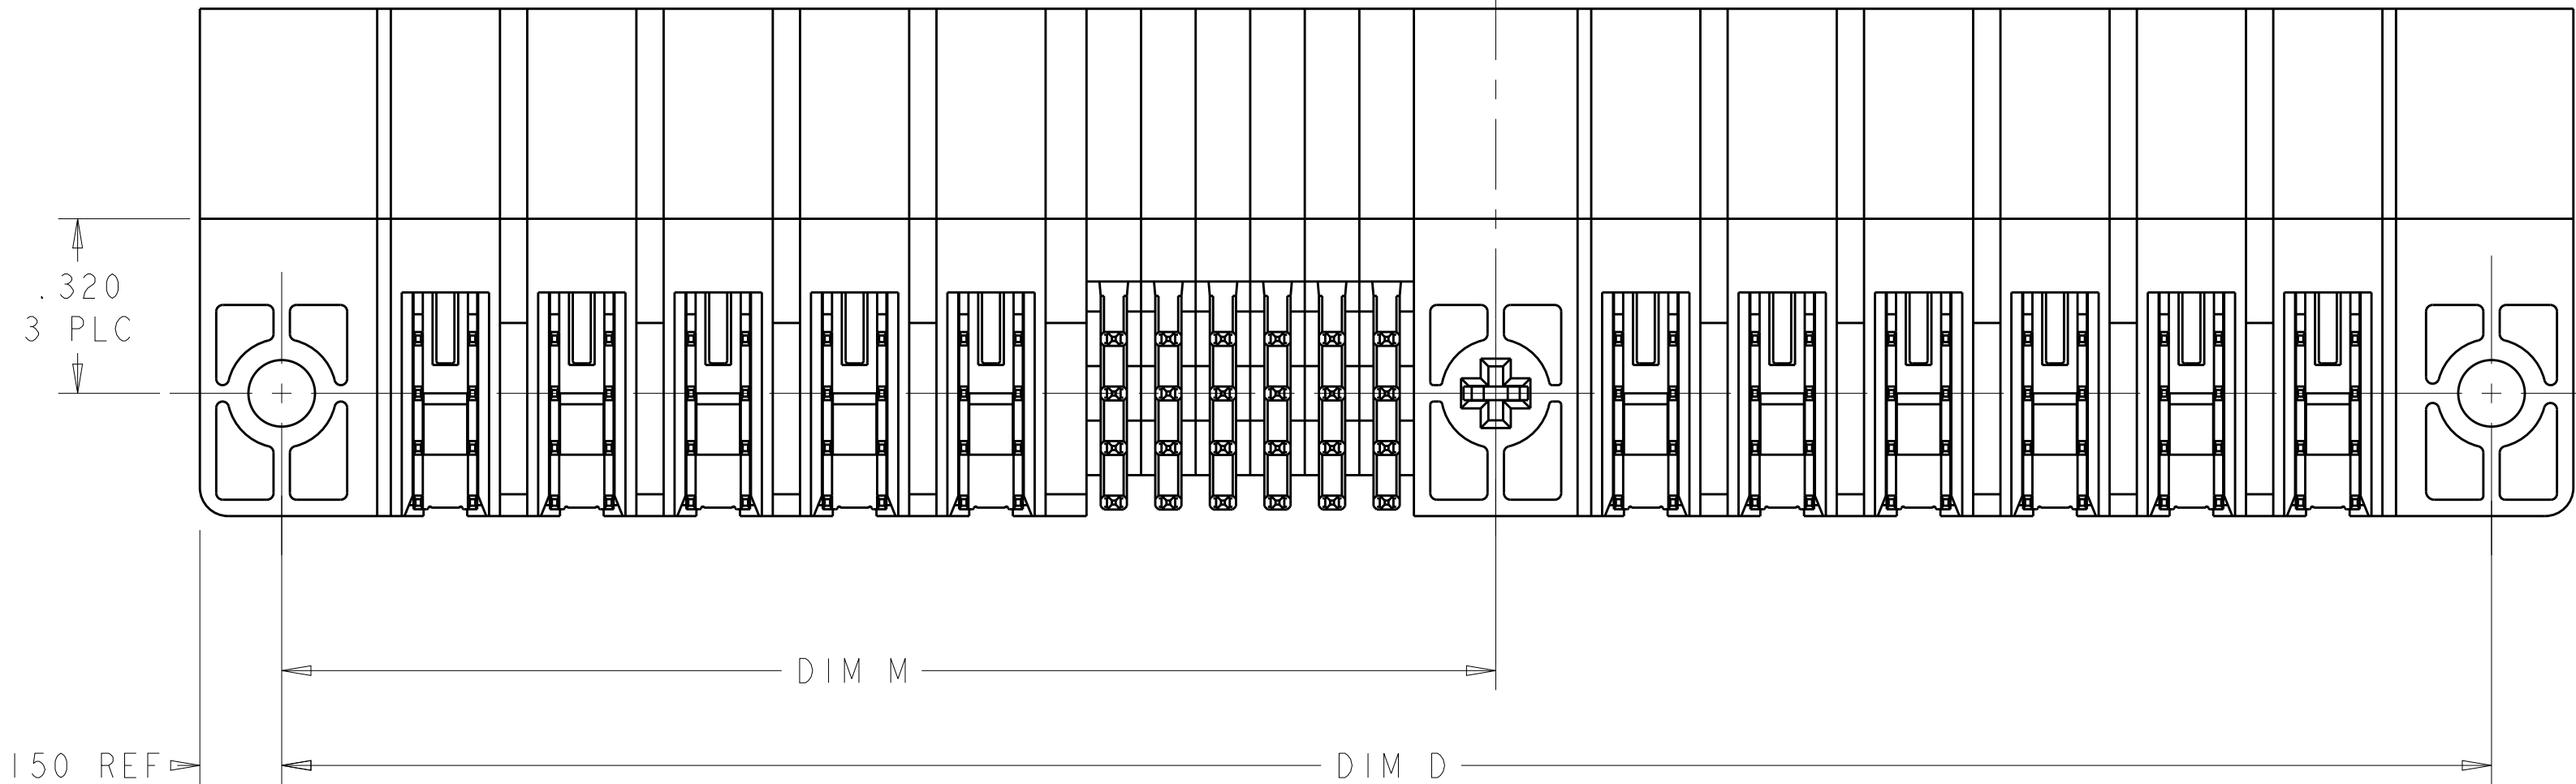
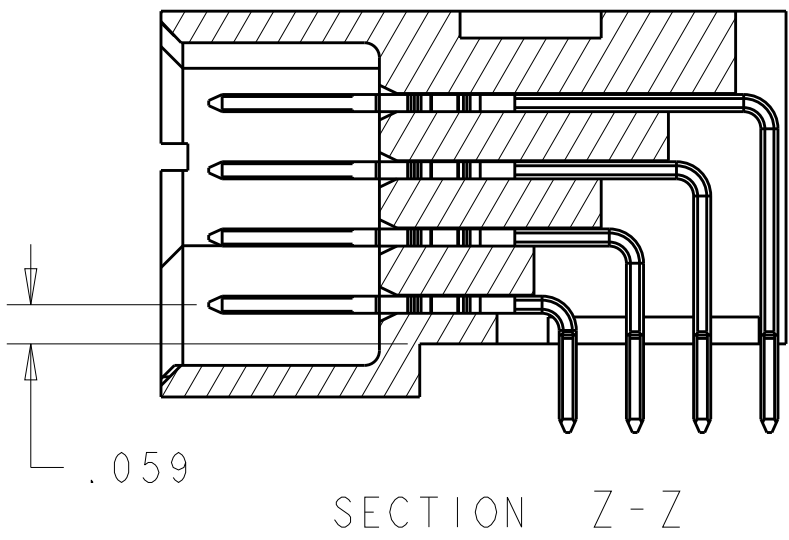


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	ADD NEW DASH NUMBER -16	24APR2014	CZ	SZ

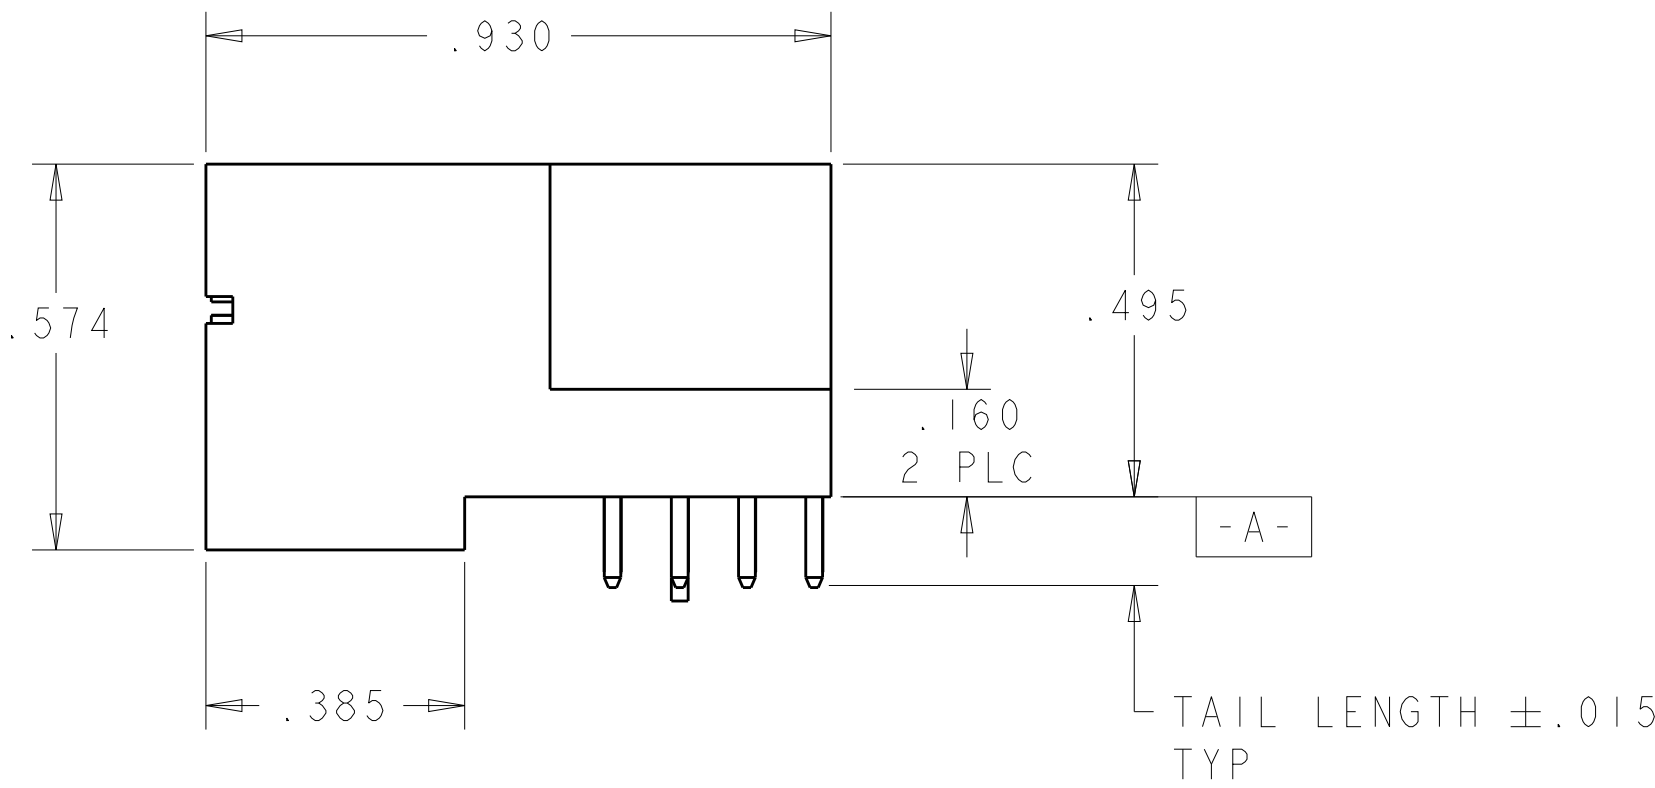


- 1 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB -ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - .0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001-.003 CU PLATING TO ACHIEVE .040±.003 DIAMETER HOLE
- 8 VARIABLE DIMS SHOWN ON VIEW (SHEET 2)
- 9 NOT RELEASED FOR PRODUCTION

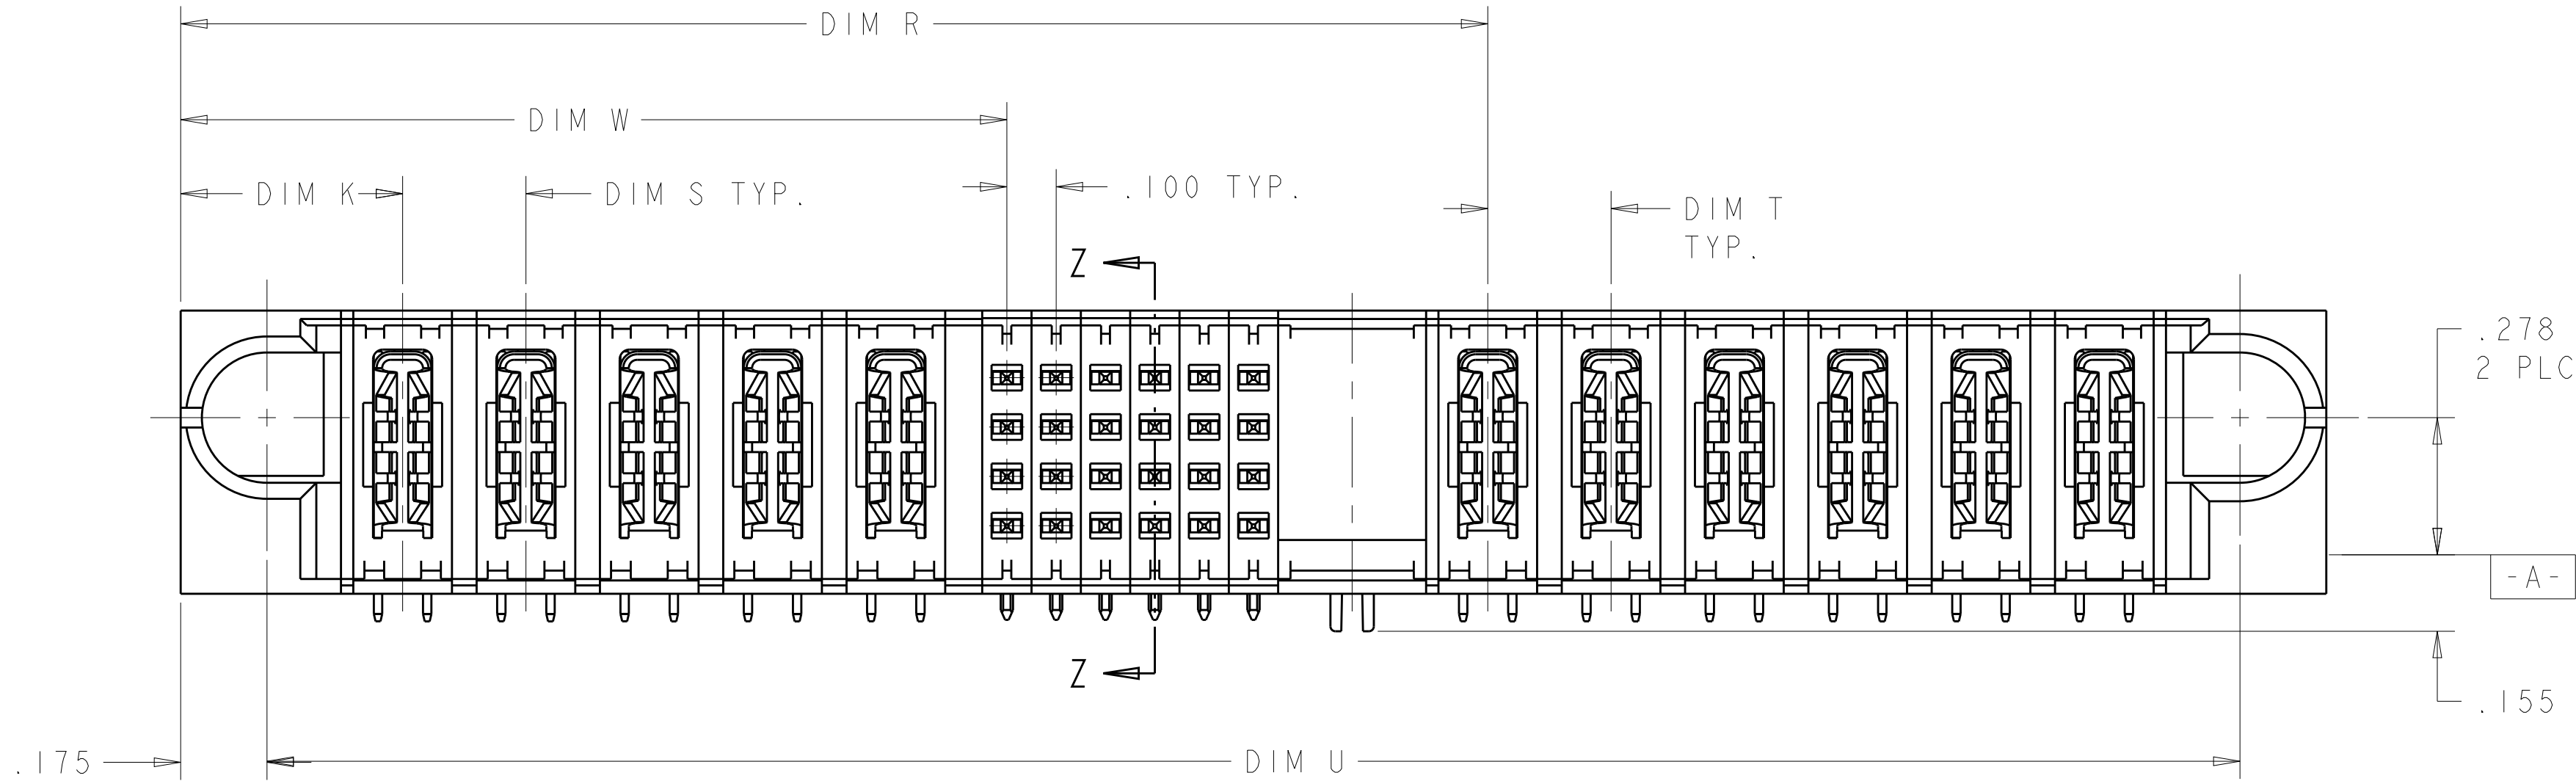


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHERKE APVD M.PERCHERKE	22FEB05 22FEB05	TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020		±.01 ±.01 ±.005 ±.0020 ±.0020		PRODUCT SPEC	
MATERIAL		FINISH		APPLICATION SPEC	
2		3		114-13038	
CUSTOMER DRAWING		WEIGHT		A1	
SCALE		SHEET		REV	
7:2		1 OF 6		B3	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


ⓑ2	2.750	.250	-	2.650	1.375	2.800	-	3.100	.450	4P + 48S + 1P	I-6450230-6
	5.150	.300	.300	3.550	2.700	5.200	-	5.500	.450	8ACP + 32S + 6ACP	I-6450230-5
	2.300	.300	.250	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	6450230-6
	5.450	.250	.250	3.350	2.375	5.500	-	5.800	.450	8P + 36S + 9P	6450230-4
△9	4.275	△8	.250	3.175	2.500	4.325	-	4.625	.475	2ACP + 6P + 24S + 5P	6450230-3
	4.000	.250	.250	2.650	1.675	4.050	2.225	4.350	.450	5P + 24S + 1M + 6P	6450230-2
	4.000	.250	.250	2.650	1.675	4.050	2.225	4.350	.450	5P + 24S + 1M + 6P	6450230-1
	DIM U	DIM S	DIM T	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN R.GRZYBOWSKI	22FEB05	 TE Connectivity	
			CHK M.PERCHEKKE	22FEB05		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.PERCHEKKE	-	NAME
		0 PLC ±"		PRODUCT SPEC		
		1 PLC ±.01		108-1973		
		3 PLC ±.005		APPLICATION SPEC		
		4 PLC ±.0020		114-13038		
MATERIAL		FINISH		WEIGHT		RESTRICTED TO
-		-		-		-
-		-		CUSTOMER DRAWING		SCALE 7:2 SHEET 2 OF 6 REV B.3

PART NUMBER	ROWS		POWER								SIGNAL						POWER					
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	P9	P10	P11	P12	P13	
6450230-3	D C B A																					
										E	J	E	E	J	E							
										K	K	F	K	K	K							
										N	N	N	G	N	N							
										H	S	H	H	S	H							
2ACP + 6P + 24S + 5P																						

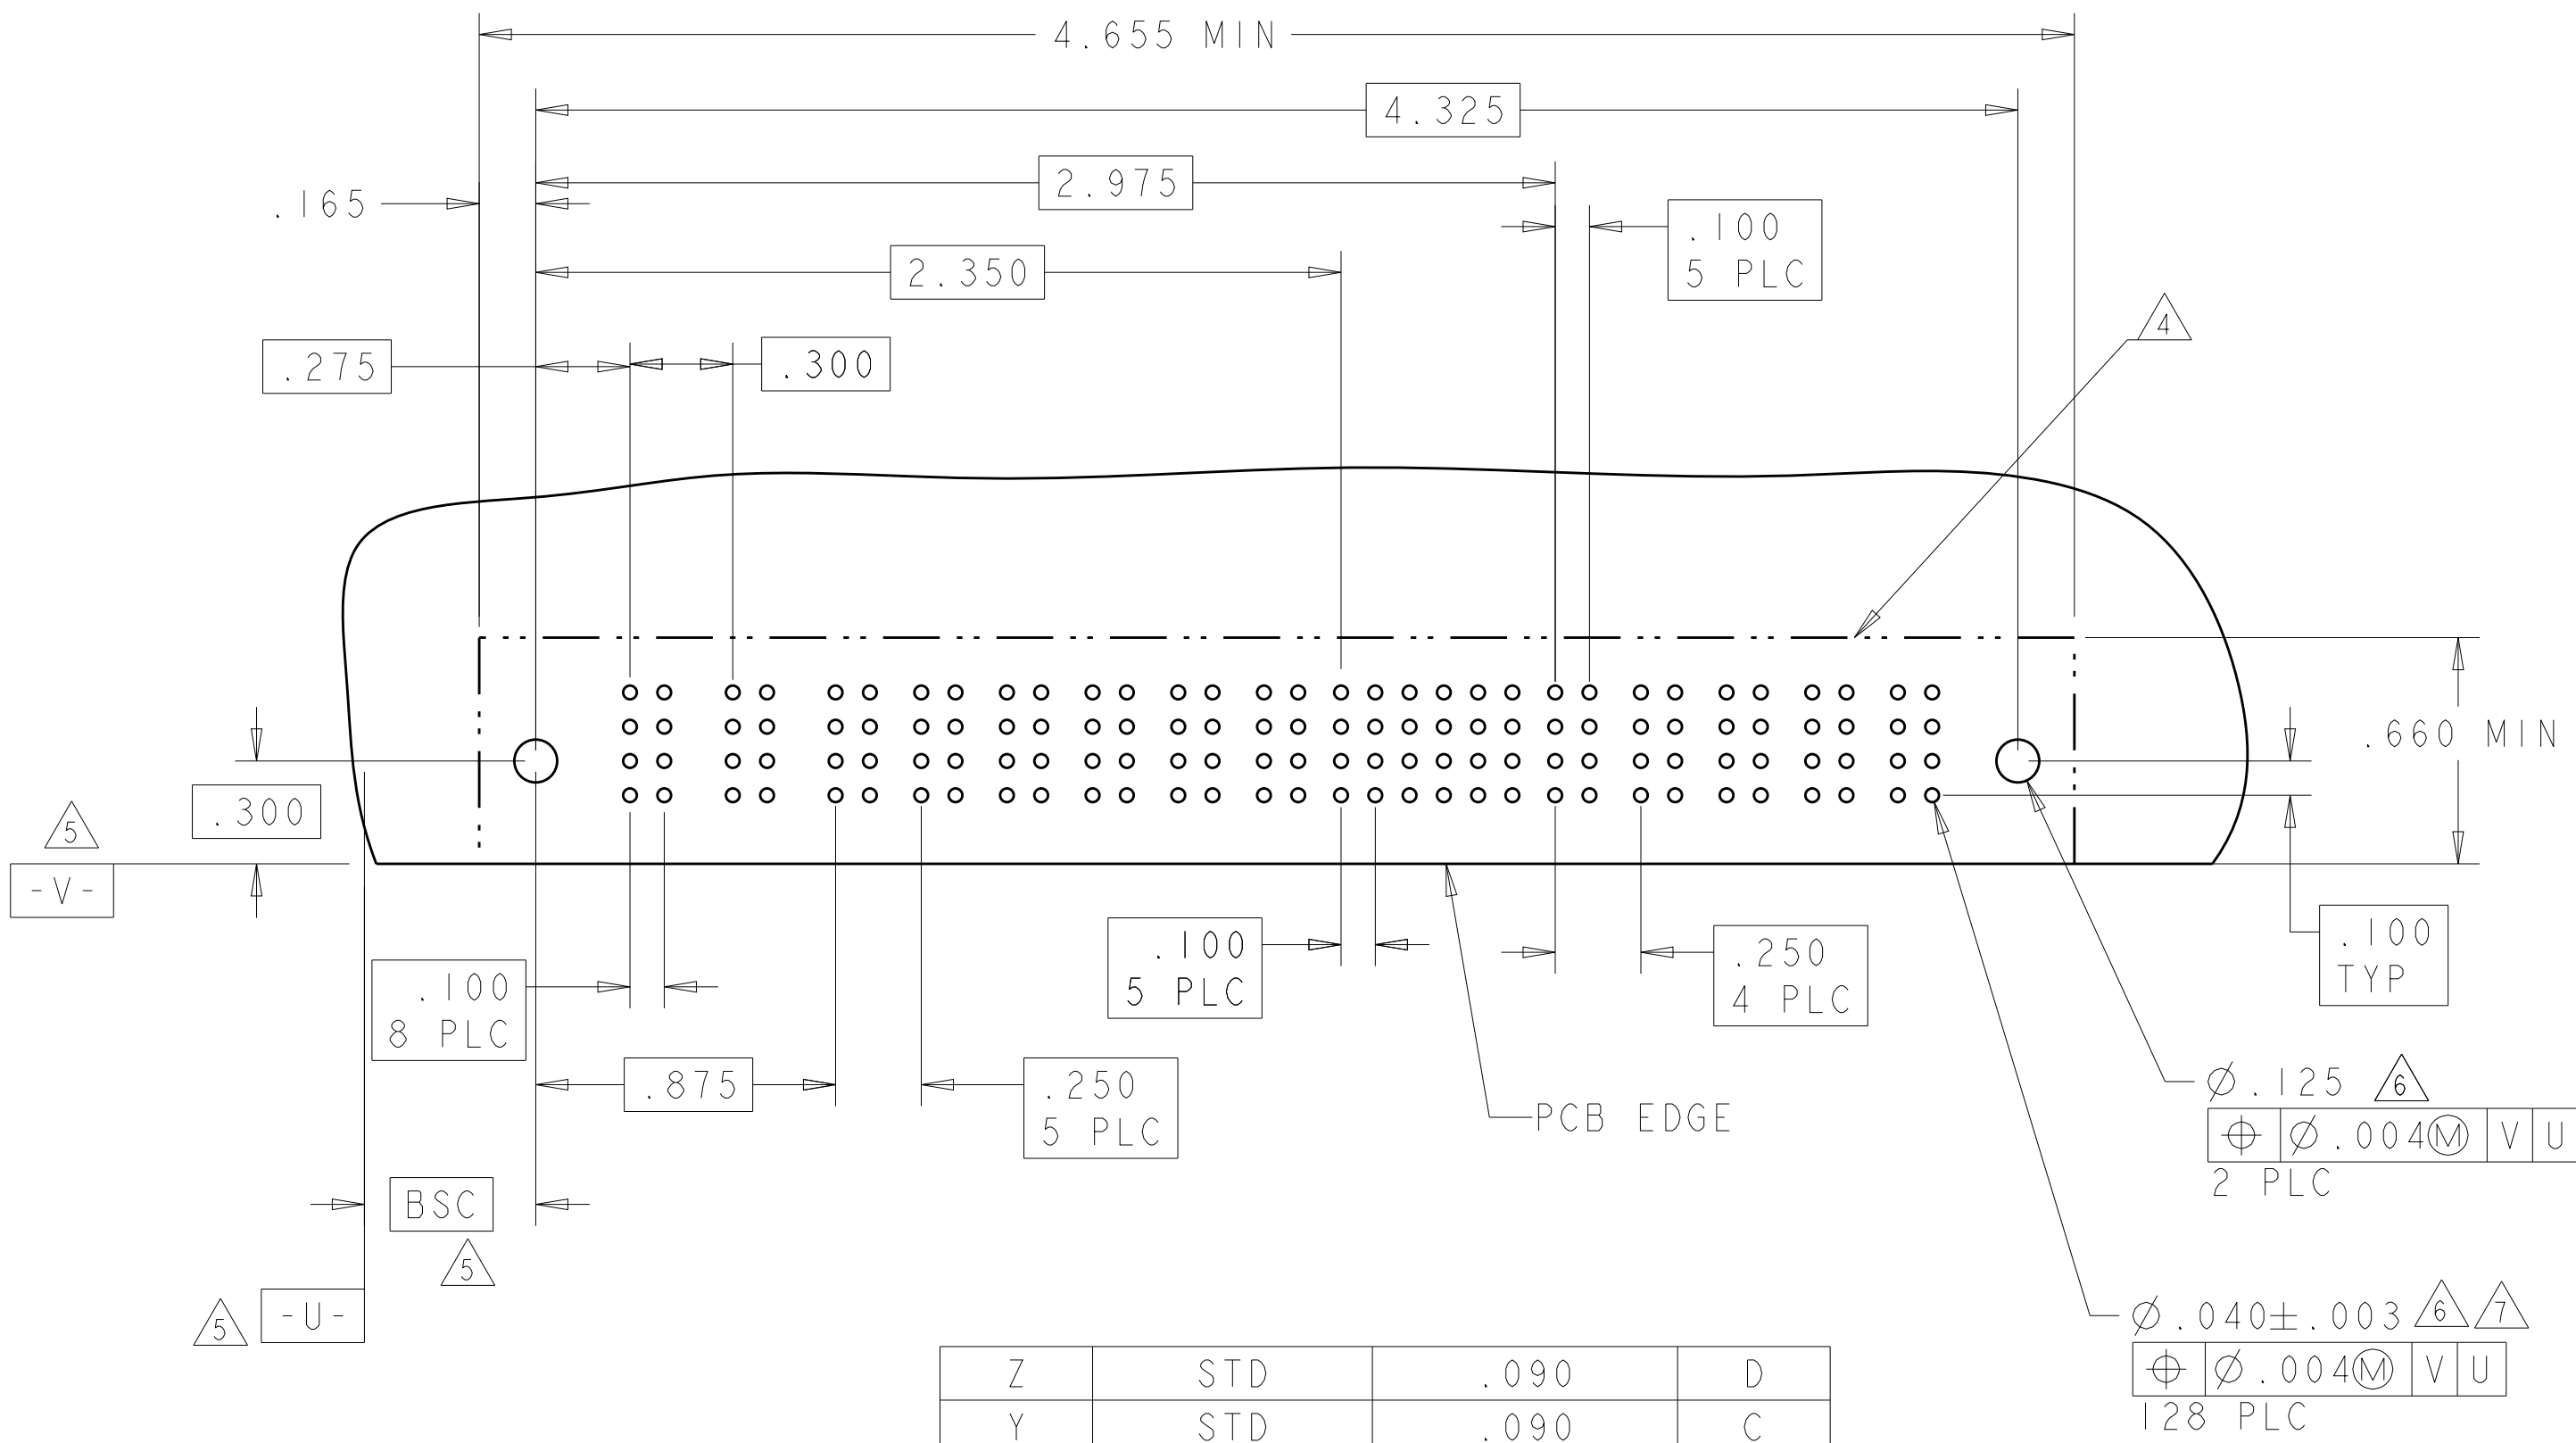


PM	.135
PA	.090
CODE	TAIL LENGTH
POWER CONTACT	

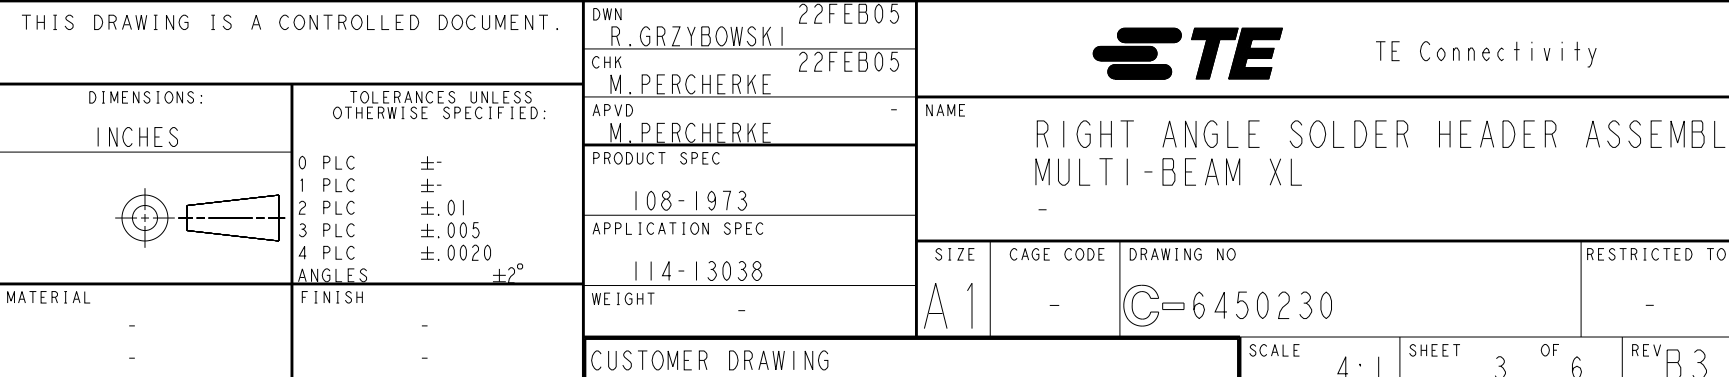[illegible]

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER								SIGNAL									POWER								
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	P9	P10	P11	P12	P13	P14	P15	P16	
6450230-4	D C B A		PM	PM	PM	PM	PM	PM	PM	PM	J	J	J	J	J	J	J	E	J	PM	PM	PM	PM	PM	PM	PM	PM	PM
											K	K	K	K	K	K	K	K	K									
											N	N	N	N	N	N	N	N	N									
											S	S	S	S	S	S	S	S	S									
8P + 36S + 9P																												

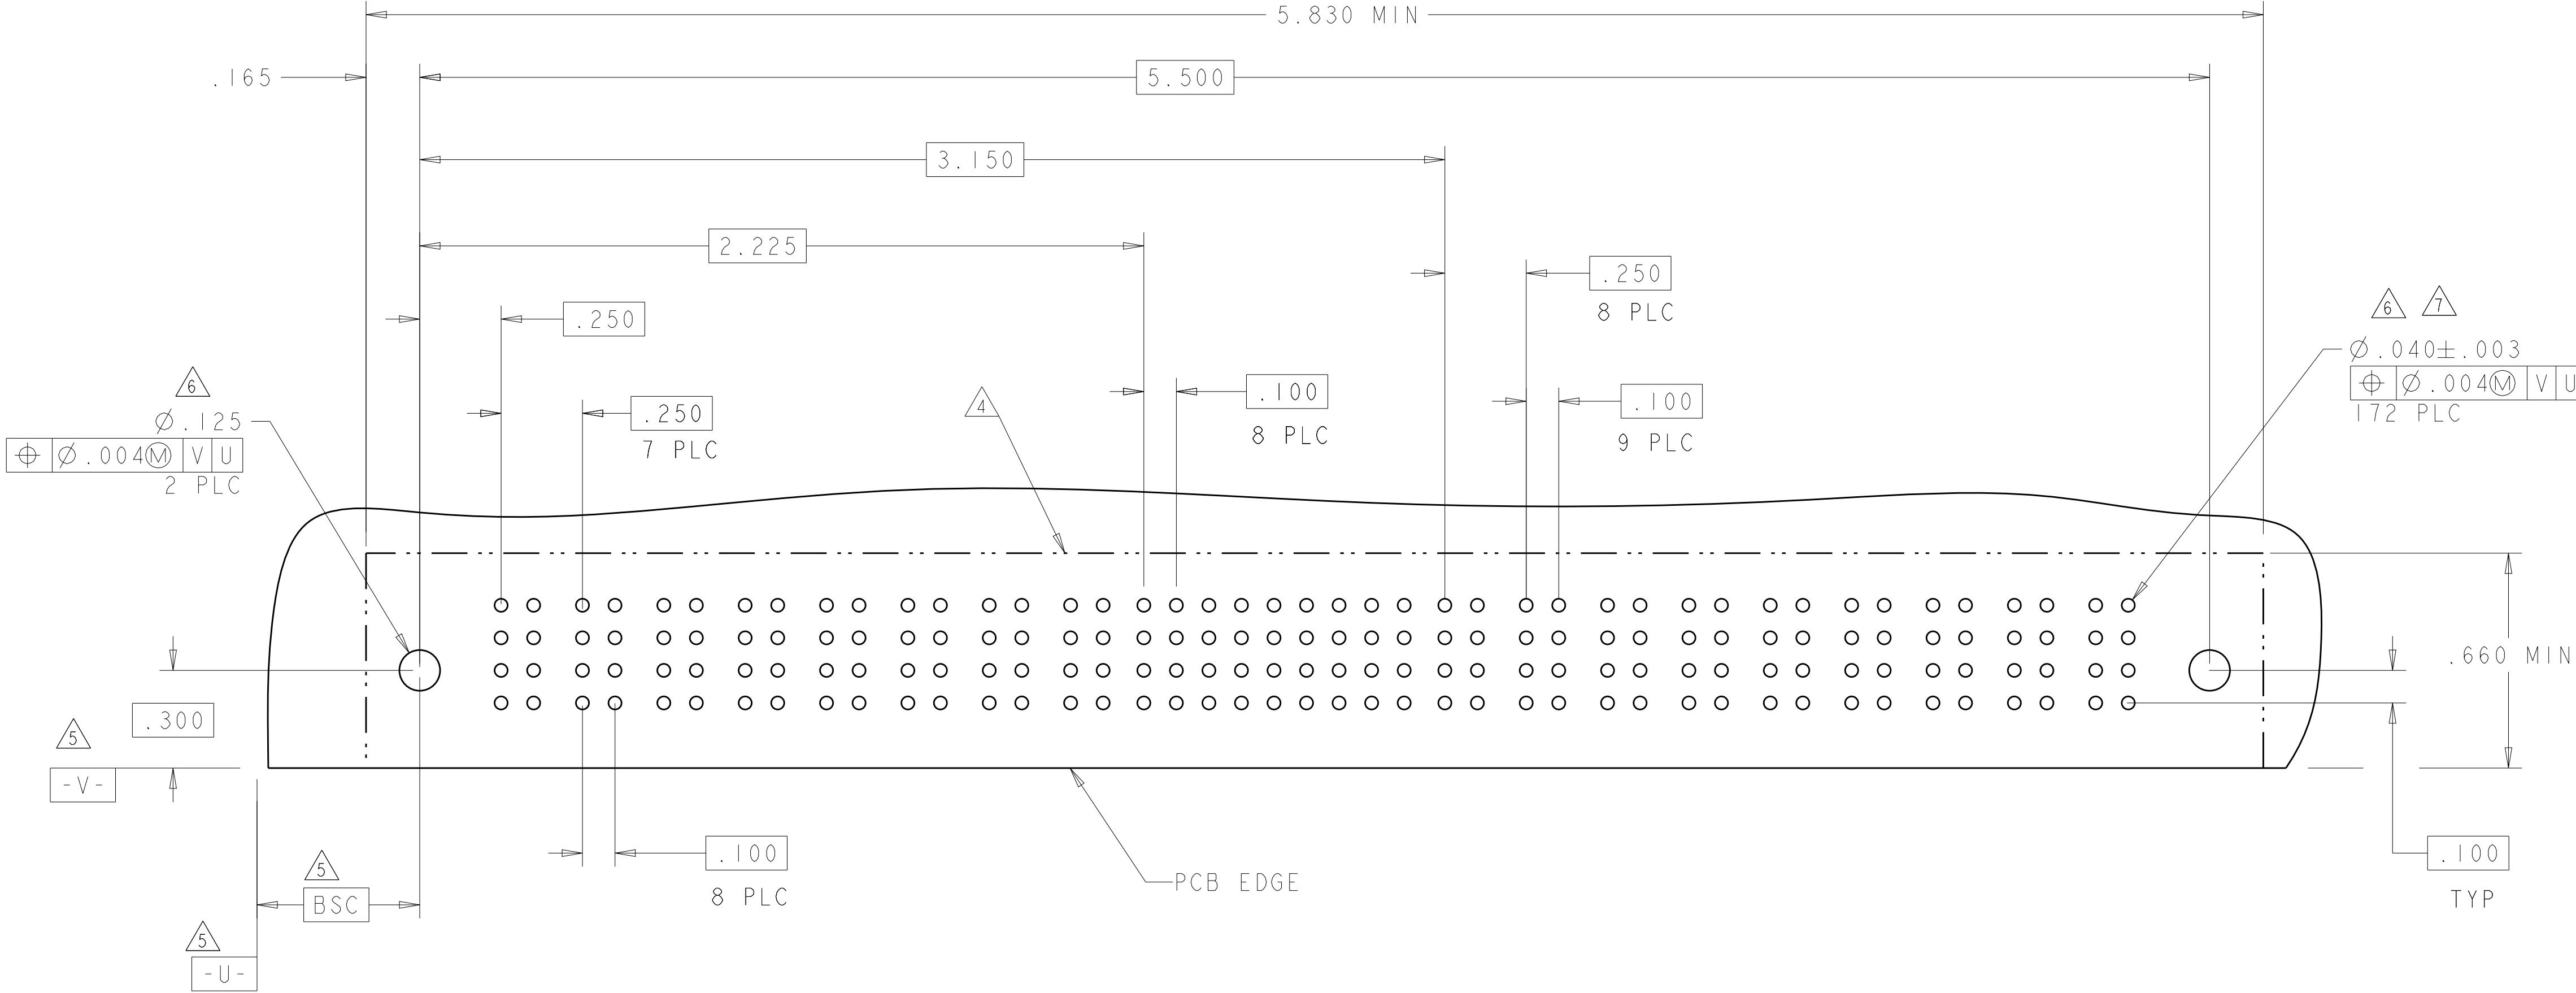

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

22FEB05
22FEB05
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±"
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT

NAME
RIGHT ANGLE SOLDER HEADER ASSEMBLY
MULTI-BEAM XL

SIZE
A1

CAGE CODE
-

DRAWING NO.
C=6450230

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
7:2

SHEET
4

OF
6

REV
B3

TE Connectivity



4805 (3/13)

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER		
			P1	P2	P3	1	2	3	4	5	6	P4	P5	
6450230-6	D C B A					J	J	J	J	J	J			
						K	K	K	K	K	K			
						N	N	N	N	N	N			
						S	S	S	S	S	H			
3ACP + 24S + 2P														

PART NUMBER	ROWS		POWER				SIGNAL												POWER		
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	11	12	P4		
1-6450230-6	D		PM	PM	PM	PM	E			E	J		J		J	E		E	PM		
	C						F	F	F	F		K		K		F		F			
	B								G		N		N		N	G		N			
	A						H	H	H	H	H		S		H		H				
4P + 48S + 1P																					

BLANK SIGNAL PINS ARE UNLOADED PINS

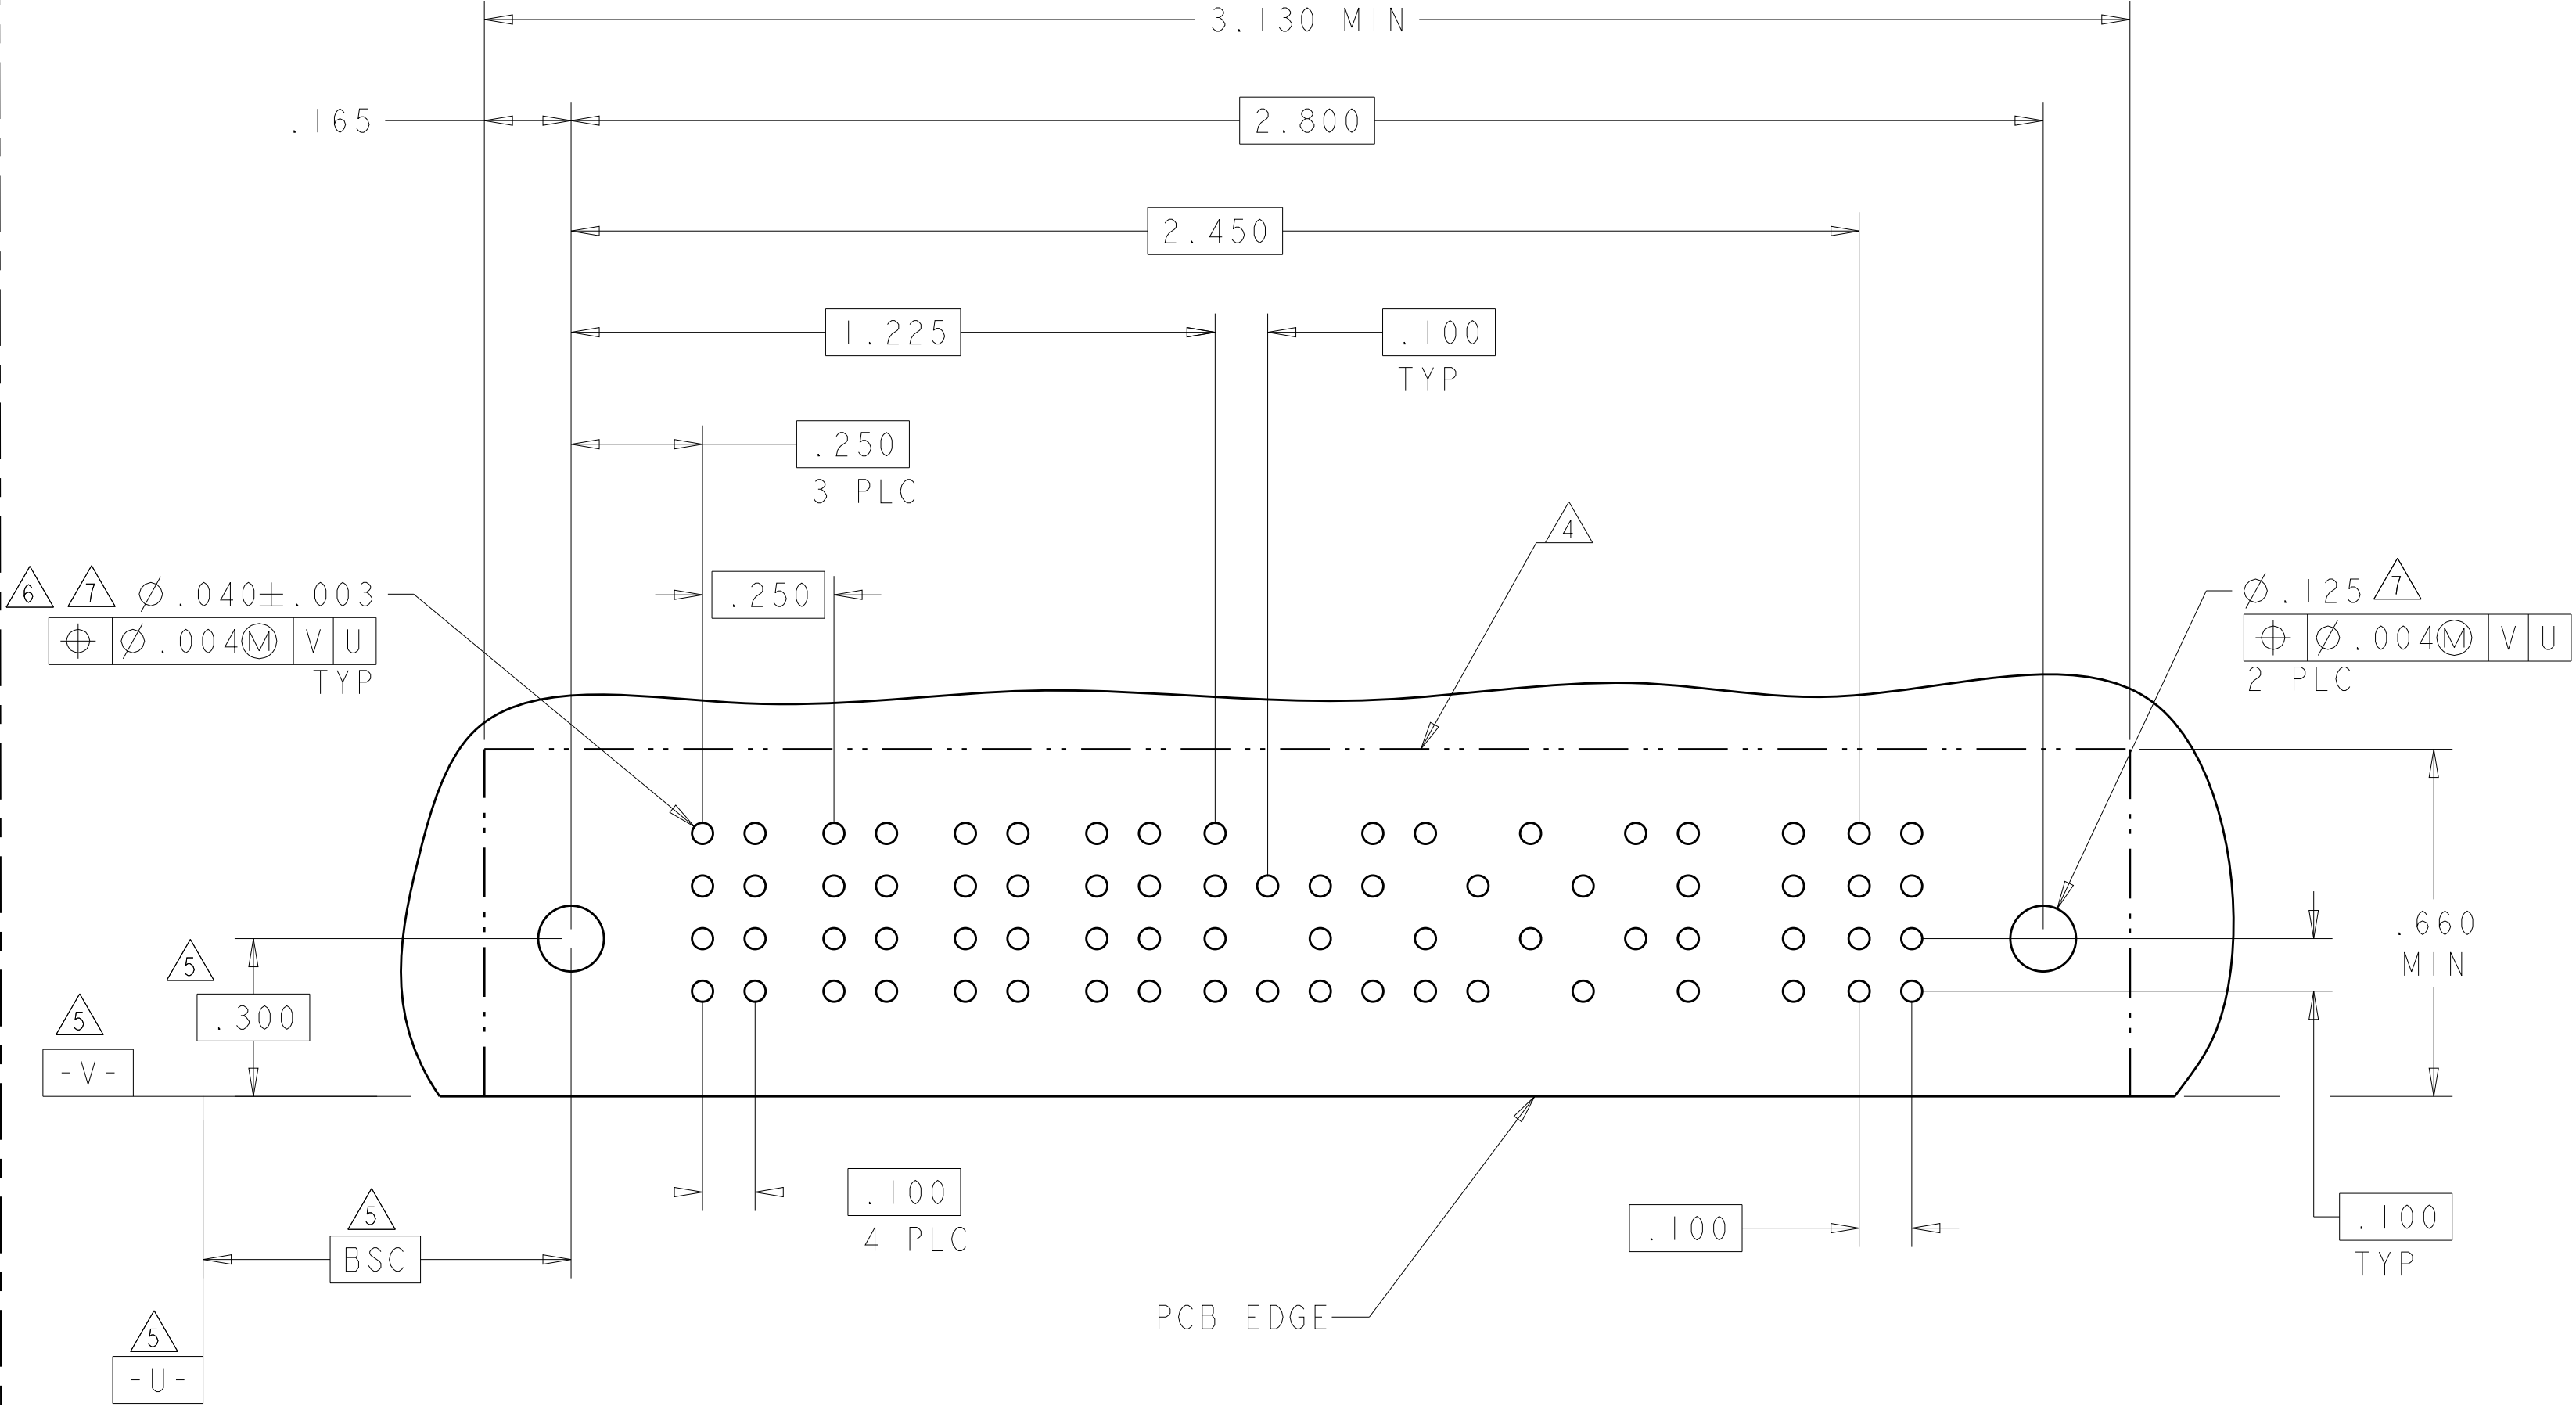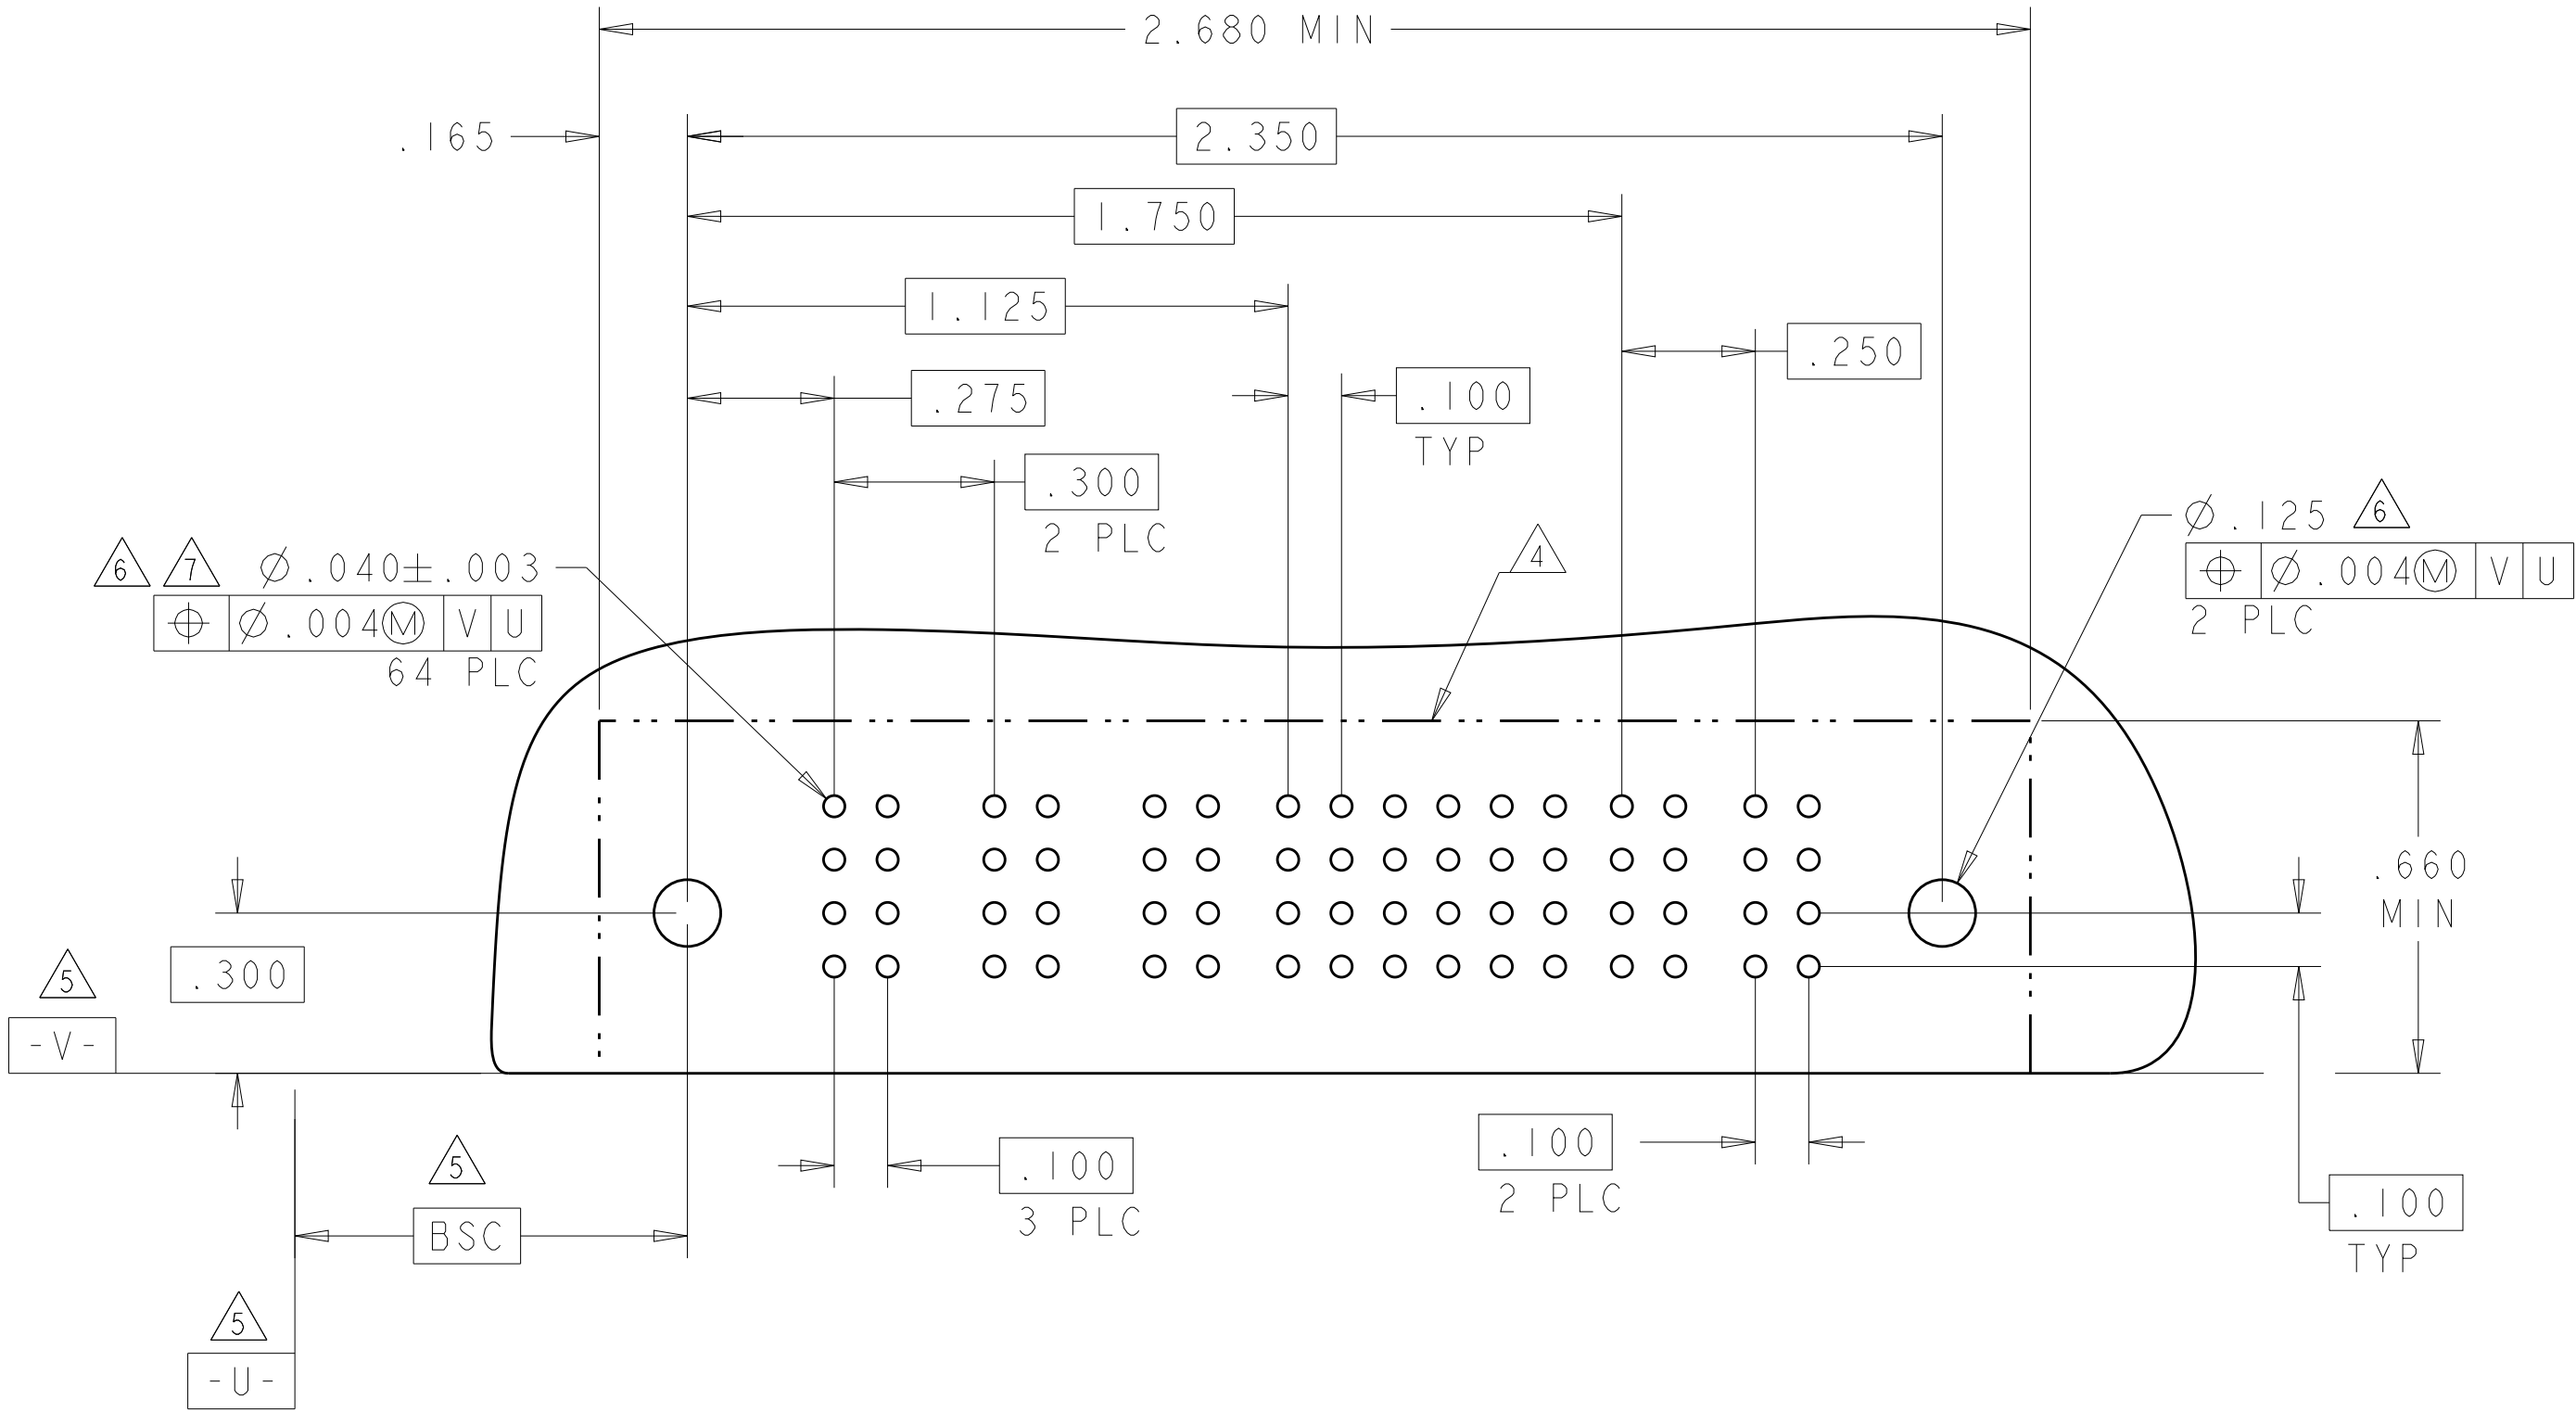

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

22FEB05
22FEB05
-

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
CUSTOMER DRAWING

NAME
RIGHT ANGLE SOLDER HEADER ASSEMBLY
MULTI-BEAM XL

SIZE
A1

CAGE CODE
-

DRAWING NO.
6450230

RESTRICTED TO
-

SCALE
7:2

SHEET
5


OF
6

REV
B3

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL								POWER																																																																																																																																																																																																																																																																																																																												
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	P9	P10	P11	P12	P13	P14																																																																																																																																																																																																																																																																																																																							
1-6450230-5	D C B A																																																																																																																																																																																																																																																																																																																																														

NO CONTACT LOADED

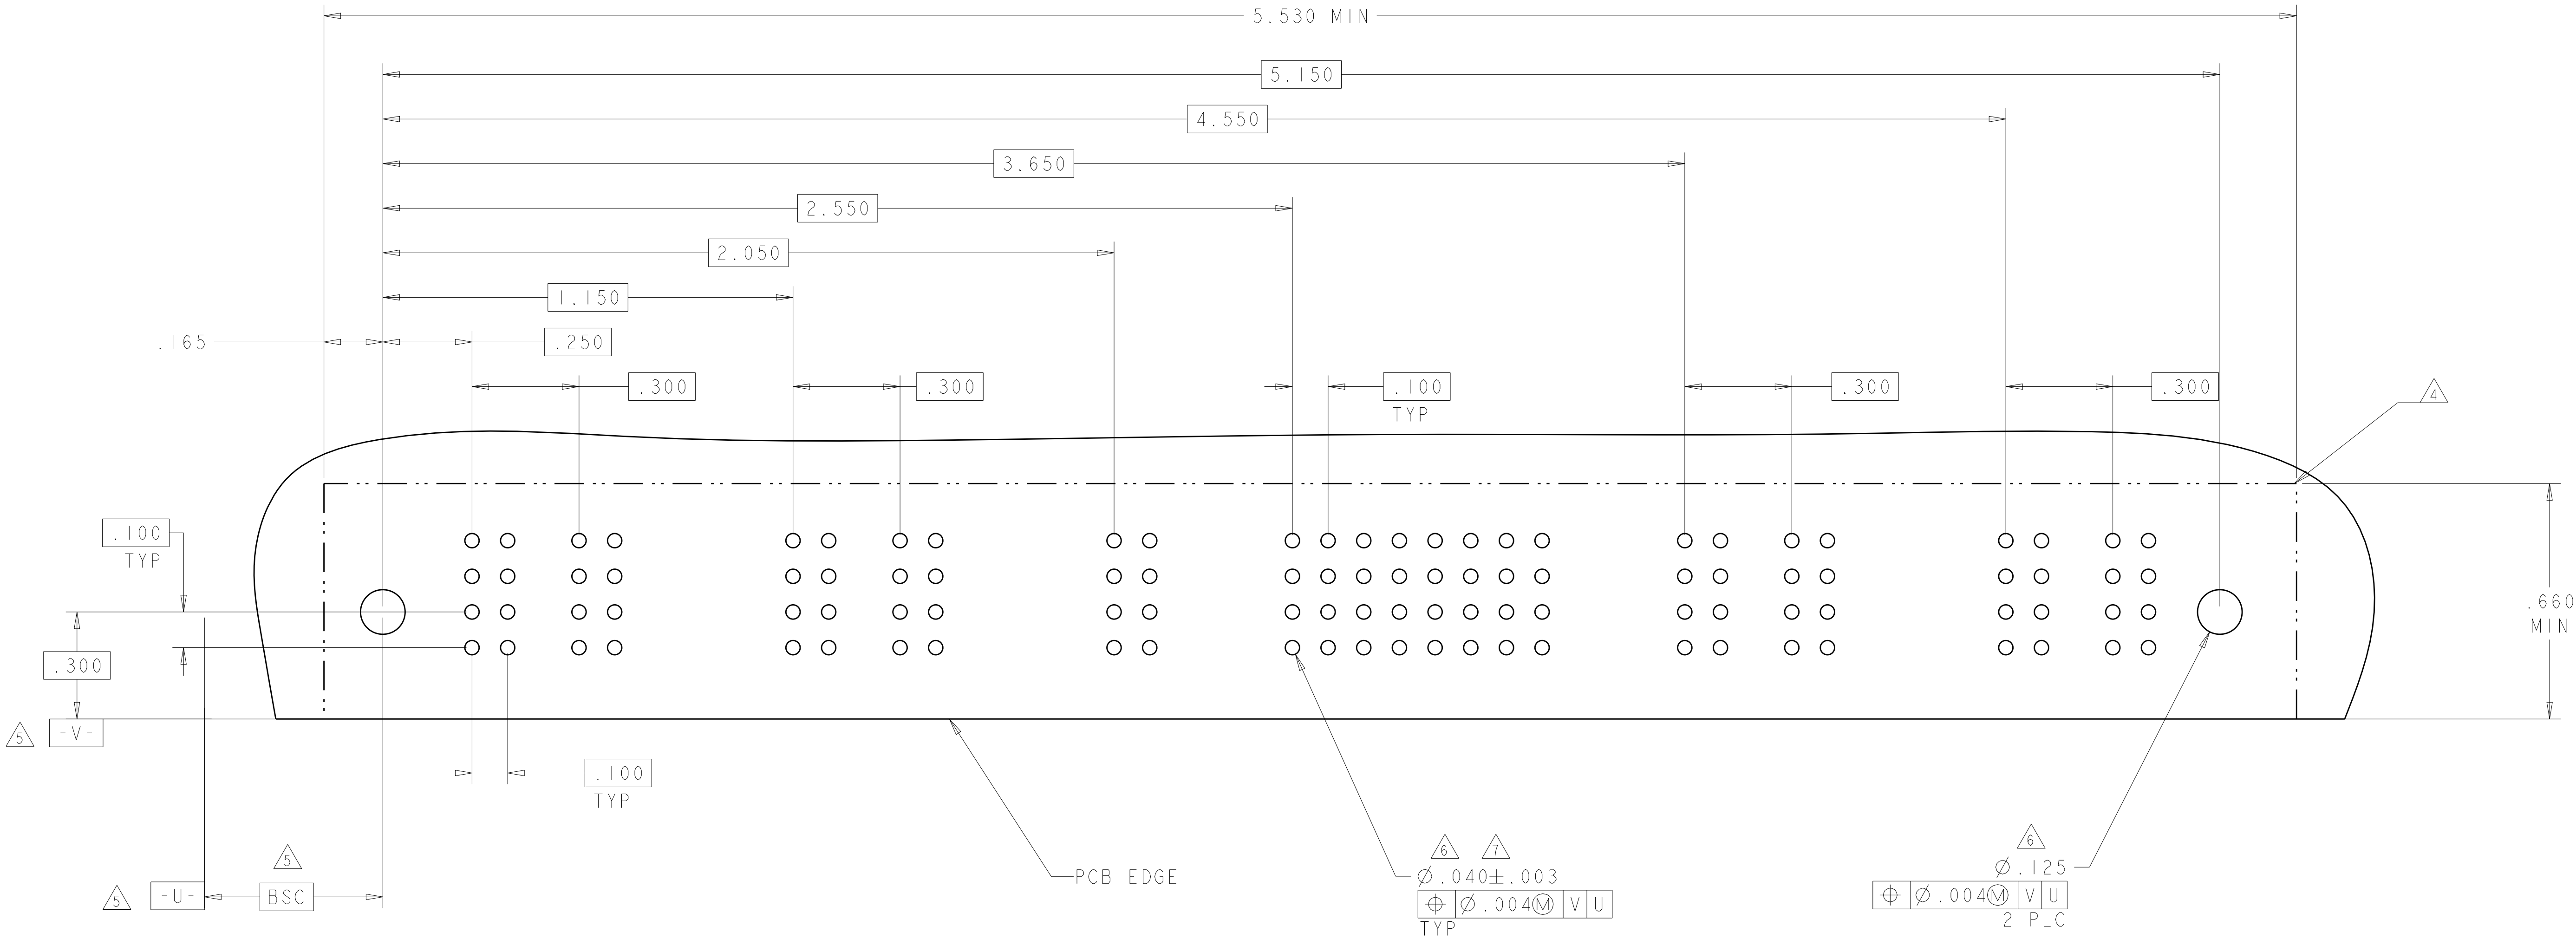

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 22FEB05
CHK M.PERCHEKKE 22FEB05
APVD M.PERCHEKKE -

NAME

DIMENSIONS:
INCHES

MATERIAL
-
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

WEIGHT
-

CUSTOMER DRAWING

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

SIZE
A1

CAGE CODE
-

DRAWING NO
C=6450230

RESTRICTED TO
-

SCALE
7:2

SHEET
6

OF
6

REV
B3

TE Connectivity

RIGHT ANGLE SOLDER HEADER ASSEMBLY
MULTI-BEAM XL

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9