

Aluminum Capacitors, Power High Ripple for Traction, Screw Terminals



FEATURES

- Long useful life: > 10 000 h at +85 °C
- Available in case sizes up to Ø 90 mm x 220 mm
- Low ESR
- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, cylindrical aluminum case, insulated with a blue sleeve
- Pressure relief in the sealing
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


**RoHS
COMPLIANT**

APPLICATIONS

- Traction (metro/subway, light rail, streetcars/tram)
- Heavy duty applications
- Various industrial applications

MARKING

The capacitors are marked with the following information:

- Rated capacitance (in µF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (Q for -10 %/+30 %)
- Rated voltage (in V)
- Date code (YYMM or in 2 digits according to IEC 60062)
- Name of manufacturer
- Code for factory of origin
- “-” sign to identify the negative terminal, visible from the top and side of the capacitor
- Code number
- Climatic category in accordance with IEC 60068

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case size (Ø D x L in mm)	76 x 146 to 76 x 220 ⁽¹⁾
Rated capacitance range (E6 series), C _R	6000 µF ⁽¹⁾
Tolerance on C _R	-10 %/+30 %
Rated voltage range, U _R	250 V to 450 V ⁽¹⁾
Category temperature range	-40 °C to +85 °C
Useful life at 85 °C	> 10 000 h
Useful life at 70 °C	> 40 000 h
Useful life at 40 °C, 1.4 x I _R applied	> 400 000 h
Shelf life at 0 V, 85 °C	500 h
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	40/085/056

Note

- ⁽¹⁾ Other values available on request.

SELECTION CHART FOR C_R, U_R, AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm)

C _R (µF)	U _R (V)				
	250	300	350	400	450
6000	76 x 146	76 x 220	76 x 220	76 x 220	76 x 220

Note

- Other values available on request.

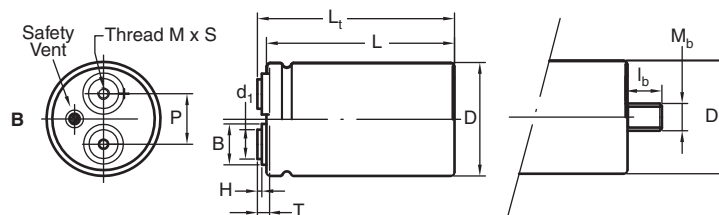
DIMENSIONS in millimeters AND AVAILABLE FORMS


Fig. 1 A: High current M5 and M6-13 mm disc: Screw Terminal (ST) and Screw Terminal Bolt nut (STB)

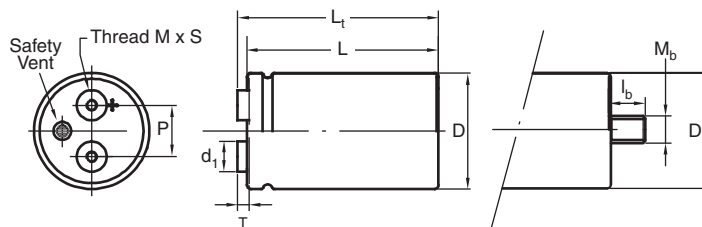


Fig. 1 B: High current M6-18 mm disc and 1/4-28 UNF disc: Screw Terminal (ST) and Screw Terminal Bolt nut (STB)

Note

- Maximum permissible torque which may be applied to the termination screws: 2 Nm for M5; 2.5 Nm for M6 and 1/4-28 UNF. For accessories refer to document "Mounting Accessories", see www.vishay.com/doc?28348. The capacitors are delivered with screws and washers.

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES														
DESIGN	DRAWING	L ± 1	L _t ± 1	D ± 1	P ± 0.3	T	H ± 0.3	B ± 0.3	d ₁ ± 0.1	M	S ± 1	M _b	l _b ± 0.1	MASS (g)
76 x 146 M5-13 mm	1A	145.8	150.2	76.4	31.8	4.4	2.0	18.3	13.0	M5	9.5	M12	16	1000
76 x 146 M6-13 mm	1A	145.8	150.2	76.4	31.8	4.4	2.0	18.3	13.0	M6	9.5	M12	16	1000
76 x 146 M6-18 mm	1B	145.8	153.0	76.4	31.8	7.2	n/a	18.3	17.3	M6	10.0	M12	16	1000
76 x 146 1/4-28 UNF	1B	145.8	153.0	76.4	31.8	7.2	n/a	18.3	17.3	1/4-28 UNF	10.0	M12	16	1000
76 x 220 M5-13 mm	1A	219.8	224.2	76.4	31.8	4.4	2.0	18.3	13.0	M5	9.5	M12	16	1500
76 x 220 M6-13 mm	1A	219.8	224.2	76.4	31.8	4.4	2.0	18.3	13.0	M6	9.5	M12	16	1500
76 x 220 M6-18 mm	1B	219.8	227.0	76.4	31.8	7.2	n/a	18.3	17.3	M6	10.0	M12	16	1500
76 x 220 1/4-28 UNF	1B	219.8	227.0	76.4	31.8	7.2	n/a	18.3	17.3	1/4-28 UNF	10.0	M12	16	1500

Note

- For bolt version holds:
L = L standard -0.5 mm
L_t = L_t standard -0.5 mm

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES		
DESIGN	PACKAGING QUANTITIES (units per box)	CARDBOX DIMENSIONS L x W x H (mm)
76 x 146	12	377 x 375 x 168
76 x 220	18	520 x 270 x 280

Note

- For bolt version holds:
H cardboard box: +10 mm



ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	Rated capacitance at 100 Hz, tolerance -10 %/+30 %
I_R	Rated RMS ripple current at 100 Hz, 85 °C
I_{L5}	Max. leakage current after 5 min at U_R
ESR	Max. equivalent series resistance at 100 Hz
Z	Max. impedance at 20 kHz

Note

- Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20\text{ °C}$, $P = 86\text{ kPa}$ to 106 kPa , $RH = 45\text{ %}$ to 75 %

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION										
U_R (V)	C_R 100 Hz (μF)	CASE SIZE $\varnothing D \times L$ (mm)	I_R 100 Hz 85 °C (A)	I_L 5 min (mA)	ESR (m Ω)		Z (m Ω)		ORDERING CODE ⁽¹⁾	
					MAX.	TYP.	MAX.	TYP.	ST	ST BOLT NUT
250	6000	76 x 146	18.35	3.0	17.6	9.7	11.5	6.9	MAL211013602E3	MAL211023602E3
									MAL211033602E3	MAL211043602E3
									MAL211053602E3	MAL211063602E3
									MAL211073602E3	MAL211083602E3
300	6000	76 x 220	18.35	3.6	25.3	13.9	20.0	12.0	MAL211010602E3	MAL211020602E3
									MAL211030602E3	MAL211040602E3
									MAL211050602E3	MAL211060602E3
									MAL211070602E3	MAL211080602E3
350	6000	76 x 220	18.49	4.2	24.0	13.2	18.6	11.2	MAL211015602E3	MAL211025602E3
									MAL211035602E3	MAL211045602E3
									MAL211055602E3	MAL211065602E3
									MAL211075602E3	MAL211085602E3
400	6000	76 x 220	18.45	4.8	23.8	13.1	18.6	11.2	MAL211016602E3	MAL211026602E3
									MAL211036602E3	MAL211046602E3
									MAL211056602E3	MAL211066602E3
									MAL211076602E3	MAL211086602E3
450	6000	76 x 220	19.76	5.4	19.1	10.5	13.6	8.2	MAL211017602E3	MAL211027602E3
									MAL211037602E3	MAL211047602E3
									MAL211057602E3	MAL211067602E3
									MAL211077602E3	MAL211087602E3

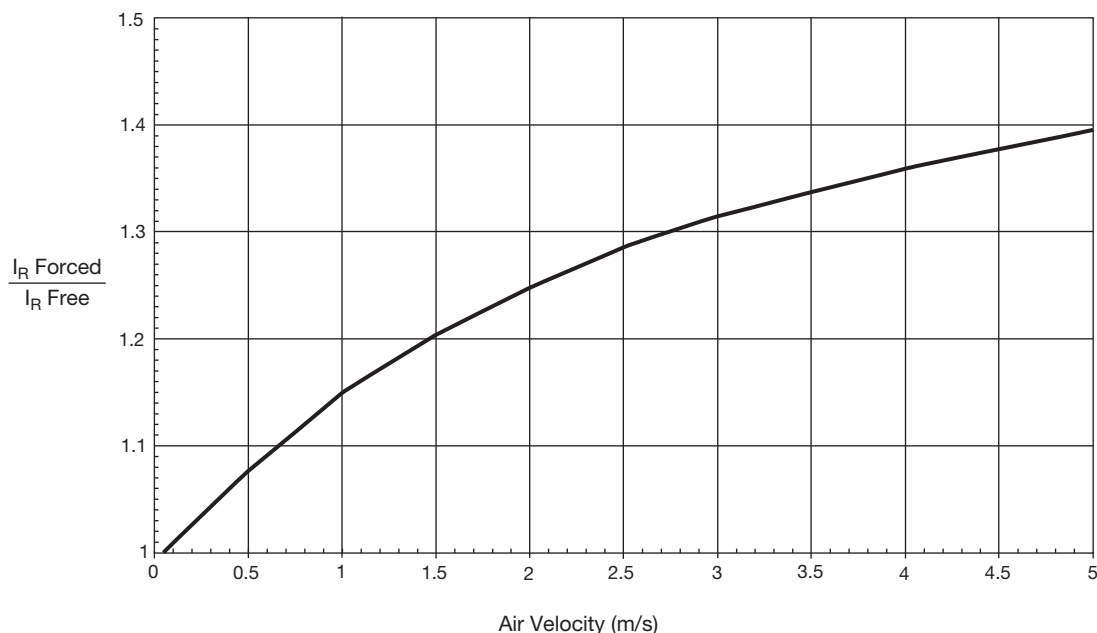
Note

- ⁽¹⁾ Underlined 8th digit determines form: for details see "Part Number Explanation" table

PART NUMBER EXPLANATION (Example: 350 V, 6000 μF, M6-13 mm disc)													
1 2 3 4	5 6 7	8	9	10 11 12	13 14								
MAL2	110	3	5	602	E3								
PREFIX	SERIES NAME	FORM	VOLTAGE	CAPACITANCE									
						</							

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage		$U_S = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
Current		
Leakage current	After 1 min at U_R	$I_{L1} \leq 0.006 C_R \times U_R$
	After 5 min at U_R	$I_{L5} \leq 0.002 C_R \times U_R$
Inductance		
Equivalent series inductance (ESL)		Typ. 20 nH ⁽¹⁾

Note
⁽¹⁾ Low ESL designs available on request

RIPPLE CURRENT AND USEFUL LIFE

Fig. 2 - Multiplier of ripple current (I_R) as a function of air flow

MAXIMUM RIPPLE CURRENT			
PARAMETER	CONDITION	MAXIMUM RIPPLE CURRENT MULTIPLIER	VALUE
Ambient temperature (T_{amb})	70 °C	From nomogram; see Fig. 3	1.6
Operating frequency (f)	400 Hz	From frequency; see Table 3	1.3
Air flow	2 m/s	From air flow; see Fig. 2	1.25

Note

- Calculation example for 110 series. maximum ripple current multiplier = $1.6 \times 1.3 \times 1.25 = 2.6$

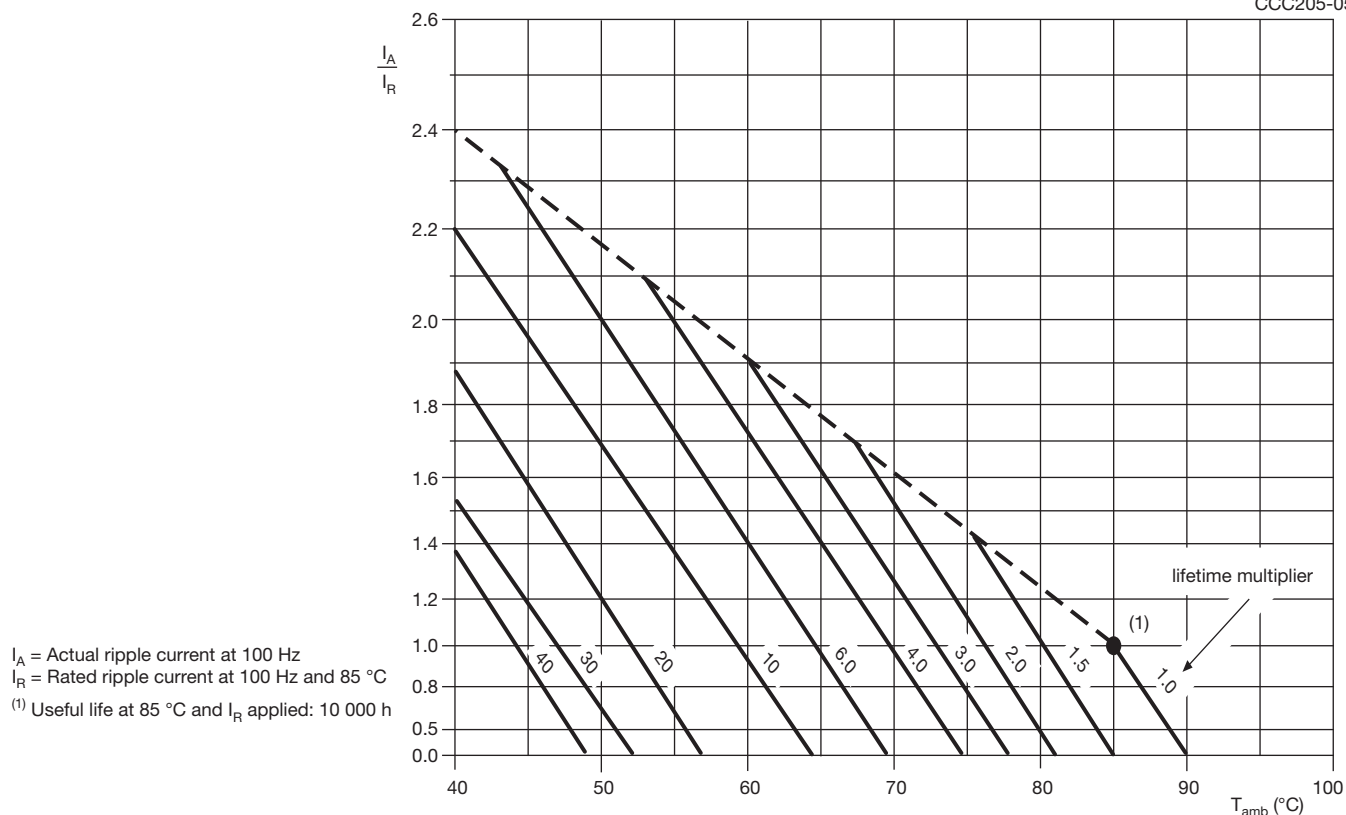


Fig. 3 - Multiplier of useful life as a function of ambient temperature and ripple current load

Table 3

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY	
FREQUENCY (Hz)	I_R MULTIPLIER
50	0.90
100	1.00
200	1.20
400	1.30
1000	1.40
10 000	1.50



Table 4

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/EN130300 subclause 4.13	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R applied; 2000 h	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R and I_R applied	$\Delta C/C: \pm 30\%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage Total failure percentage: $\leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/EN130300 subclause 4.17	$T_{amb} = 85\text{ }^{\circ}\text{C}$; no voltage applied; 500 h after test: U_R to be applied for 30 min, 24 h to 48 h before measurement	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9