


3C[®] color coded planar cable — 135 series

- Fast, low-cost mass termination.
- Precise spacing for controlled electrical characteristics.
- Color coded for easy identification.
- Double contour allows termination from either side of cable.
- Easy conductor separation for circuit routing.
- UL recognized 
- CSA certified, available

description

3C Controlled Characteristics Cable is ideal for applications in digital and analog signal transmission. 3C color-coded cables are designed for mass-termination techniques including Spectra-Strip IDC connectors. With conductor centers the same as the contact centers of the connector, separation and stripping of individual conductors is completely eliminated. The color coding allows easy circuit tracing and routing.


Spectra-Strip 3C color-coded cable consists of stranded round conductors preinsulated with color-coded PVC and laminated on specific centers between layers of clear PVC film to form a planar cable. 3C cable is available in 100-foot putups, packaged in dispenser boxes.

Spectra-Strip has the ability to custom design a ribbon cable for your exact needs. We can provide you with exact electrical and mechanical characteristics by varying the conductor spacing and cable insulation. For custom designs, please consult the Spectra-Strip factory.

order information

Series 843-135-2801 28 AWG, 7/36 .050" centers

| Part Number | No. Cond. | Width 'A' | | Span 'B' | |
|------------------|-----------|-----------|---------|------------|--------------|
| | | Inches | (mm) | Inches | (mm) |
| 843-135-2801-010 | 10 | .505 | (12,83) | .450±.015 | (11,43±0,38) |
| 843-135-2801-014 | 14 | .705 | (17,91) | .650±.015 | (16,51±0,38) |
| 843-135-2801-016 | 16 | .805 | (20,45) | .750±.015 | (19,05±0,38) |
| 843-135-2801-020 | 20 | 1.005 | (25,53) | .950±.015 | (24,13±0,38) |
| 843-135-2801-024 | 24 | 1.205 | (30,61) | 1.150±.015 | (29,21±0,38) |
| 843-135-2801-025 | 25 | 1.255 | (31,88) | 1.200±.015 | (30,48±0,38) |
| 843-135-2801-026 | 26 | 1.305 | (33,15) | 1.250±.015 | (31,75±0,38) |
| 843-135-2801-034 | 34 | 1.705 | (43,31) | 1.650±.015 | (41,91±0,38) |
| 843-135-2801-036 | 36 | 1.805 | (45,85) | 1.750±.015 | (44,45±0,38) |
| 843-135-2801-037 | 37 | 1.855 | (47,12) | 1.800±.015 | (45,72±0,38) |
| 843-135-2801-040 | 40 | 2.005 | (50,93) | 1.950±.020 | (49,53±0,51) |
| 843-135-2801-050 | 50 | 2.505 | (63,63) | 2.450±.020 | (62,23±0,51) |
| 843-135-2801-060 | 60 | 3.005 | (76,33) | 2.950±.020 | (74,93±0,51) |
| 843-135-2801-064 | 64 | 3.205 | (81,41) | 3.205±.020 | (80,01±0,51) |

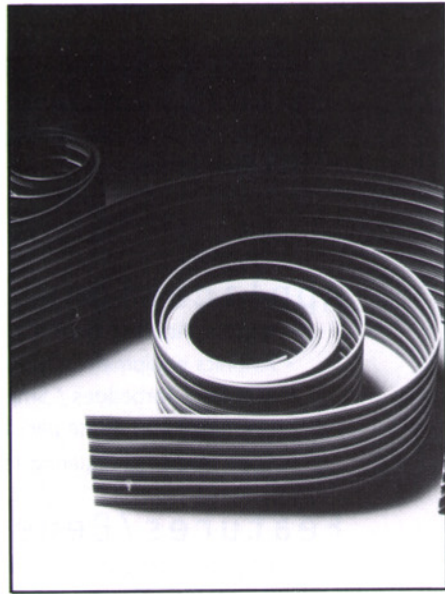

characteristics

Physical


- Conductors: 28 AWG, 7/36 strand, tinned copper
- Number of conductors: 10, 14, 16, 20, 24, 25, 26, 34, 36, 37, 40, 50, 60 and 64
- Color code: Brown, red, orange, yellow, green, blue, violet, gray, white, black (repeat)
- Conductor spacing: .050" ± .005"
- Cable thickness: .042" ± .003"
- Laminate: Clear PVC, self-extinguishing

Electrical

- Voltage rating: 300 V
- Current rating: 1 amp nominal at 10°C above ambient
- Temperature rating: 80°C standard, 105°C consult factory
- Impedance: 105 ohms nominal
- Capacitance: 13.0 pf/ft. (42,7 pf/m) nominal @ 1MHz
- Crosstalk: 10' sample, 5 ns rise time with 2 lines driven. NE = 4.7%, FE = 4.3% nominal
- Propagation delay: 1.5 ns/ft. (4.9 ns/m) nominal.
- Insulation resistance: 10¹⁰ ohms — 10 ft. (3 m) min.
- UL style number: Component wire style 1061. Cable style 2697 (80°C) standard. For Cable style 20130 (105°C) consult factory.
- CSA: Cable may be certified under Canadian Standards Association (CSA) Appliance Wiring Material Program (Specify at time of order). CSA AWM I A80°C, 300 V, FT-1.

other cables in series

- Conductors: 12 through 30 AWG solid, stranded, tinned overcoat, top coated, tinned, bare
- Conductor spacing: .050", .085", .100", .125", .156"

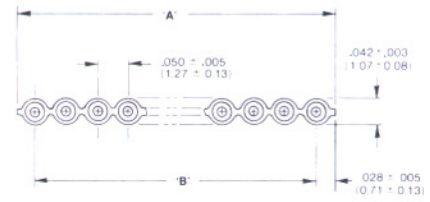

28 AWG SHOWN

Other Capabilities

| Part Number | AWG-Strand | Center line |
|------------------|------------|-------------|
| 843-135-2610-XXX | 26-7/34 | .050" |
| 843-135-2601-XXX | 26-7/34 | .085" |
| 843-135-2401-XXX | 24-7/32 | .085" |
| 843-135-2602-XXX | 26-7/34 | .100" |
| 843-135-2402-XXX | 24-7/32 | .100" |
| 843-135-2603-XXX | 26-7/34 | .125" |
| 843-135-2604-XXX | 26-7/34 | .156" |
| 843-135-2403-XXX | 24-7/32 | .156" |
| 843-136-2201-XXX | 22-7/30 | .156" |

*843-136-XXXX-XXX use a 10 mil film.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9