

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 507)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: BRASS
GOLD OVER NICKEL

-ACCESSORIES: STEEL FOR BRACKETS
Cadmium plated, yellow passivation

-SHELLS: STEEL
Cadmium plated, yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A (SIGNAL CONTACT)

-CONTACT RESISTANCE: ≤ 7.3 m Ohms(SIGNAL)

-CONTACT/CONTACT : ≥ 1000 V

-CONTACT/GROUND : ≥ 1200 V

-INSULATION RESISTANCE: ≥ 5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/21

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 56 DAYS

SALT SPRAY 48 HOURS

Series

DBML13W3P500MN

Shell size: **E A B C D**
(see sheet 3)

M :Characteristics
for the DM serie

Front accessory definition
(see sheet 2)

blank :without accessory

L :threaded insert M3

O :threaded insert UNC 4-40

V :female screw UNC 4-40

Layout of contacts (see sheet 3)

Contacts

P :Pin

Termination type

5 Right angle/Europe standard

Plating

00 Right angle 500 matings/unmatings

43 Right angle 500 matings/unmatings
for harsh environment


PCB accessories definition(see sheet 2)

blank :Plastic brackets

C :Without brackets


M :Metal brackets

N :Obligatory indication for HE 507

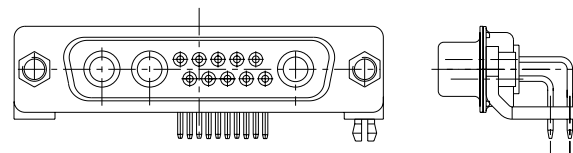

13W3 FOR EXAMPLE

www.fciconnect.com				surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
				TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	M. PESSON	2006/11/14	ANGULAR	0.X	± 0.3	size	A2	Scale	2:1	
Eng	M. PESSON	2006/11/14	LINEAR	0.XX	± 0.1	ECN	LS06-0174			
Chr	P. LEGARE	2006/11/14	$0^\circ \pm 2^\circ$	0.XXX	± 0.05	Product family	-	Spec. ref		
Appr	P. LEGARE	2006/11/14								
SUB MALE DMW EUROPE foot print				mixed power right angled solder				Rev.	A	
catalog no				CUSTOMER				sheet 1 of 9		

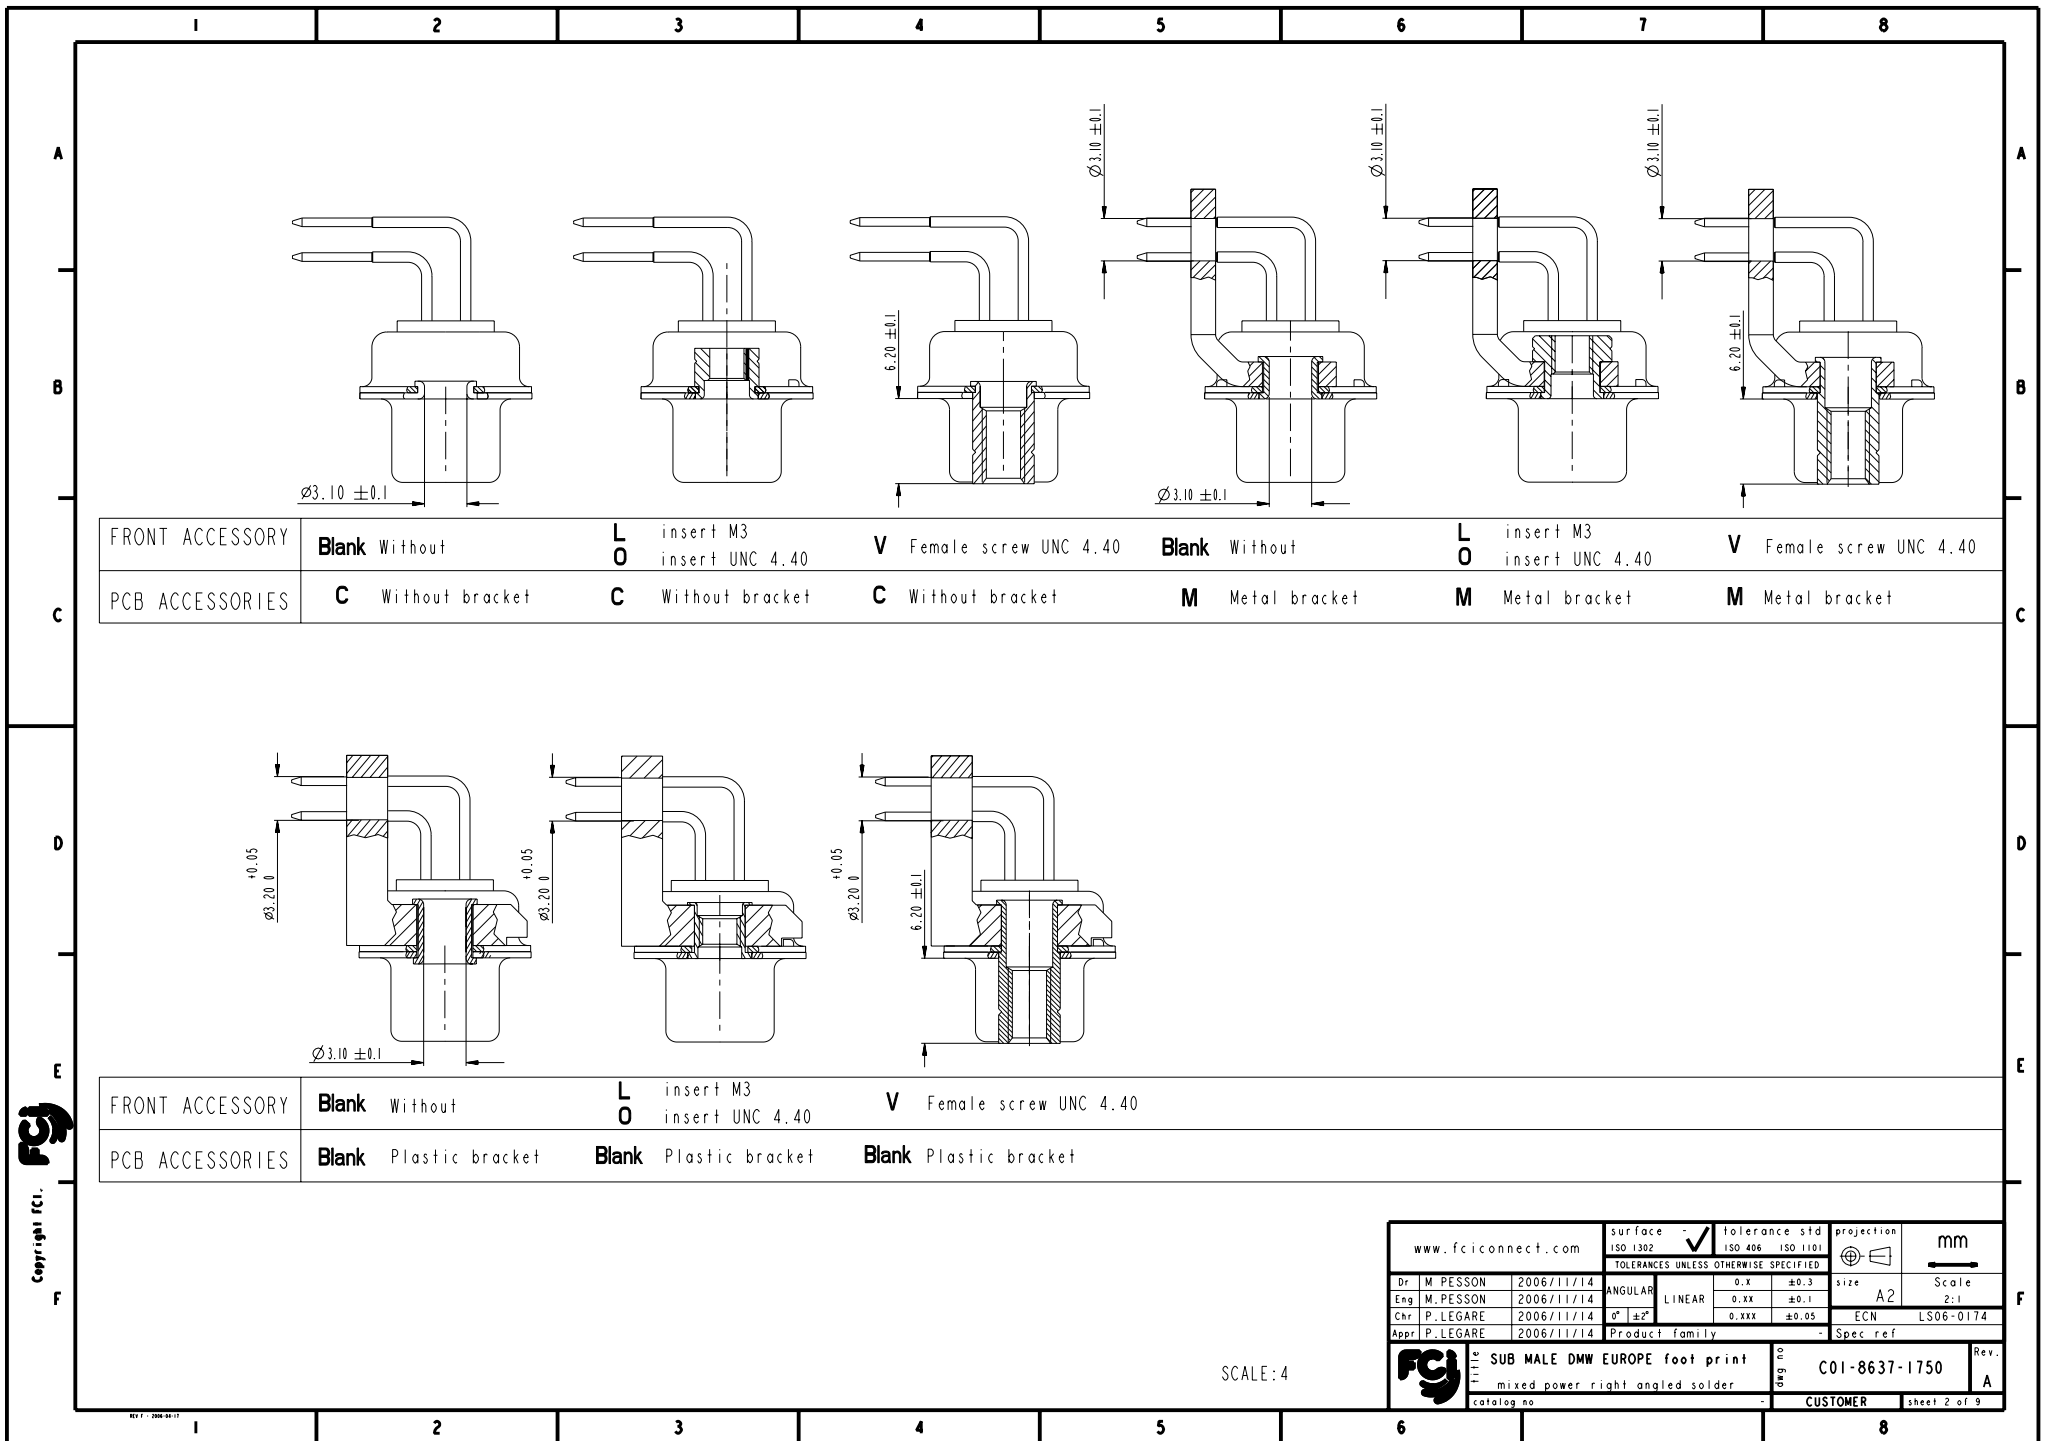

shell size
i xWx


LAYOUTS


PART NUMBER	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES
D*MxWxP500CN	500	without	without
D*MLxWxP500CN	500	insert M3	without
D*MOxWxP500CN	500	insert UNC 4.40	without
D*MVxWxP500CN	500	female screw UNC 4.40	without
D*MxWxP500MN	500	without	metal bracket
D*MLxWxP500MN	500	insert M3	metal bracket
D*MOxWxP500MN	500	insert UNC 4.40	metal bracket
D*MVxWxP500MN	500	female screw UNC 4.40	metal bracket
D*MxWxP500N	500	without	plastic bracket
D*MLxWxP500N	500	insert M3	plastic bracket
D*MOxWxP500N	500	insert UNC 4.40	plastic bracket
D*MVxWxP500N	500	female screw UNC 4.40	plastic bracket

PART NUMBER	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES
D*MxWxP543CN	500	without	without
D*MLxWxP543CN	500	insert M3	without
D*MOxWxP543CN	500	insert UNC 4.40	without
D*MVxWxP543CN	500	female screw UNC 4.40	without
D*MxWxP543MN	500	without	metal bracket
D*MLxWxP543MN	500	insert M3	metal bracket
D*MOxWxP543MN	500	insert UNC 4.40	metal bracket
D*MVxWxP543MN	500	female screw UNC 4.40	metal bracket
D*MxWxP543N	500	without	plastic bracket
D*MLxWxP543N	500	insert M3	plastic bracket
D*MOxWxP543N	500	insert UNC 4.40	plastic bracket
D*MVxWxP543N	500	female screw UNC 4.40	plastic bracket

E 5W1
A 11W1
A 7W2
B 21W1
B 17W2
B 13W3
B 9W4
C 25W3
C 21WA4
C 27W2
D 47W1
D 24W7
D 36W4

www.fciconnect.com		surface - ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	M. PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	A2
Eng	M. PESSON	2006/11/14	LINEAR	0.XX	±0.1	Scale	2:1
Chr	P. LEGARE	2006/11/14	0° ±2°	0.XXX	±0.05	ECN	LS06-0174
Appr	P. LEGARE	2006/11/14	Product family		Spec ref		
FCI		SUB MALE DMW EUROPE foot print		deg no		C01-8637-1750	
		mixed power right angled solder		catalog no		CUSTOMER	
						sheet 3 of 9	

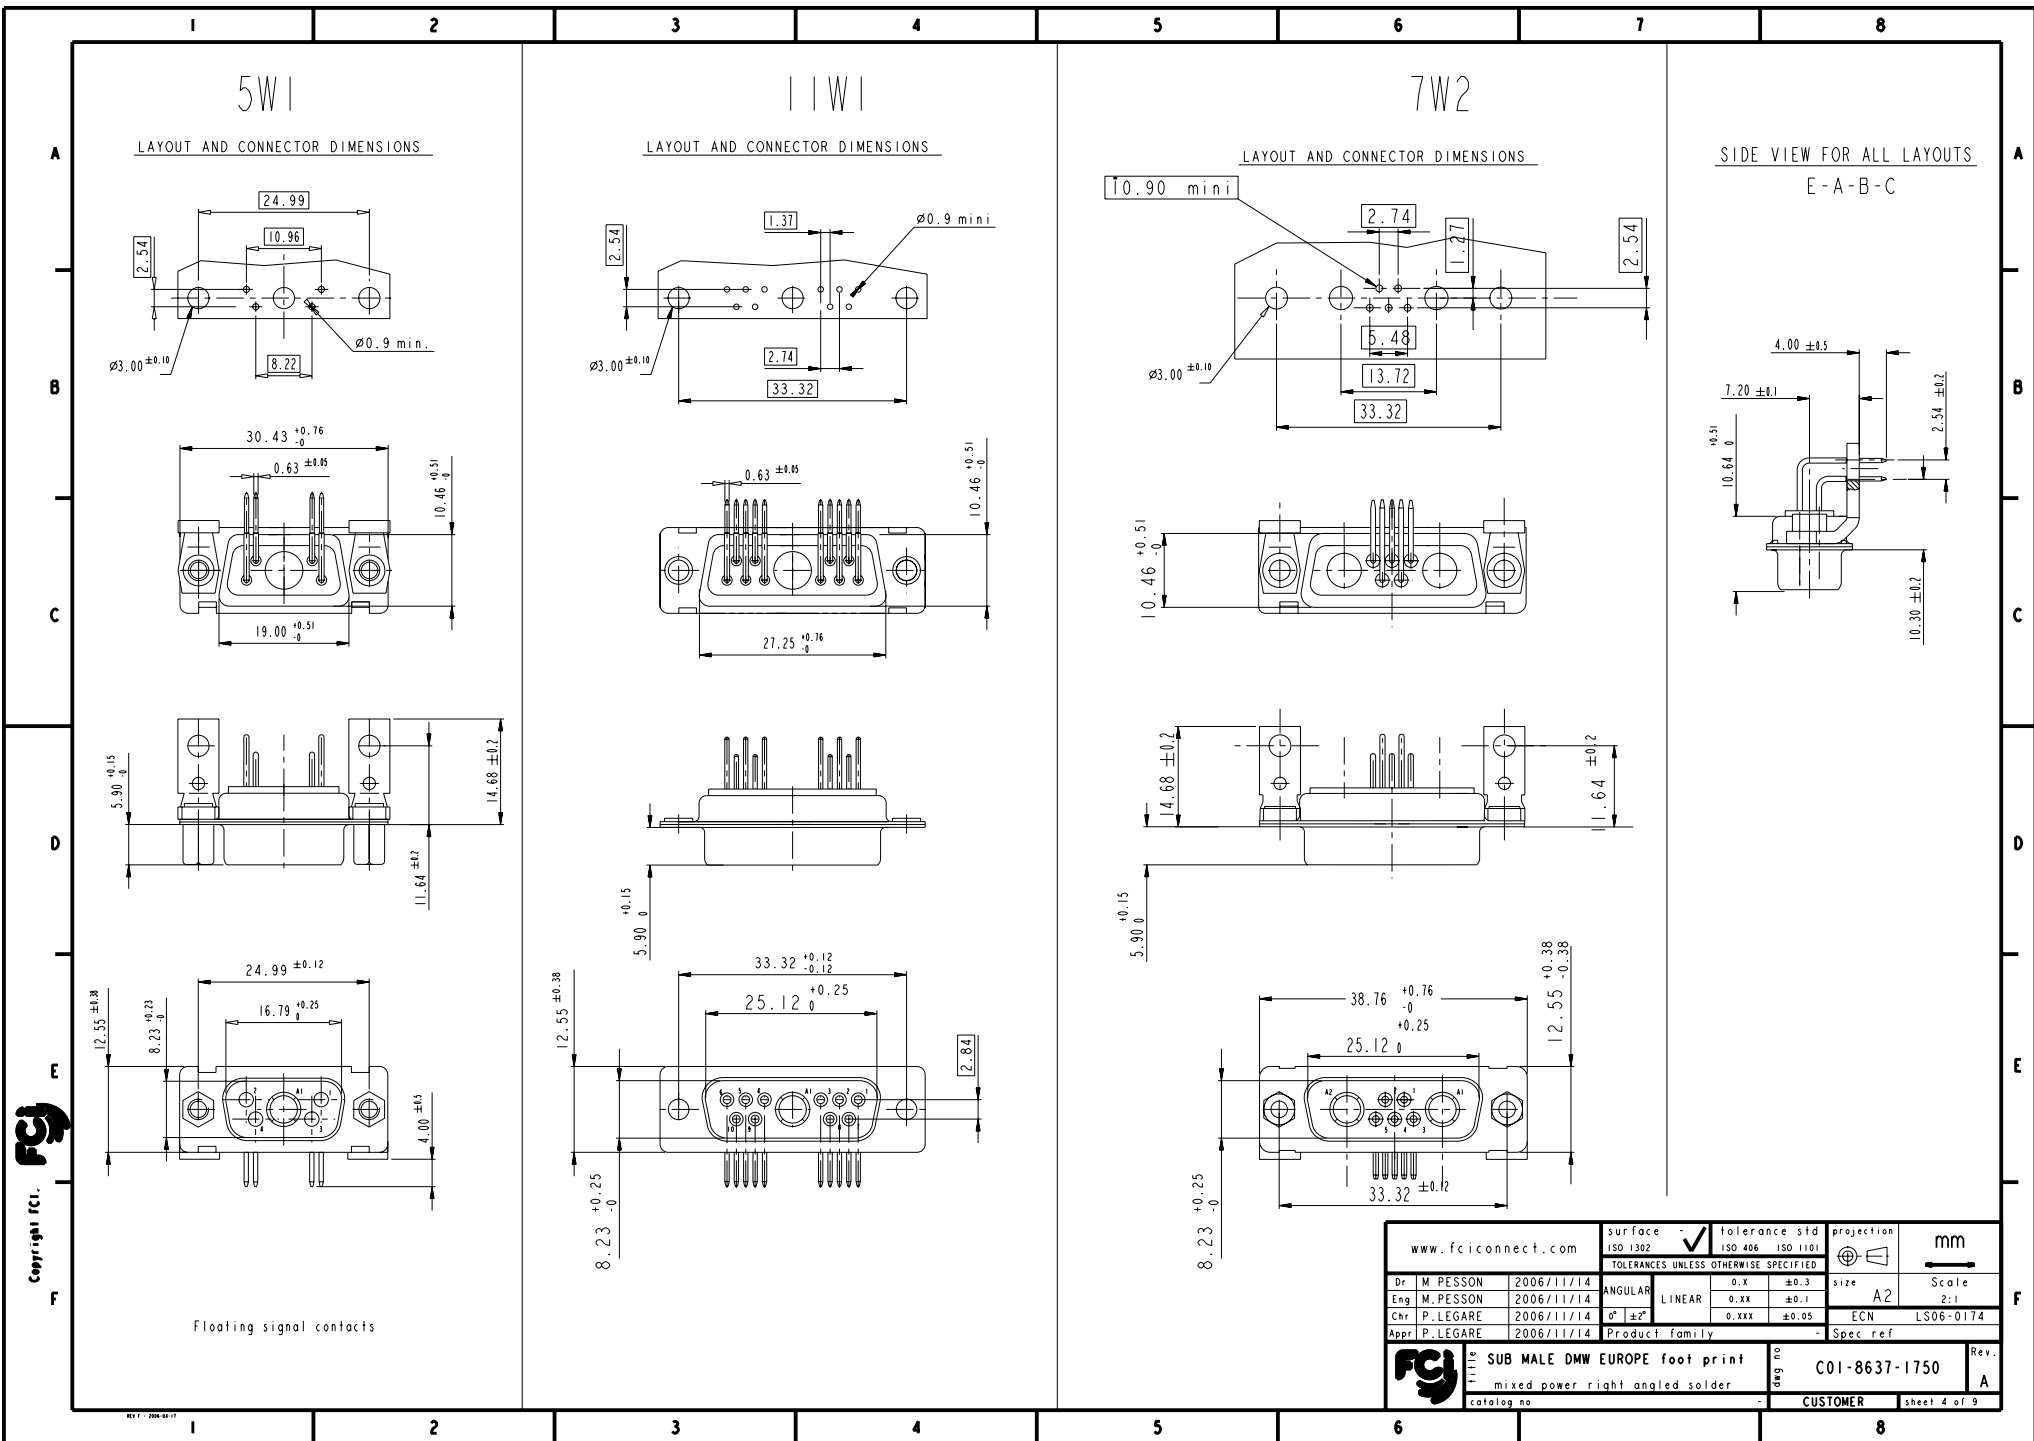


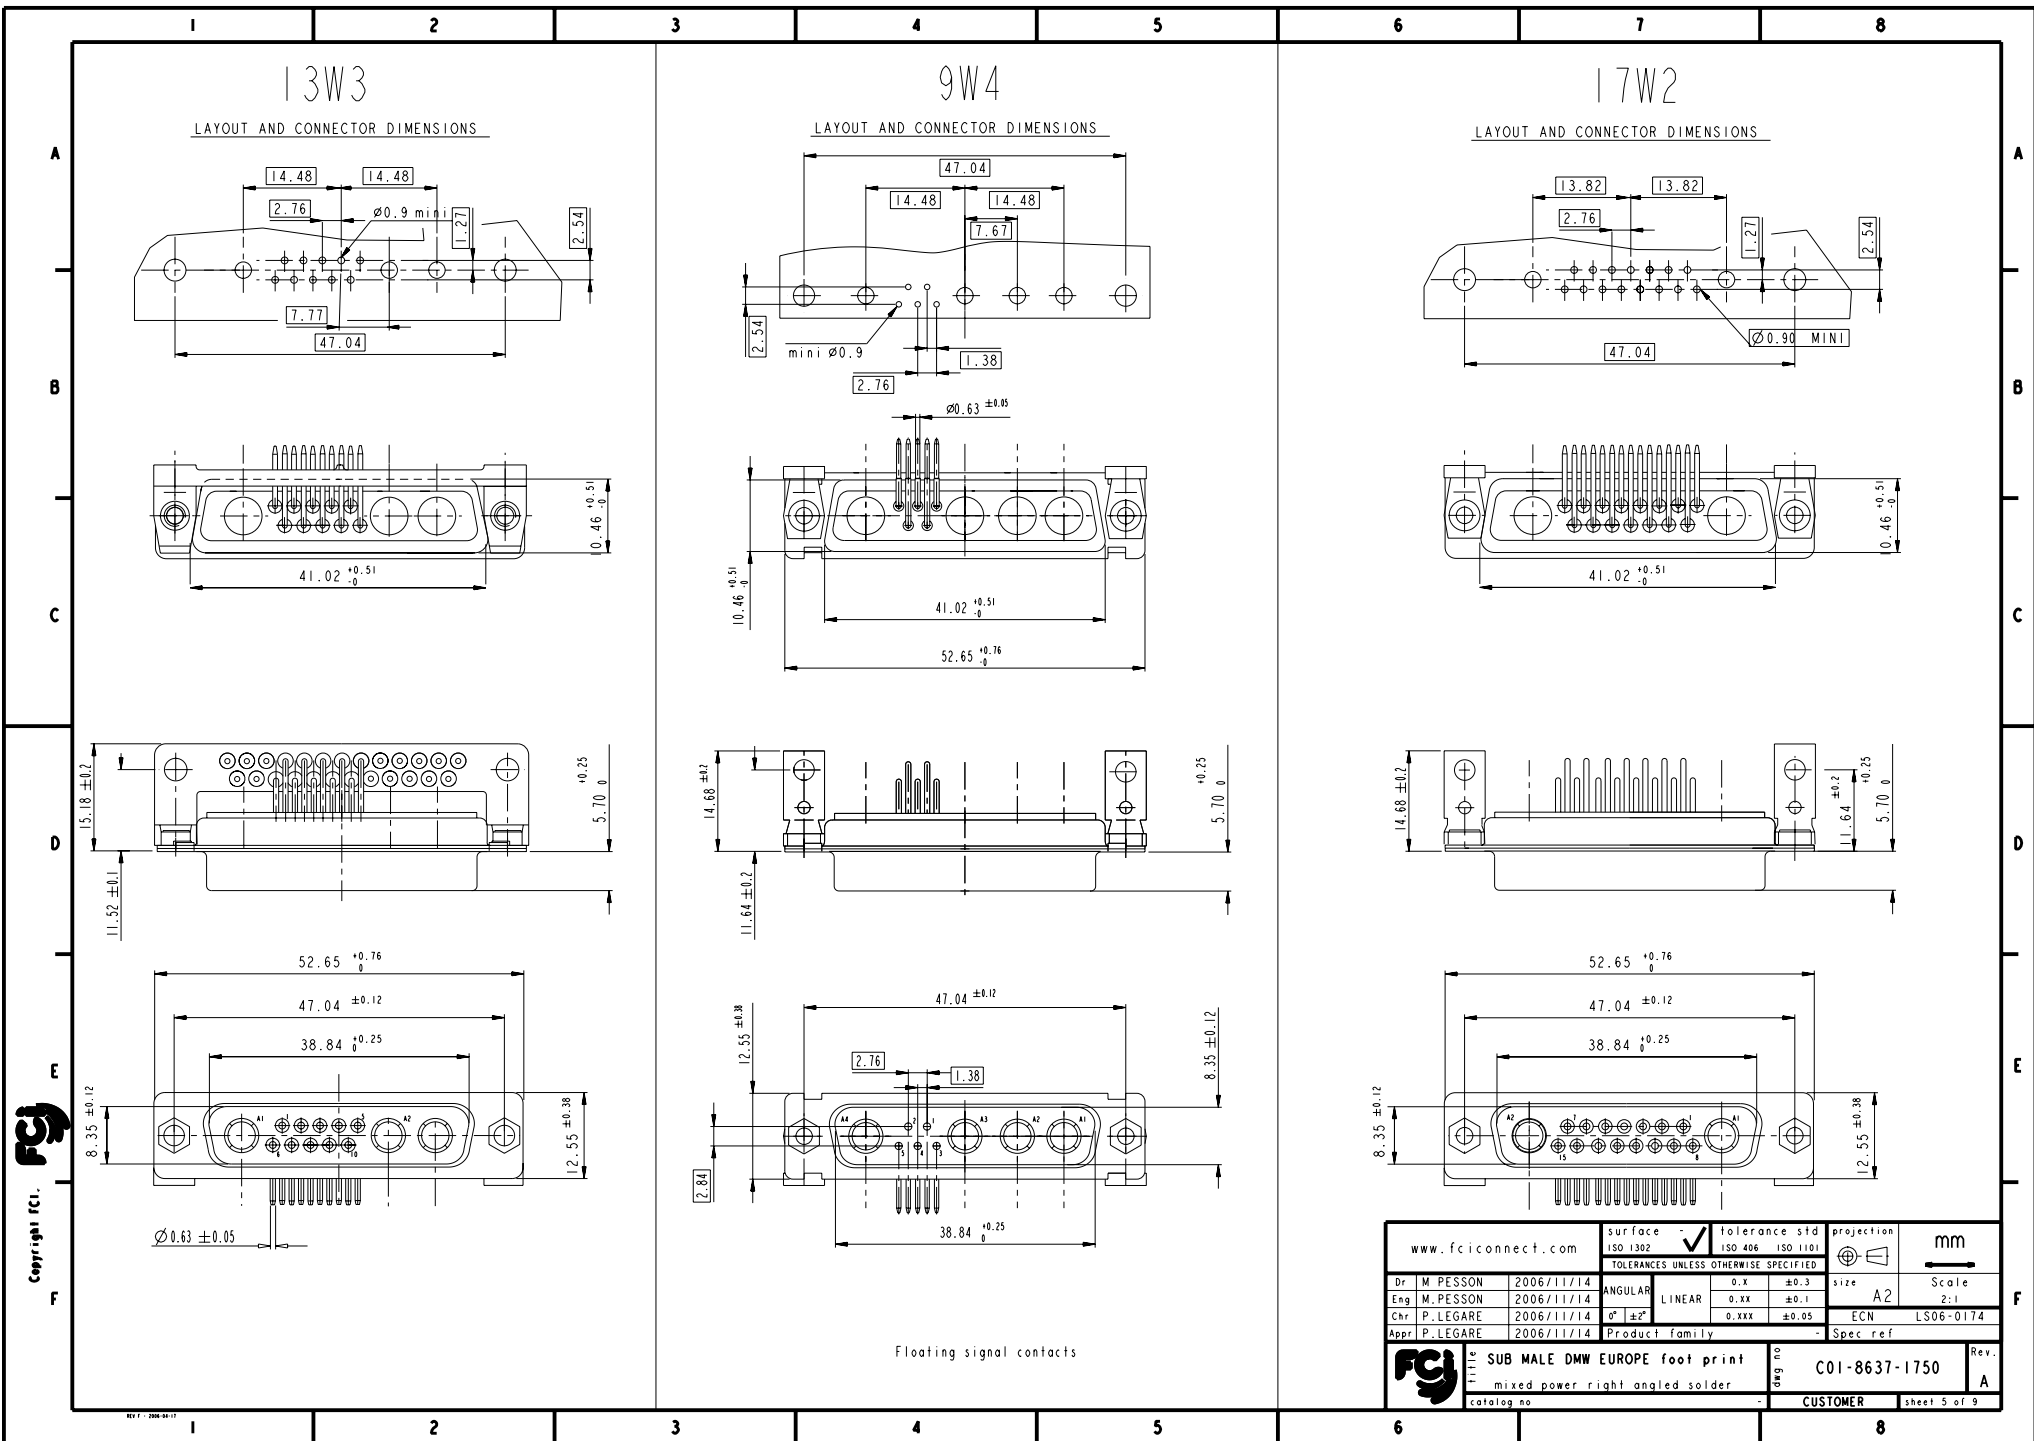

LAYOUT AND CONNECTOR DIMENSIONS







LAYOUT AND CONNECTOR DIMENSIONS

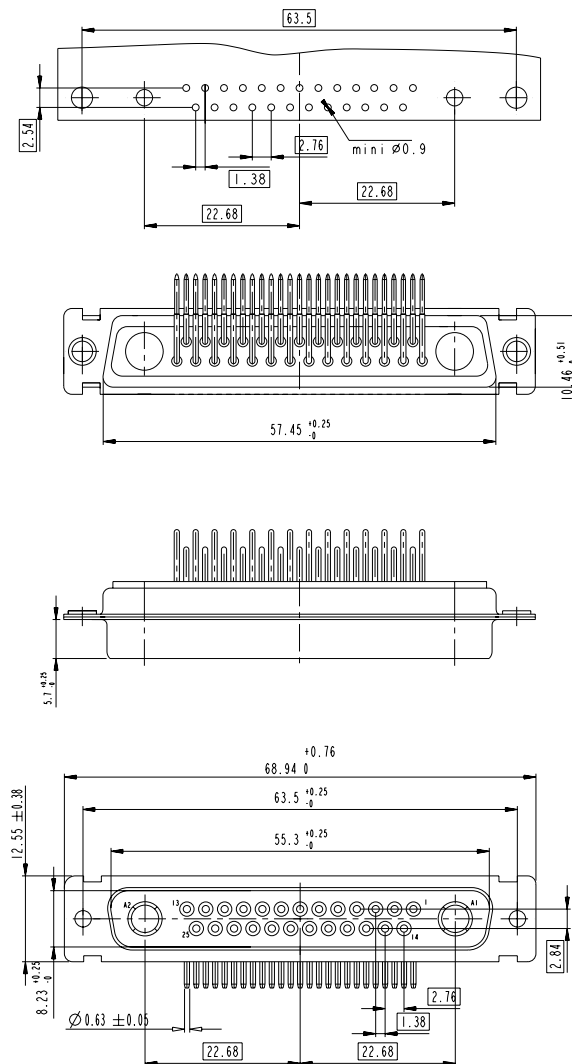

www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 5101		projection 	mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M.PESSON	2006/11/14	ANGULAR	LINEAR	0.X ±0.3	size	Scale
Eng	M.PESSON	2006/11/14			0.XX ±0.1	A2	2:1
Chr	P.LEGARE	2006/11/14			0° ±2°	0.XXX ±0.05	ECN
Appr	P.LEGARE	2006/11/14	Product family			- Spec ref	
			SUB MALE DMW EUROPE foot print mixed power right angled solder			C01-8637-1750	Rev. A
catalog no			CUSTOMER			sheet 6 of 9	





21WA4

LAYOUT AND CONNECTOR DIMENSIONS

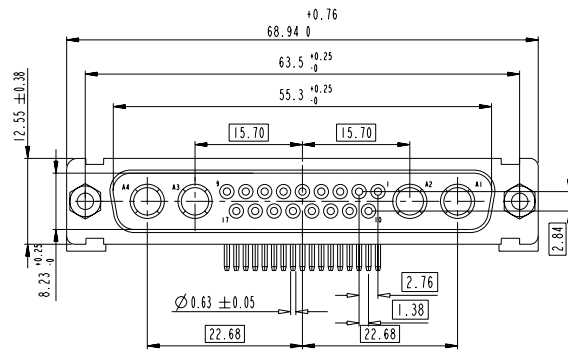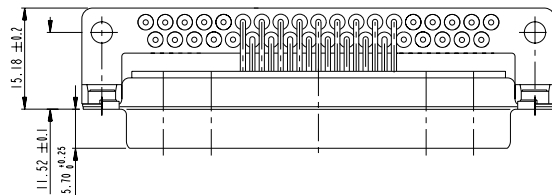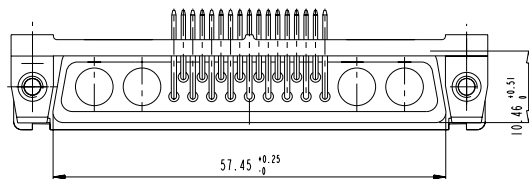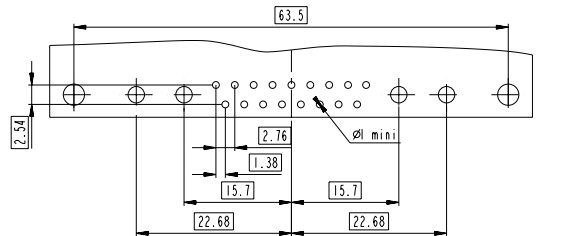



25W3

LAYOUT AND CONNECTOR DIMENSIONS

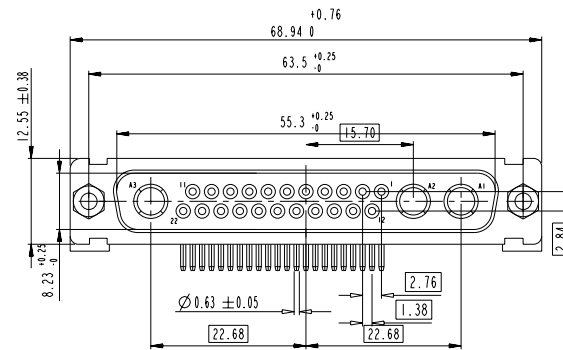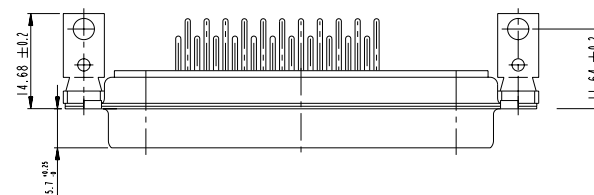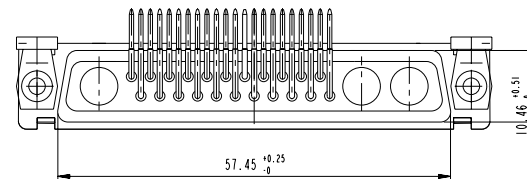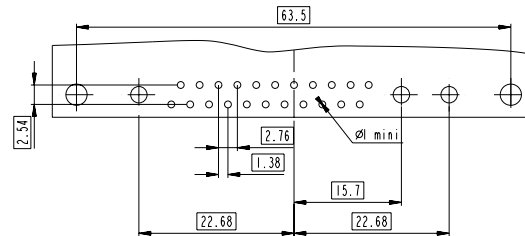



www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M. PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1
Eng	M. PESSON	2006/11/14			0.XX	±0.1		
Chr	P. LEGARE	2006/11/14	0° ±2°		0.XXX	±0.05	ECN	LS06-0174
Appr	P. LEGARE	2006/11/14	Product family				- Spec ref	
			Title SUB MALE DMW EUROPE foot print				Rev. A	
			mixed power right angled solder					
catalog no			-		CUSTOMER		sheet 7 of 9	

LAYOUT AND CONNECTOR DIMENSIONS



LAYOUT AND CONNECTOR DIMENSIONS



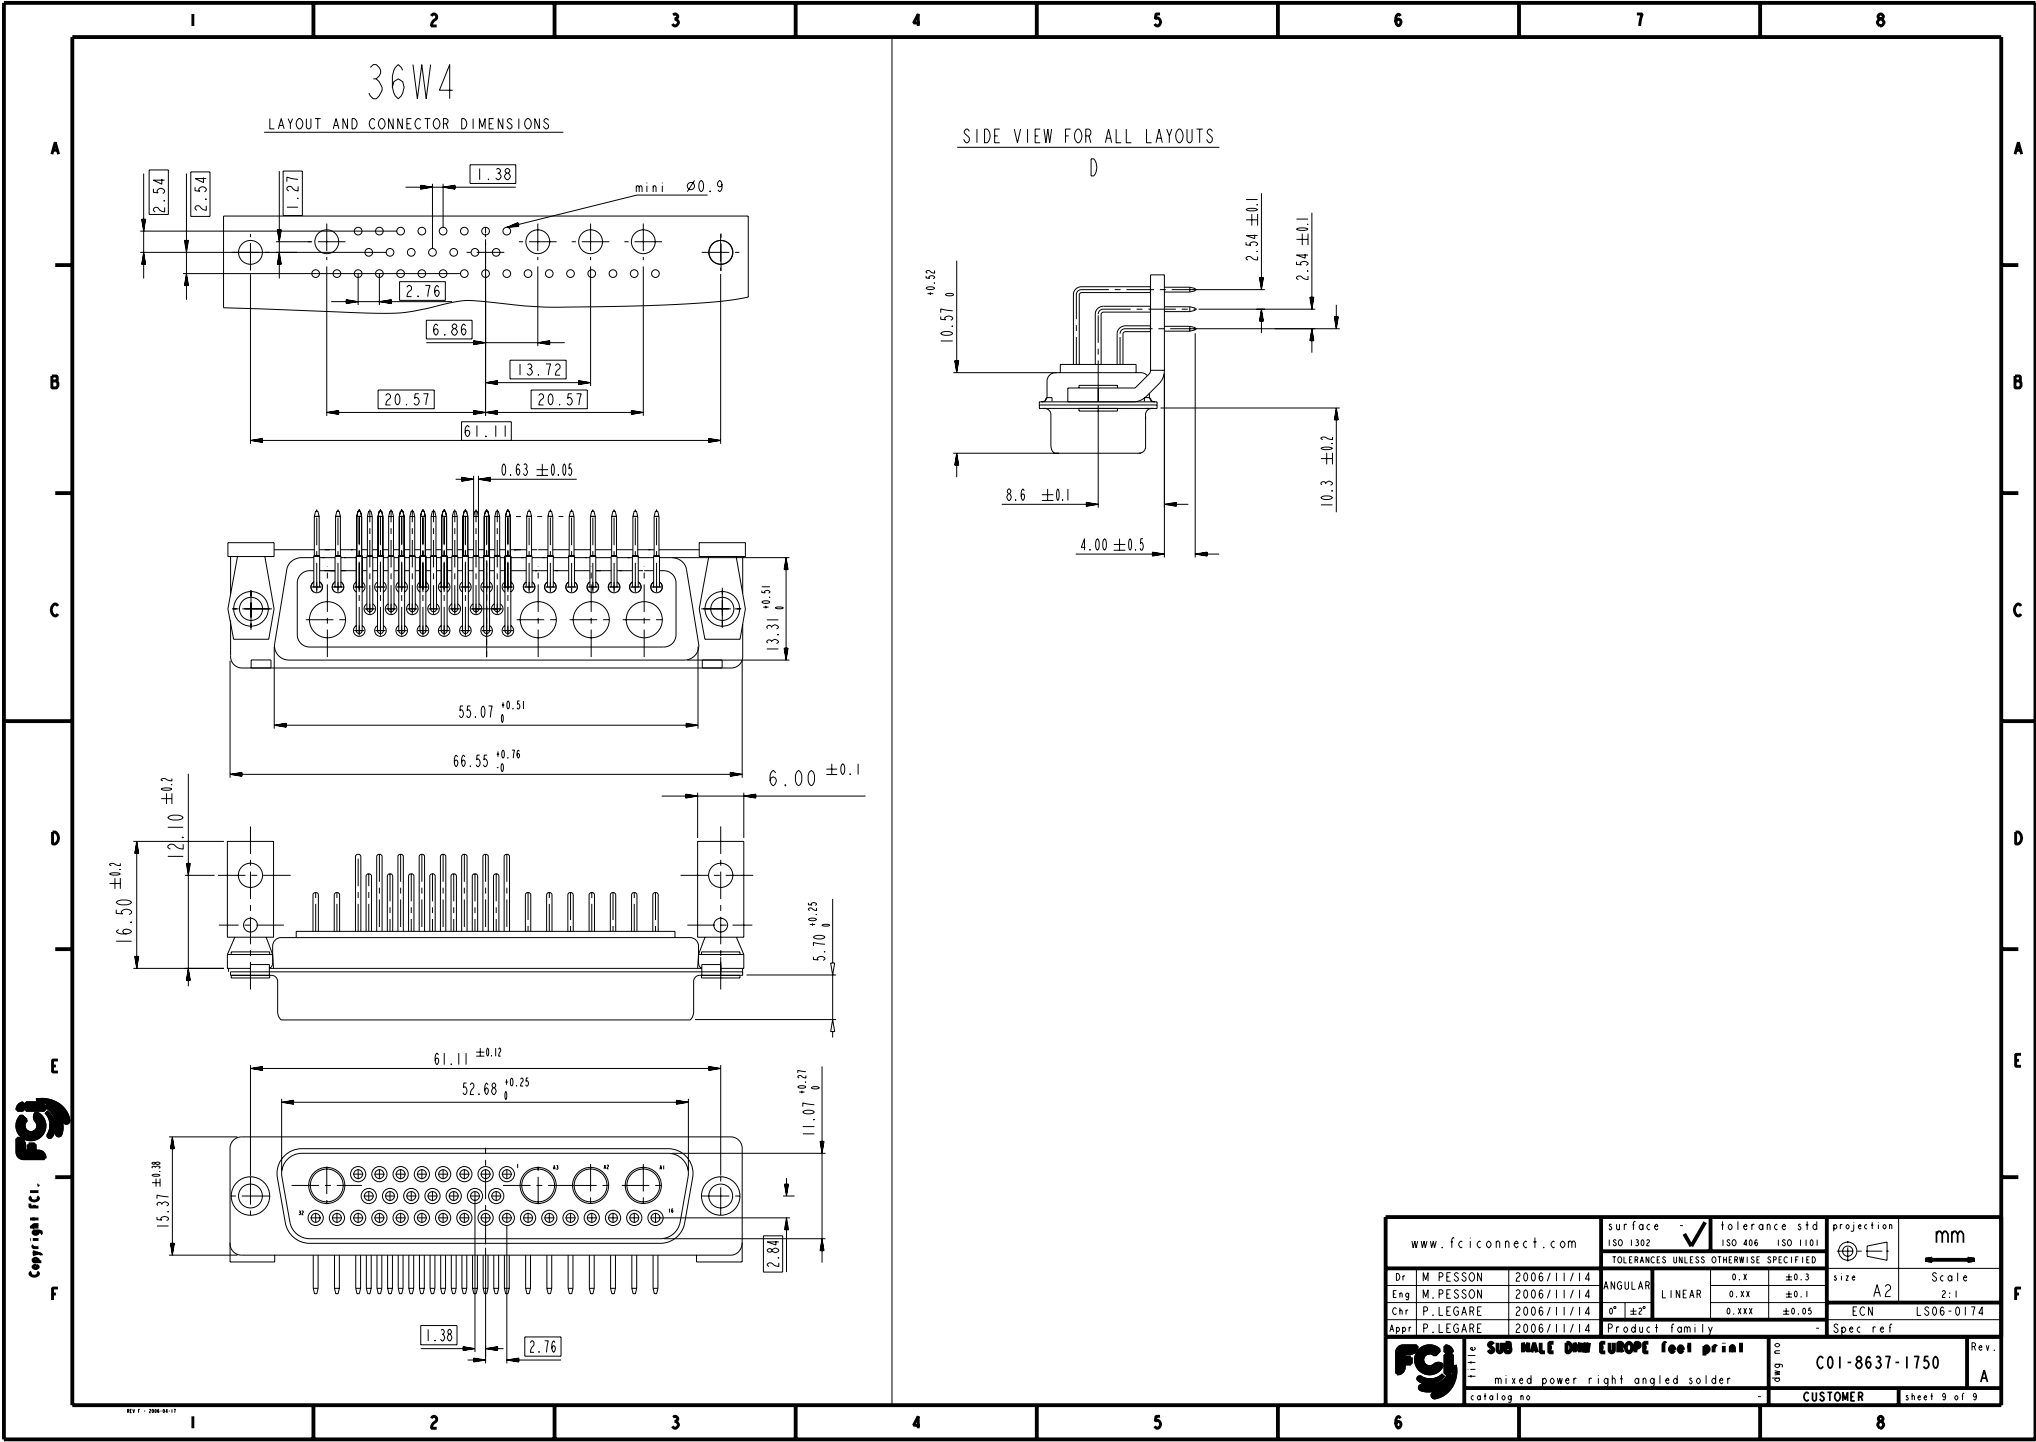

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9