
LH1502BAC, LH1502BACTR, LH1502BB

Vishay Semiconductors

Dual 1 Form A/B, C Solid State Relay

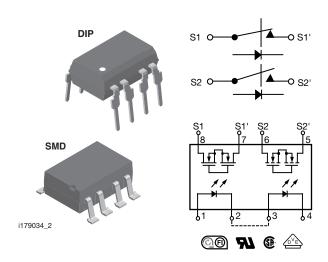

DESCRIPTION

The LH1502 relays contain normally open and normally closed switches that can be used independently as a 1 form A and 1 form B relay, or when used together, as a 1 form C relay. The relays are constructed as a multi-chip hybrid device. Actuation control is via an infrared LED. The output switch is a combination of a photodiode array with MOSFET switches and control circuity.

FEATURES

- · Current limit protection
- Isolation test voltage 3750 V_{RMS}
- Typical R_{ON} 20 Ω
- Load voltage 350 V
- Load current 150 mA
- · High surge capability
- · Clean bounce free switching
- Low power consumption
- SMD lead available on tape and reel
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

APPLICATIONS

- · General telecom switching
 - On/off hook control
 - Ring delay
- Dial pulse
- Ground start
- Ground fault protection
- Instrumentation
- · Industrial controls

AGENCY APPROVALS


UL1577: file no. E52744 system code H, double protection

CSA: certification 093751

DIN EN: 60747-5-2 (VDE 0884)/60747-5-5 (pending),

available with option 1

FIMKO: 25419

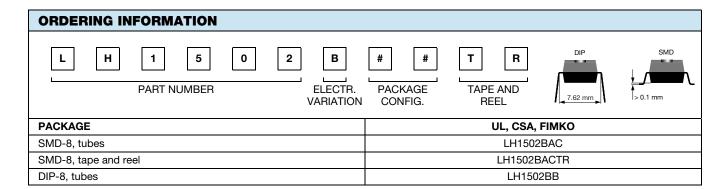

LH1502BAC, LH1502BACTR, LH1502BB

Vishay Semiconductors

ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified)							
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT			
INPUT							
LED continuous forward current		I _F	50	mA			
LED reverse voltage	I _R ≤ 10 μA	V _R	8	V			
OUTPUT							
DC or peak AC load voltage	$I_L \le 50 \ \mu A$	V_L	350	V			
Continuous DC load current (form C operation)		ال	150	mA			
Peak load current, form A	t = 100 ms	lР	(3)				
Peak load current (single shot), form B		l _P	350	mA			
SSR							
Ambient operating temperature range		T _{amb}	- 40 to + 85	°C			
Storage temperature range		T _{stg}	- 40 to + 125	°C			
Pin soldering temperature (1)	t = 10 s max.	T _{sld}	260	°C			
Input to output isolation test voltage	$t = 1 \text{ s}, I_{ISO} = 10 \mu\text{A max}.$	V _{ISO}	3750	V _{RMS}			
Pole-to-pole isolation voltage (S1 to S2) (2), (dry air, dust free, at sea level)			1600	V			
Output power dissipation (continuous)		P _{diss}	600	mW			

Notes

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not
 implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute
 maximum ratings for extended periods of the time can adversely affect reliability.
- (1) Refer to reflow profile for soldering conditions for surface mounted devices (SMD). Refer to wave profile for soldering conditions for through hole devices (DIP).
- (2) Breakdown occurs between the output pins external to the package.
- (3) Refer to current limit performance application note for a discussion on relay operation during transient currents.

ELECTRICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)								
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT		
INPUT								
LED forward current, switch turn-on (NO)	$I_L = 100 \text{ mA}, t = 10 \text{ ms}$	I _{Fon}		0.6	2	mA		
LED forward current, switch turn-off (NO)	$V_{L} = \pm 300 \text{ V}$	I _{Foff}	0.4	0.5		mA		
LED forward current, switch turn-on (NC)	$I_L = 300 \text{ mA}, t = 10 \text{ ms}$	I _{Fon}	0.2	0.9		mA		
LED forward current, switch turn-off (NC)	$V_{L} = \pm \ 300 \ V$	I _{Foff}		1	2	mA		
LED forward voltage	I _F = 10 mA	V_{F}	1.15	1.26	1.45	V		
OUTPUT								
On-resistance (NO, NC)	$I_F = 5 \text{ mA (NO)}, I_F = 0 \text{ mA (NC)},$ $I_L = 50 \text{ mA (NC)}$	R _{ON}	12	20	25	Ω		
Off-resistance (NO)	$I_F = 0 \text{ mA}, V_L = \pm 100 \text{ V}$	R _{OFF}	0.35	5000		GΩ		
Off-resistance (NC)	$I_F = 5 \text{ mA}, V_L = \pm 100 \text{ V}$	R _{OFF}	0.1	1.4		GΩ		
Current limit (NO)	$I_F = 5$ mA, $t = 5$ ms, $V_L = \pm 5$ V	I _{LMT}	270	290	380	mA		
Off-state leakage current (NO)	$I_F = 0 \text{ mA}, V_L = \pm 100 \text{ V}$	Io		0.02	1000	nA		
Off-state leakage current (NC)	$I_F = 5 \text{ mA}, V_L = \pm 100 \text{ V}$	Io		0.07	1	μΑ		
Off-state leakage current (NO, NC)	$I_F = 0 \text{ mA (NO)}, I_F = 5 \text{ mA (NC)},$ $V_L = \pm 200 \text{ V}$	Io			1	μA		
Output capacitance (NO)	$I_F = 0 \text{ mA}, V_L = 50 \text{ V}$	Co		50		pF		
Output capacitance (NC)	$I_F = 5 \text{ mA}, V_L = 50 \text{ V}$	Co		50		pF		
TRANSFER								
Capacitance (input to output)	V _{ISO} = 1 V	C _{IO}		3		pF		

Note

• Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluation. Typical values are for information only and are not part of the testing requirements.



Vishay Semiconductors

SWITCHING CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
transfer							
Turn-on time (NO)	$I_F = 10 \text{ mA}, I_L = 37.5 \text{ mA}, V_L = 150 \text{ V}$	t _{on}	0.2	3.2	6	ms	
Turn-on time (NC)	$I_F = 10 \text{ mA}, I_L = 37.5 \text{ mA}, V_L = 150 \text{ V}$	t _{on}	0.2	3.8	6	ms	
Turn-off time (NO)	$I_F = 10 \text{ mA}, I_L = 37.5 \text{ mA}, V_L = 150 \text{ V}$	t _{off}		1.6	3	ms	
Turn-off time (NC)	$I_F = 10 \text{ mA}, I_L = 37.5 \text{ mA}, V_L = 150 \text{ V}$	t _{off}		0.8	3	ms	

TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)




Fig. 1 - Recommended Operating Conditions





Fig. 2 - Recommended Operating Conditions




Vishay Semiconductors

PACKAGE DIMENSIONS in millimeters

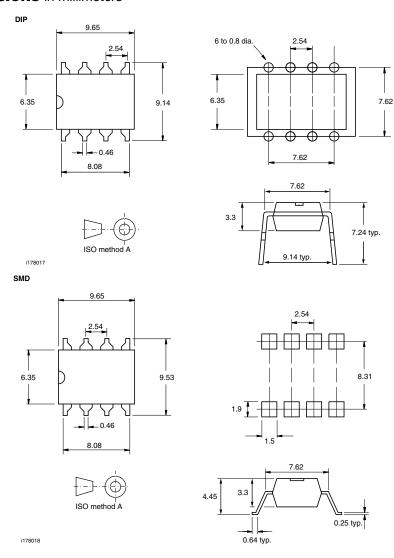

PACKAGE MARKING (example)



Note

• Tape and reel suffix (TR) is not part of the package marking.





Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Revision: 11-Mar-11

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru 4 moschip.ru 9