


# Bulk Metal® Foil Ultra High Technology Precision Trimming Potentiometers, 1 1/4" Rectilinear, RJ12 Style, Designed to Meet or Exceed The Requirements of MIL-PRF-22097, Char. F with Smooth and Unidirectional Output

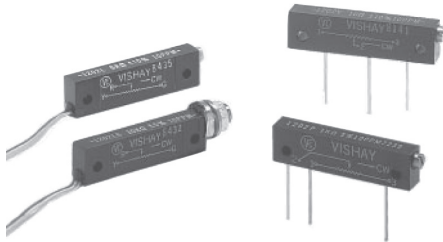

## INTRODUCTION




Vishay Foil precision trimmers have the Bulk Metal® Foil resistive element which possesses a unique inherent temperature and load life stability. Plus, their advanced virtually back lash-free adjustment mechanism makes them easy to set quickly and accurately and keeps the setting exactly on target.

## FEATURES

- Temperature coefficient of resistance (TCR):  $\pm 10$  ppm/°C maximum <sup>(3)</sup> (- 55 °C to + 150 °C ref. at + 25 °C); through the wiper <sup>(4)</sup>;  $\pm 25$  ppm/°C
- A smooth and unidirectional resistance with leadscrew adjustment
- Load life stability: 0.1 % typical  $\Delta R$ , 0.5 % maximum  $\Delta R$  under full rated power at + 85 °C for 2000 h
- Settability: 0.05 % typical; 0.1 % maximum
- Setting stability: 0.1 % typical; 0.5 % maximum,  $\Delta SS$
- Power rating: 0.5 W at + 85 °C
- Resistance range: 2  $\Omega$  to 20 k $\Omega$
- "O"-ring prevents ingress of fluids during any board cleaning operation
- Electrostatic discharge (ESD) up to 25 000 V
- Terminal finish: gold plated (tin/lead finish is available on request)



RoHS\*  
COMPLIANT



MODEL	TERMINATION STYLE	AVERAGE WEIGHT (g)	POWER RATING at + 85 °C AMBIENT	NO. OF TURNS
1202	P-In line PC pins	2.5	0.5 W	25 $\pm$ 2
	Y-staggered PC pins <sup>(1)</sup>	2.5		
	L-flexible wire leads	3.3		
	LB-flexible wire leads with bushings	5.1		

STANDARD RESISTANCE VALUES (in $\Omega$ )	STANDARD TOLERANCES
2, 5, 10	$\pm 10$ % <sup>(2)</sup> , $\pm 20$ %
20, 50, 100, 200, 250, 500, 1K, 2K, 5K, 10K, 20K	5 %, 10 %

### Note

- See Figures 1 and 2

<b>Temperature Coefficient of Resistance (TCR), 50 <math>\Omega</math> and up End-to-end <sup>(3)</sup></b> 2 $\Omega$ , 5 $\Omega$ , 10 $\Omega$ , 20 $\Omega$ Through the wiper <sup>(4)</sup>	$\pm 10$ ppm/°C maximum (- 55 °C to + 25 °C) $\pm 10$ ppm/°C maximum (+ 25 °C to + 150 °C) $\pm 20$ ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C) $\pm 25$ ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C)
<b>Stability</b> Load life at 2000 h, under full rated power of 0.5 W at + 85 °C Load life at 10 000 h, under full rated power of 0.5 W at + 85 °C	0.1 % typical $\Delta R$ ; 0.5 % maximum $\Delta R$ 0.1 % typical $\Delta R$ ; 1.0 % maximum $\Delta R$
<b>Power Rating <sup>(5)</sup></b>	0.5 W at + 85 °C
<b>Settability</b>	0.05 % typical; 0.1 % maximum
<b>Setting Stability</b>	0.1 % typical; 0.5 % maximum
<b>Contact Resistance variation - CRV (noise)</b>	3 $\Omega$ typical; 10 $\Omega$ maximum
<b>Hop-off</b>	0.25 % typical; 1.0 % maximum
<b>High-Frequency Operation</b> Rise time Inductance Capacitance	to 100 MHz 10 ns at 1 k $\Omega$ 0.08 $\mu$ H typical 0.5 pF typical
<b>Operating Temperature Range</b>	- 55 °C to + 150 °C

### Note

- Refer to page 4 for footnotes

\* Pb containing terminations are not RoHS compliant, exemptions may apply


**TABLE 4 - MECHANICAL SPECIFICATIONS**

<b>Adjustment Turns</b>	25 ± 2	<b>Case Material</b>	Glass fortified diallyl-phthalate (DAP); black
<b>Mechanical Stops</b>	Wiper idles - no discontinuity	<b>Shaft Torque</b>	8 oz. in. maximum; 3 oz. in. typical
<b>Internal Terminations</b>	All welded - no flux	<b>Backlash</b>	0.05 % typical

**FIGURE 1 - SCHEMATIC AND DIMENSIONS** in Inches (Millimeters)


**1202P**

(In-Line Pins) <sup>(1)</sup>

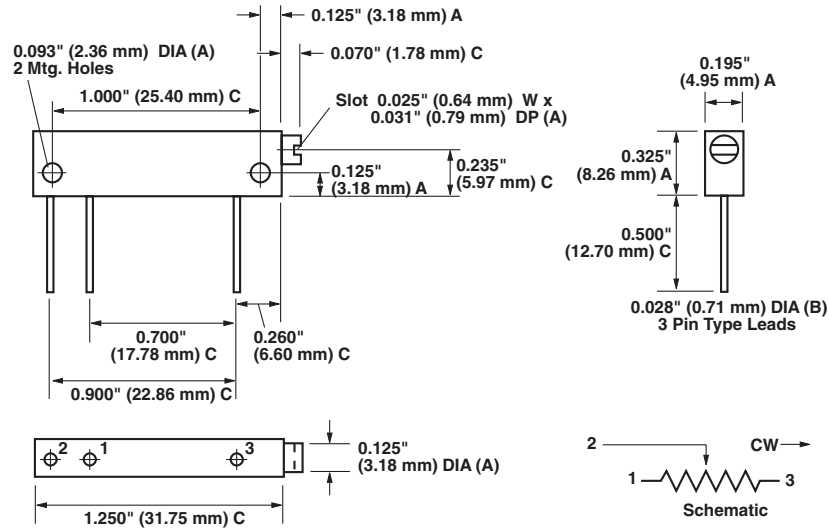

**1202Y**

(Staggered Pins) <sup>(1)</sup>

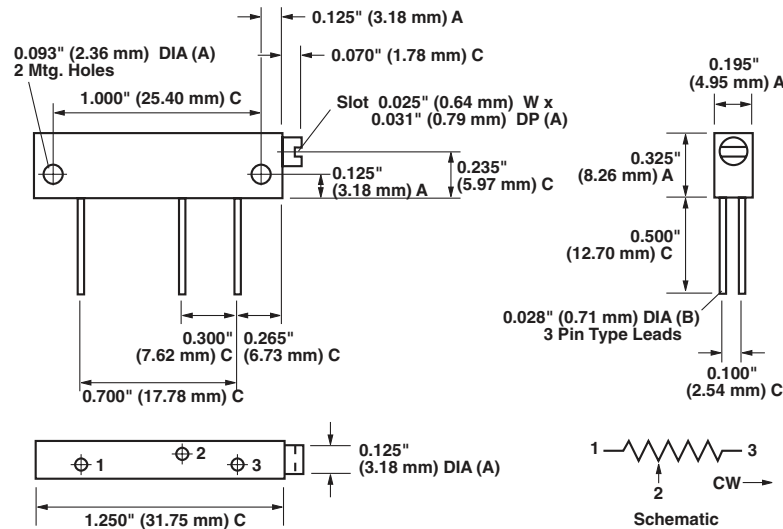


**TOLERANCES:**

- A = ± 0.005" (0.13 mm)
- B = ± 0.003" (0.08 mm)
- C = ± 0.010" (0.25 mm)

**Note**


<sup>(1)</sup> Pin leads are gold plated nickel which are solderable or weldable.

**STANDARD MARKING ILLUSTRATION:**

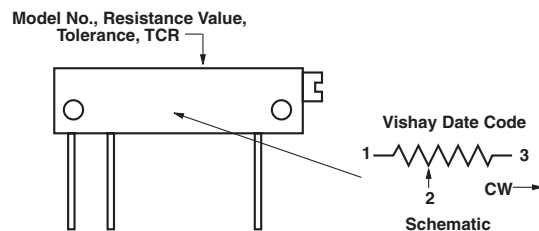


**FIGURE 2 - SCHEMATIC AND DIMENSIONS** in Inches (Millimeters)

**1202L**  
(Flexible Leads)

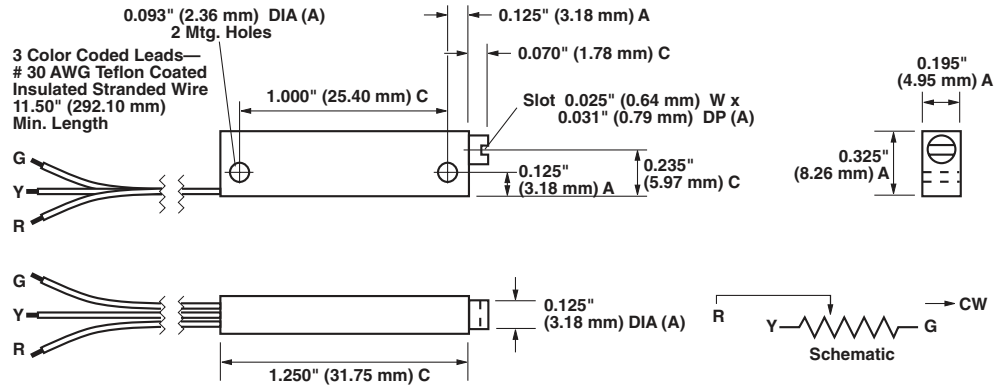


**1202LB**  
(Panel Mounted)

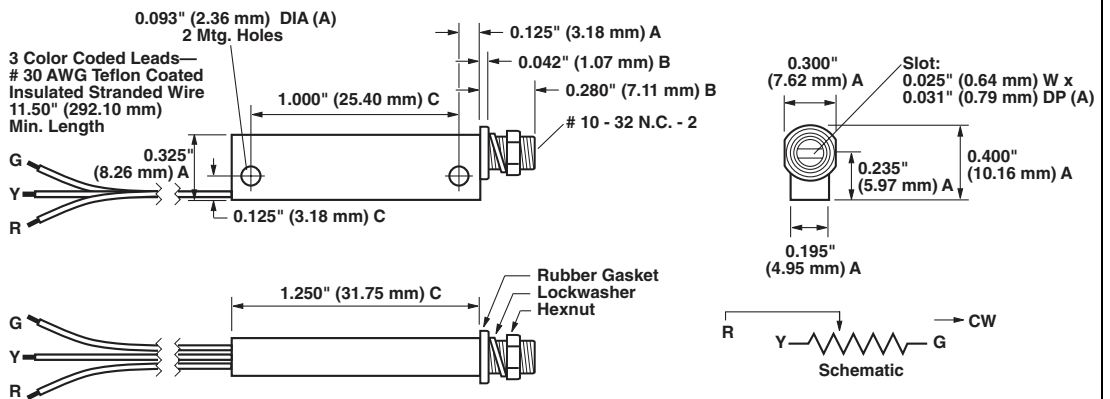

**TOLERANCES:**  
A = ± 0.005" (0.13 mm)  
B = ± 0.003" (0.08 mm)  
C = ± 0.010" (0.25 mm)

Standard marking shown on previous page.

**FIGURE 3 - POWER DERATING CURVE**

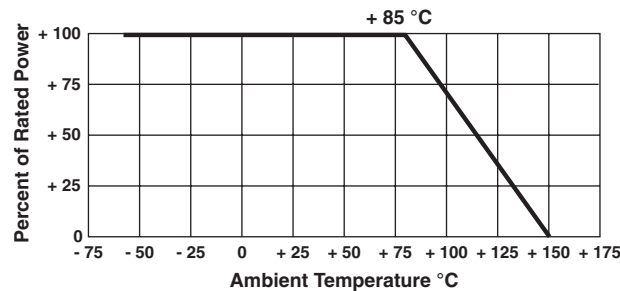

**TABLE 5 - COMPARISON**

	MIL-PRF-22097/2 CHARACTERISTIC F <sup>(7)</sup>	1202 MAXIMUM (Worst Case)
<b>TEST GROUP I</b> Visual and mechanical Total resistance Actual effective electrical travel End resistance Contact resistance variation - CRV (noise) Dielectric withstanding voltage - DWV Per MIL-STD-202, methods 301 and 105 Atmospheric pressure Barometric pressure Insulation resistance Shaft torque Thermal shock	No failures ± 10 % 17 to 27 turns ± 2 % or 20 Ω <sup>(7)</sup> ± 3.0 % or 3 Ω <sup>(7)</sup>  900 V <sub>AC</sub> , 1 min 350 V <sub>AC</sub> , 1 min ≥ 1000 MΩ 8 oz. in. maximum ± 1.0 %	No failures ± 10 % 25 ± 2 turns 2 Ω 3 Ω typical, 10 Ω maximum  900 V <sub>AC</sub> , 1 min 350 V <sub>AC</sub> , 1 min ≥ 1000 MΩ 8 oz. in. maximum ± 1.0 %
<b>TEST GROUP II</b> Resistance temperature characteristic - TCR Moisture resistance Contact resistance variation - CRV (noise)	± 0.01 % (± 100 ppm/°C) ± 1.0 % 3.0 % or 3 Ω <sup>(7)</sup>	± 0.001 % (± 10 ppm/°C) ± 0.5 % 3 Ω typical, 10 Ω maximum
<b>TEST GROUP III</b> Shock (specified pulse) Vibration (high-frequency) Contact resistance variation - CRV (noise) Salt spray	± 1.0 % ± 1.0 % ± 3.0 % or 3 Ω <sup>(7)</sup> No corrosion	± 0.5 % ± 0.5 % 3 Ω typical, 10 Ω maximum No corrosion
<b>TEST GROUP IV</b> Solder heat Life (1000 h at + 85 °C) <sup>(8)</sup> Contact resistance variation - CRV (noise)	± 1.0 % ± 2.0 % ± 3.0 % or 3 Ω <sup>(7)</sup>	± 0.05 % ± 0.5 % 3 Ω typical, 10 Ω maximum
<b>TEST GROUP V</b> Low-temperature operation High-temperature exposure Contact resistance variation - CRV (noise)	± 1.0 % ± 2.0 % ± 3.0 % or 3 Ω <sup>(7)</sup>	± 0.5 % ± 0.5 % 3 Ω typical, 10 Ω maximum
<b>TEST GROUP VI</b> Rotational life Contact resistance variation - CRV (noise) Terminal strength	± 2.0 % ± 3.0 % or 3 Ω <sup>(7)</sup> 2 lbs	± 2.0 % 3 Ω typical, 10 Ω maximum 2 lbs
<b>TEST GROUP VII</b> Solderability (excluding terminations L and LB) Immersion (excluding terminations L and LB)	MIL-STD-202 method 208 No continuous stream of bubbles	MIL-STD-202 method 208 No continuous stream of bubbles
<b>TEST GROUP VIII</b> Fungus	MIL-STD-810 method 508 No mechanical damage	MIL-STD-810 method 508 No mechanical damage

**Notes**

- (1) Preferred termination style for current 1-1/4 inch rectilinear trimmers (staggered PC pins present a sturdier mounting arrangement for shock, vibration, and impact situations).
- (2) 10 Ω at ± 5 % available on special order.
- (3) Maximum TCR applies to the 3 σ (sigma) limit or 99.73 % of a production lot. (Measured end-to-end with wiper off the element.)
- (4) Measurements of TCR through the wiper are influenced more by setting stability and the percentage of the total resistance in use (at the wiper) than by fundamental resistance change due to temperature alone. The parameter shown in Table 3 is a 2 σ distribution typifying the behavior of the device when used with 40 % or more of the total resistance in use.
- (5) Derated linearly from full power at + 85 °C to zero power at + 150 °C. See Figure 3 in this datasheet.
- (6) All ΔR's are measured to the tolerance specified + 0.01 Ω.
- (7) Whichever is greater.
- (8) Load-Life test performed at nominal rated power, 0.5 W, at + 85 °C.

**Special Available Options:**

- Special marking
- Special lengths for lead wires (L, LB Style)
- Hooked leads
- Alternate bushing and PC combinations
- Power conditioning and screening operations

**VISHAY TRIMMERS ARE INSPECTED**


100 % for:

- Immersion
- Resistance tolerance check
- End resistance
- Visual-mechanical
- Dynamic tests for continuity, CRV

By sample for:

- TCR
- DWV

Circuit A is a conventional circuit employing a high value wire wound trimmer (4) linearized by two padding resistors (1 and 2) for the purpose of trimming resistor (3) to within less than 100 ppm absolute resistance.

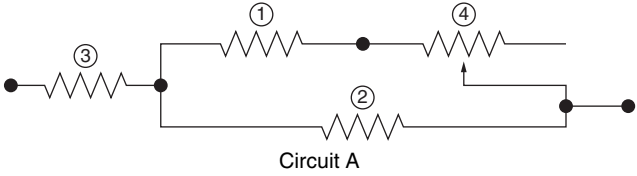

Circuit B uses only a low value infinite resolution Vishay trimming potentiometer (5) to accomplish the same results. Saving in cost and board space is achieved. A low value wire wound trimmer cannot be used because of poor resolution.

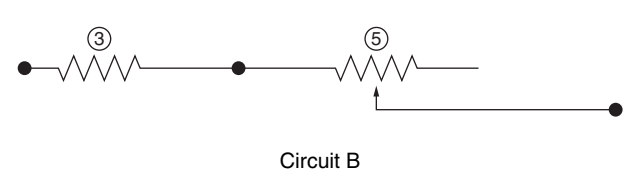


TABLE 6 - GLOBAL PART NUMBER INFORMATION														
NEW GLOBAL PART NUMBER: Y5050500R000K0L (preferred part number format)														
DENOTES PRECISION		VALUE				CHARACTERISTICS <sup>(1)</sup>								
Y		R = Ω K = kΩ				0 = gold plated termination (lead (Pb)-free) 1 to 999 = custom								
Y	5	0	5	0	5	0	0	R	0	0	0	K	0	L
PRODUCT CODE					TOLERANCE			PACKAGING						
5050 = 1202L 0050 = 1202LB 0051 = 1202P 6050 = 1202PB 5051 = 1202Y 7050 = 1202YB					J = ± 5 % K = ± 10 % M = ± 20 %			L = foam/box pack						
FOR EXAMPLE: ABOVE GLOBAL ORDER Y5050 500R000 K 0 L:														
TYPE: 1202L VALUE: 500.0 Ω ABSOLUTE TOLERANCE: ± 10.0 % TERMINATION: gold plated (lead (Pb)-free) PACKAGING: foam/box pack														
HISTORICAL PART NUMBER: 1202L 500R00 K B (will continue to be used)														
1202L		500R00			K			B						
MODEL		RESISTANCE VALUE			TOLERANCE			PACKAGING						
1202L 1202LB 1202P 1202PB 1202Y 1202YB		500.0 Ω			J = ± 5 % K = ± 10 % M = ± 20 %			B = bulk pack						

**Note**  
<sup>(1)</sup> For non-standard requests, please contact application engineering.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9