

## Series PVA30NPbF

Microelectronic Power IC  
HEXFET® Power MOSFET Photovoltaic Relay  
Single-Pole, Normally-Open  
0-300V AC/DC, 50mA

### General Description

The PVA30 Series AC Relay (PVA) is a single-pole, normally open, solid-state replacement for electromechanical relays used for general purpose switching of analog signals. It utilizes International Rectifier's HEXFET power MOSFETs as the output switches, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED), which is optically isolated from the photovoltaic generator.

The PVA30 Series combines very low solid-state output capacitance, very high off-state resistance and very fast response times. These Photovoltaic Relays are designed specifically to accurately switch low-level signals in high-performance instrumentation systems.


The PVA30 Series overcomes the limitations of both conventional electromechanical and reed relays by offering the solid state advantages of long life, fast operating speed, low pick up power, bounce-free operation, low thermal offset voltages and miniature package. These advantages allow product improvement and design innovations in many applications such as process control, multiplexing, automatic test equipment and data acquisition.

The PVA30 can switch analog signals from thermocouple level to 300 Volts peak AC or DC polarity. Signal frequencies into the RF range are easily controlled and switching rates up to 1.7kHz are achievable. The extremely small thermally generated offset voltages allow increased measurement accuracies.

These relays are packaged in 8-pin, molded DIP packages and available with either thru-hole or surface-mount ("gull-wing") leads, in plastic shipping tubes.

### Features

- Bounce-Free Operation
- $10^{11}$  Off-State Resistance
- 1,000 V/ $\mu$ sec dv/dt
- 0.2  $\mu$ V Thermal Offset
- 5 mA Input Sensitivity
- 4,000 V<sub>RMS</sub> I/O Isolation
- Solid-State Reliability
- UL Recognized
- ESD Tolerance:
  - 4000V Human Body Model
  - 500V Machine Model

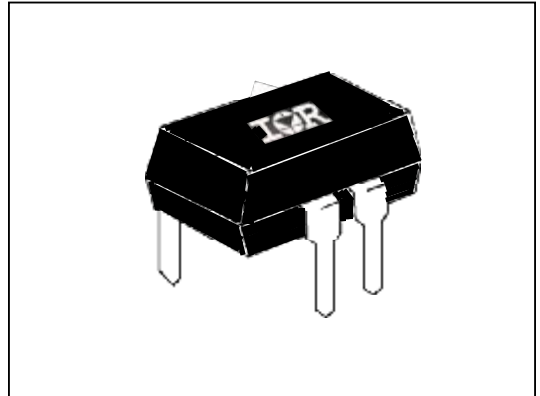

### Applications

- Process Control
- Data Acquisition
- Test Equipment
- Multiplexing and Scanning

### Part Identification

|                |                             |
|----------------|-----------------------------|
| PVA3054NPbF    |                             |
| PVA3055NPbF    | thru-hole                   |
| PVA3054NSPbF   |                             |
| PVA3054NS-TPbF | surface-mount tape and reel |
| PVA3055NSPbF   | surface-mount (gull-wing)   |

*(HEXFET is the registered trademark for International Rectifier Power MOSFETs)*


**Electrical Specifications** ( $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$  unless otherwise specified)

| INPUT CHARACTERISTICS                                                                                                                              | PVA3054N    | PVA3055N | Units                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|-------------------------------------|
| Minimum Control Current (see figure 1)<br>For 55mA Continuous Load Current<br>For 50mA Continuous Load Current<br>For 35mA Continuous Load Current | 2<br>5<br>5 |          | DC<br>mA@25°C<br>mA@40°C<br>mA@85°C |
| Maximum Control Current for Off-State Resistance at 25°C                                                                                           | 10          |          | μA(DC)                              |
| Control Current Range (Caution: current limit input LED. See figure 6)                                                                             | 2.0 to 25   |          | mA(DC)                              |
| Maximum Reverse Voltage                                                                                                                            | 6.0         |          | V(DC)                               |


| OUTPUT CHARACTERISTICS                                                                                                                               | PVA3054N         | PVA3055N         | Units    |
|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------|----------|
| Operating Voltage Range                                                                                                                              | 0 to ± 300       |                  | V(PEAK)  |
| Maximum Load Current 40°C I LED 5mA                                                                                                                  | 50               |                  | mA(DC)   |
| Response Time @25°C (see figures 6 and 7)<br>Maximum T(on) @ 12mA Control, 20 mA Load, 100 VDC<br>Maximum T(off) @ 12mA Control, 20 mA Load, 100 VDC | 60<br>100        |                  | μs<br>μs |
| Max. On-state Resistance 25°C (Pulsed) (fig. 3) 10 mA Load, 5mA Control                                                                              | 160              |                  | Ω        |
| Minimum Off-state Resistance 25°C @ 240 VDC                                                                                                          | 10 <sup>10</sup> | 10 <sup>11</sup> | Ω        |
| Maximum Off-state Leakage 25°C @ 5.0 VDC (see figure 4)                                                                                              | —                | 0.05             | nA       |
| Maximum Thermal Offset Voltage @ 5.0mA Control V <sub>O(OS)</sub>                                                                                    | 0.2              |                  | μvolts   |
| Minimum Off-State dv/dt                                                                                                                              | 1000             |                  | V/μs     |
| Typical Output Capacitance (see figure 8)                                                                                                            | 2.2              |                  | pF @ 40V |

| GENERAL CHARACTERISTICS (PVA3054N and PVA3055N)                             |           | Units                                 |
|-----------------------------------------------------------------------------|-----------|---------------------------------------|
| Dielectric Strength: Input-Output                                           |           | 4000<br>V <sub>RMS</sub>              |
| Insulation Resistance: Input-Output @ 90Vdc                                 |           | 10 <sup>12</sup> @ 25°C - 50% RH<br>Ω |
| Maximum Capacitance: Input-Output                                           |           | 1.0<br>pF                             |
| Max. Pin Soldering Temperature (1.6mm below seating plane, 10 seconds max.) |           | +260                                  |
| Ambient Temperature Range:                                                  | Operating | -40 to +85                            |
|                                                                             | Storage   | -40 to +100                           |
|                                                                             |           | °C                                    |


International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.

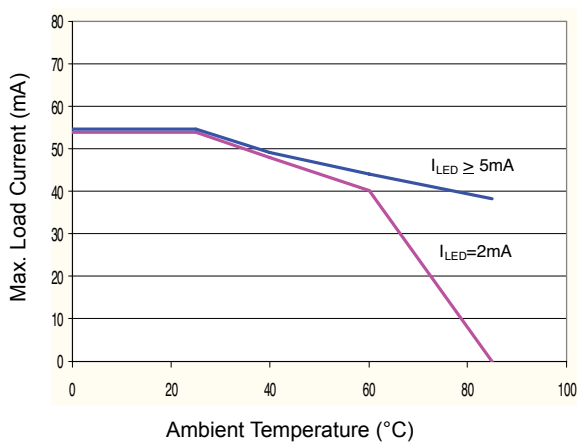


**Figure 1. Current Derating Curves**

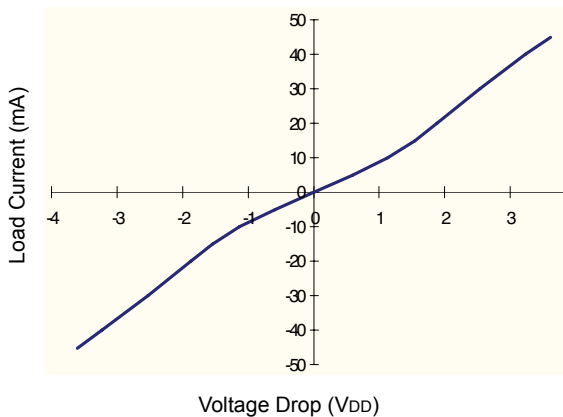


**Figure 2. Typical On Characteristics**

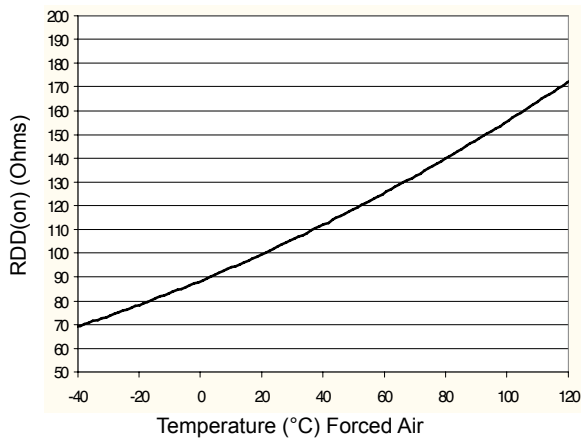


**Figure 3. Typical On-Resistance**

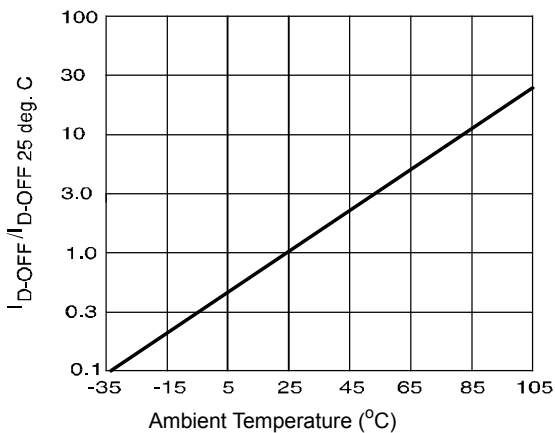


**Figure 4. Typical Normalized Off-State Leakage**

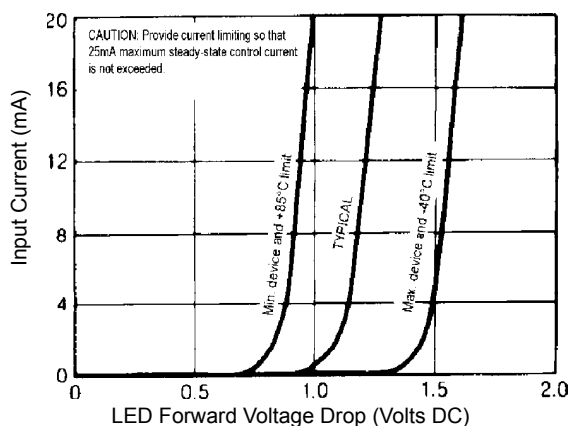


**Figure 5. Input Characteristics  
(Current Controlled)**

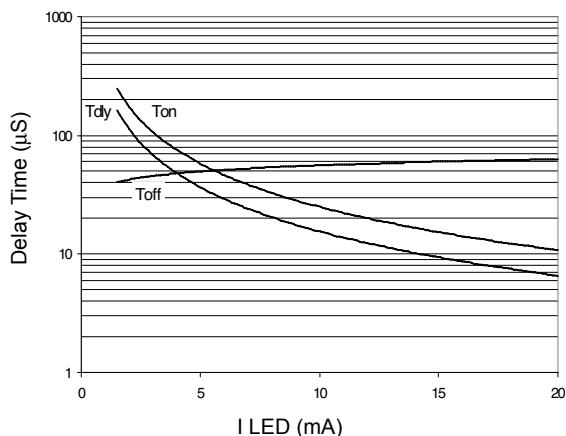

**Figure 6. Typical Delay Times**

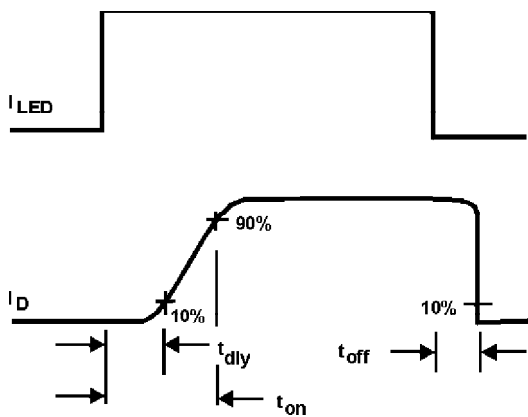


**Figure 7. Delay Time Definitions**

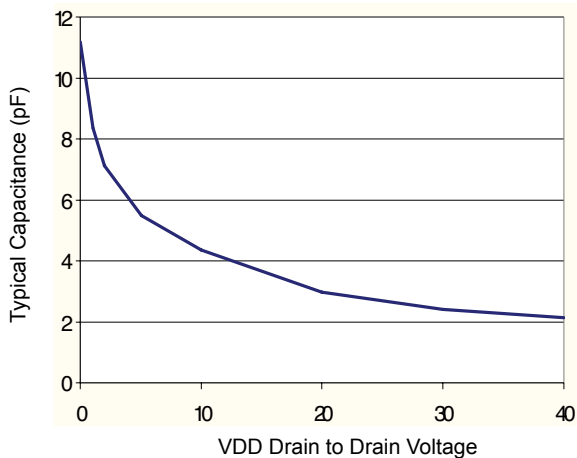


**Figure 8. Typical Output Capacitance**

## Wiring Diagram

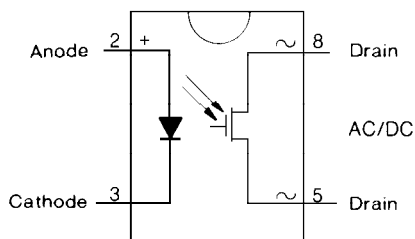



## Case Outlines

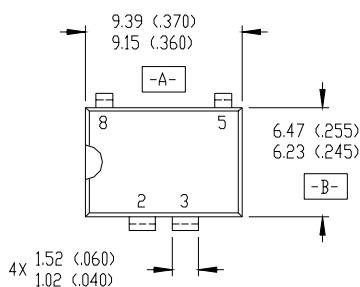


### NOTES:

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-001AB.

⑤ MEASURED WITH THE LEADS CONSTRAINED TO BE PERPENDICULAR TO DATUM PLANE C.

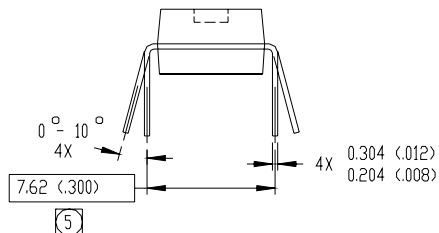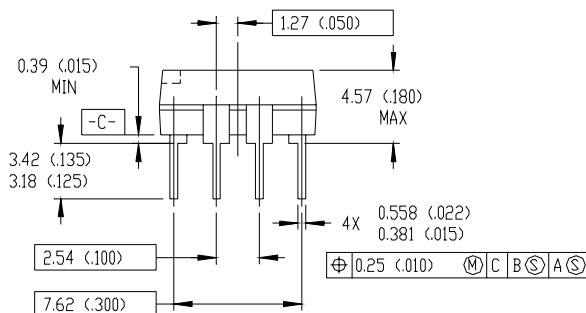

01-2013 00 (MS-001AB)

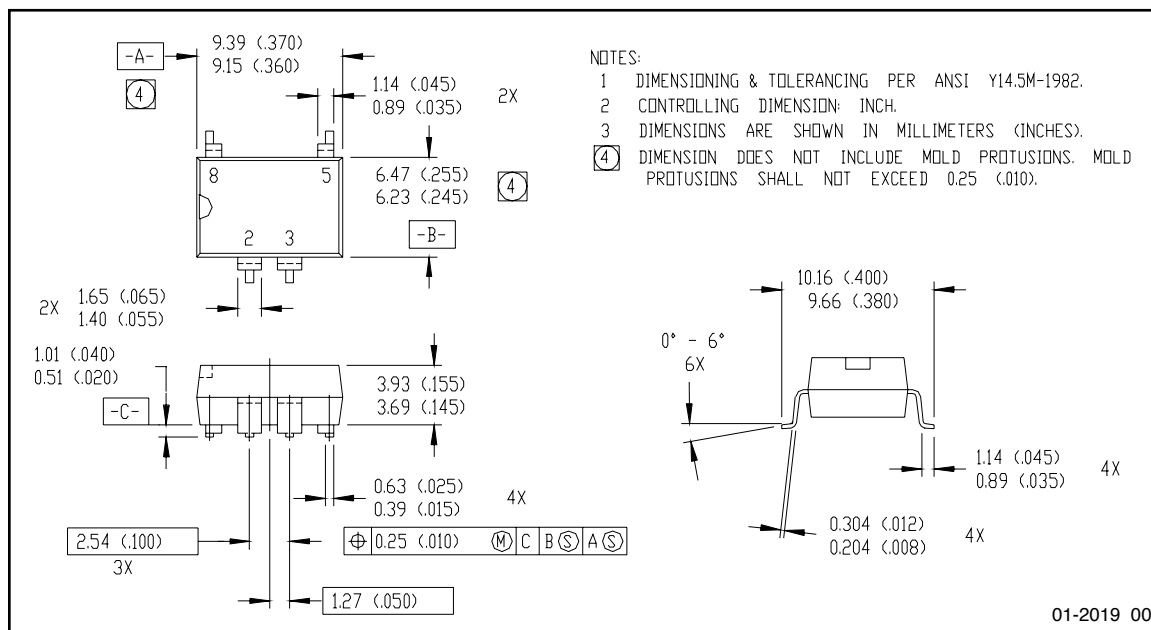

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9