

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

Product Description

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N represent a breakthrough in PSA tape and conductive gasket technology. 3M eCAP products are self-stick EMI gaskets or adhesive transfer tapes which provide good electrical conductive path for EMI shielding and grounding in electronic devices. Developed with 3M proprietary technology, 3M eCAP achieves a unique filler distribution in three-dimensional structures throughout the adhesive matrix. This filler distribution in a high performance 3M adhesive makes the tape have good xyz-axis electrical conductivity and good adhesion performance. 3M eCAP products are an excellent choice of EMC designers for initial to final stages of EMC design for electronic components and assemblies.


Product Features

- Competitive price with low conductive filler content
- No burr
- Various thickness
 - Standard thickness of 7830N: 0.2, 0.3, 0.4, 0.5 mm
- Easy application in die-cut or in roll form
- No need for additional process for PSA coating
- Single-sided
- Good XYZ-axis electrical conductivity
- Good shock absorption and damping performance
- Good adhesive and cohesive strength
- Rework – easy removal without adhesive residue

Applications

3M eCAP Pads are a combination of established 3M adhesive technology with state-of-the-art conductive technology. The PSA matrix is filled with conductive fillers which allow interconnection between substrates through the adhesive thickness (the “Z-axis”), and also helps provide electrical conductivity and EMI shielding in the plane of the adhesive (“X-Y Axis”). 3M eCAPs are ideal for EMI/RFI shield and EMI/RFI gasket to metal surfaces and also electrical bonding and grounding. 3M eCAP Pads can be applied as die cut parts or in roll form and offers excellent cutting properties in various converting process.

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

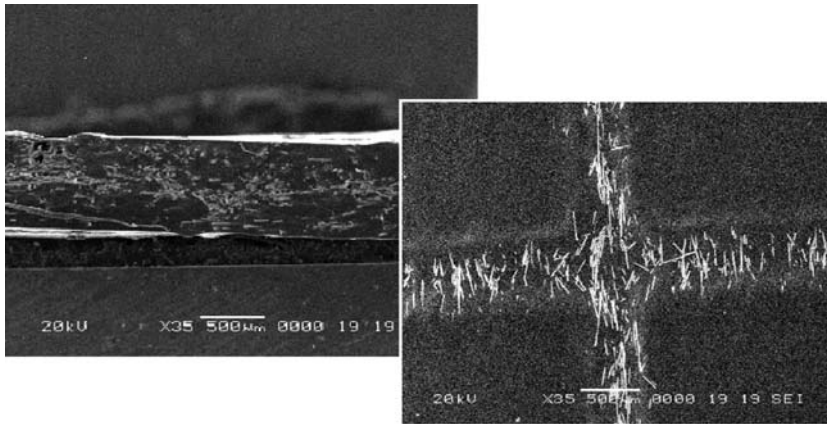


Electrically conductive fillers distributed in z and x,y-axis (Left) and exposed on the adhesive surface(Right) of 3M™ XYZ-Axis Electrically Conductive Acrylic Pads (eCAP)

Physical Properties

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N, a conductive gasket line with single-sided adhesion, consists of a high performance 3M acrylic adhesive loaded with conductive fillers and a conductive fabric laminate. 3M eCAP 7830N is the best choice for gasket in 0.1 ~ 0.45 mm gap in electronic components and devices.

Product Description of 3M eCAP 7830N

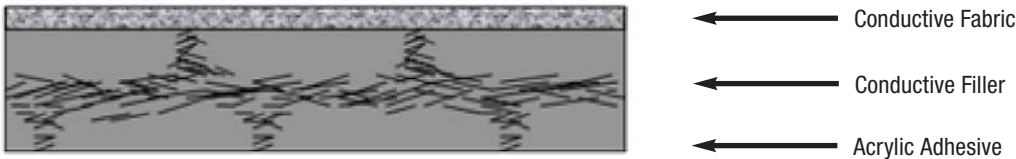

| Conductive Fabric | |
|-------------------|------------------|
| Color | Dark Grey |
| Woven Material | PET Woven Fabric |
| Pleated Material | Copper - Nickel |
| Thickness | 0.05 mm |

| Conductive Acrylic Adhesive | |
|-----------------------------|-------------------------------------|
| Color | Black |
| Conductive Filler | Nickel-Coated Graphite Fiber |
| Adhesive | Acrylic Pressure-Sensitive Adhesive |

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

Typical Properties

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

| Product Number | 3M™ Electrically Conductive Acrylic eCAP Pads 7830N | Test Method |
|--------------------------------------|---|-------------|
| Pad Thickness | 0.2, 0.3, 0.4, 0.5 mm | 3M TM |
| 180° Peel Adhesive | 700 ~ 100 gf / inch | 3M TM |
| Surface Resistance on Fabric Surface | 10 Ω / | 3M TM |
| Z-axis Resistance | 0.5 Ω | 3M TM |
| Compression Deflection ¹ | 15 kg/in ² | 3M TM |
| Compression Set ² | 14% | 3M TM |

¹ Compression Deflection: Measured at 25% compression (12 mm/min)

² Compression Set: Compressed 25% for 22 hrs at 70°F, expressed as a percentage of the original thickness, as follows:


$$Cd = [(t_0 - t_f) / t_0 \times 100]$$

Cd = compression set expressed as a percent of the original thickness

t₀ = original thickness of test specimen

t_f = final thickness of test specimen

Force Displacement Resistance Curve of 3M™ Electrically Conductive Acrylic eCAP Pads 7830N 0.2 ~ 0.5T:

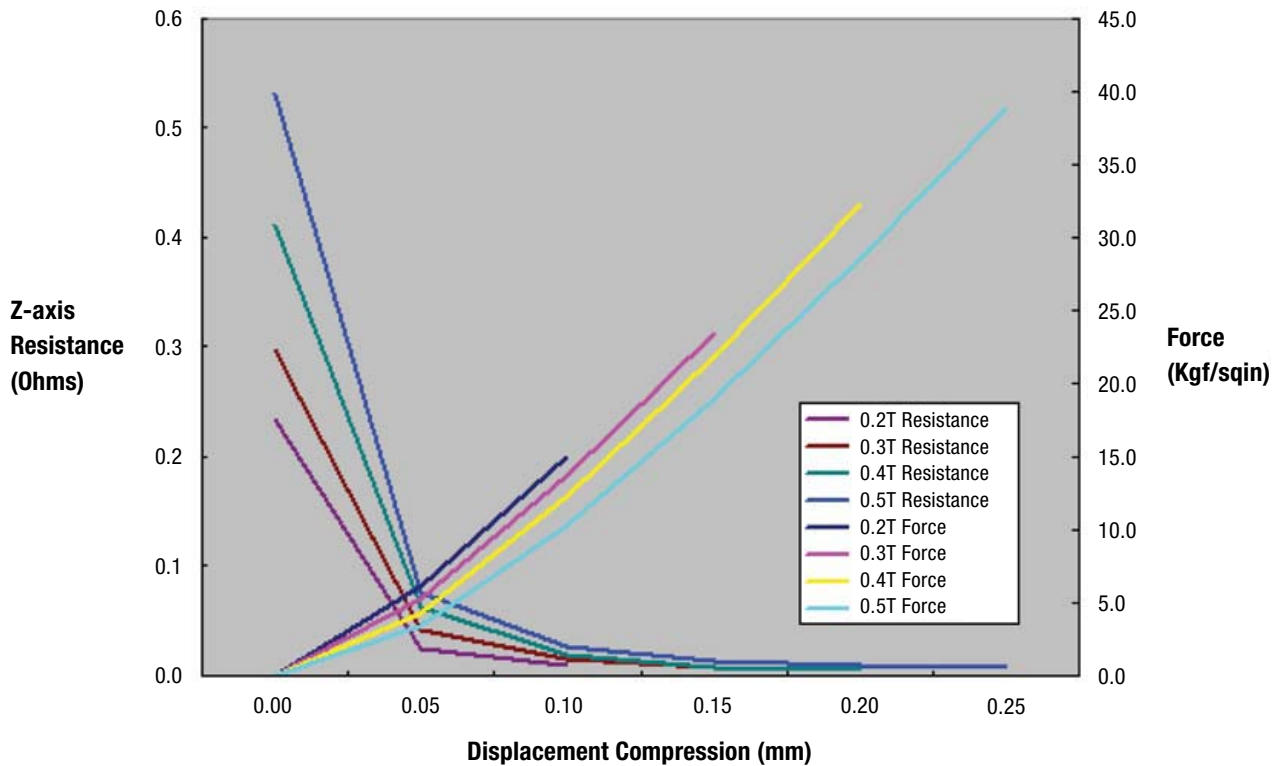

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

Certification/Recognition

MSDS: 3M has not prepared a MSDS for this product which is not subject to the MSDS requirements of the Occupational Safety and Health Administration's Hazard Communication Standard, 29 C.F.R. 1910.1200(b)(6)(v). When used under reasonable conditions or in accordance with the 3M directions for use, the product should not present a health and safety hazard. However, use or processing of the product in a manner not in accordance with the directions for use may affect its performance and present potential health and safety hazards.

TSCA: This product is defined as an article under the Toxic Substances Control Act and therefore, it is exempt from inventory listing requirements.

RoHs Complaint/REACH Compliant: This product complies with the European Union's "Restriction of Hazardous Substances" (RoHs) initiative and with European REACH regulations 2002/95/EC and 2005/618/EC.

For Additional Information

To request additional product information or to arrange for sales assistance, call toll free 1-800-251-8634. Address correspondence to: 3M, Electronics Markets Materials Division, 3M Center, Building 225-3S-06, St. Paul, MN 55144-1000. Our fax number is 651-778-4244 or 1-877-369-2923. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Electronics Markets Materials Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
1-800-251-8634 phone
651-778-4244 fax
www.3M.com/electronics

3M is a trademark of 3M Company.
Please recycle. Printed in U.S.A.
©3M 2011. All rights reserved.
60-5002-0502-0



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9