
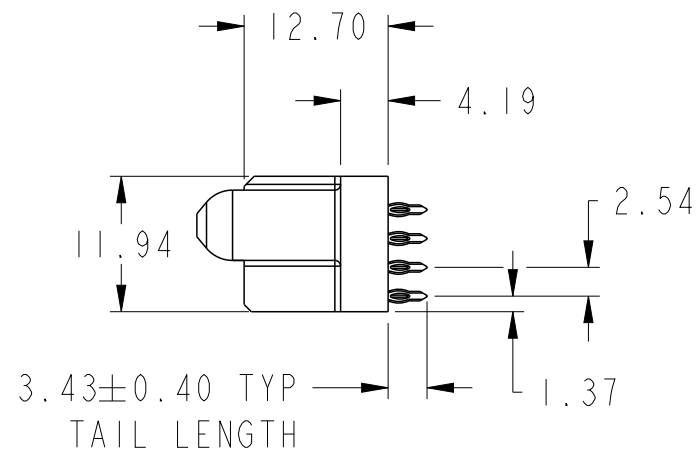
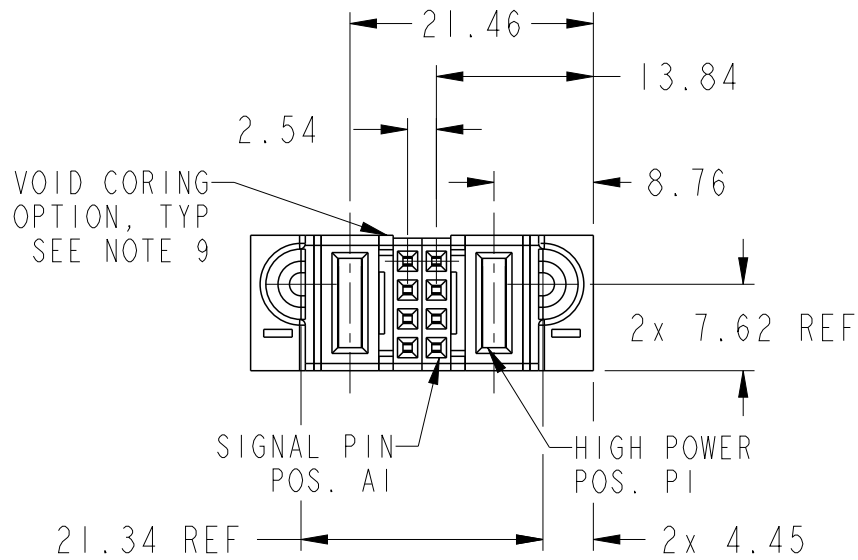
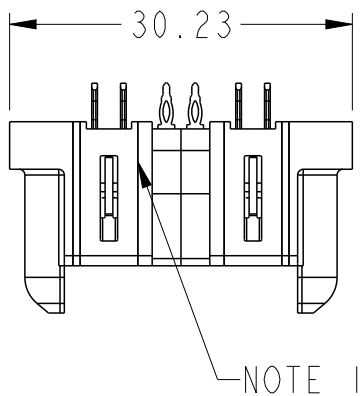


PRODUCT NUMBER SEE SHEET 2

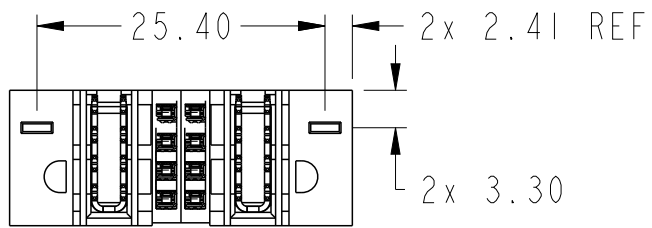

spec ref				dr	Rainbow Zhan	2014/10/21	projection	MM	size	A3	scale	3:2	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2016/09/05			ecn no				-
ASME Y14.5				chr	Fancy Zhang	2016/09/05			rel level				Released
				appr	Pei-Ming Zheng	2016/09/05			product family				PowerBlade+
surface ASME Y14.5	linear	0.X	±0.50	Amphenol FCi	title				IP + 8S + IP	dwg no	10106269-2002001	rev	A
		0.XX	±0.25										
		0.XXX	±0.10										
		angular	0°	±2°		cat. no.		Product - Customer Drw				sheet 1 of 3	

A

B

C

D

A


B

C

D

PRODUCT NO.	ROWS		HP	S I		HP	
		E1	P2	2	1	P1	E2
10106269-2002001LF	D C B A		HG	F F F F		HD	

CODE	DESCRIPTION
F	STD SIGNAL CONTACT
HD	MFBL HIGH POWER CONTACT (3.43)
HG	STD HIGH POWER CONTACT (3.43)

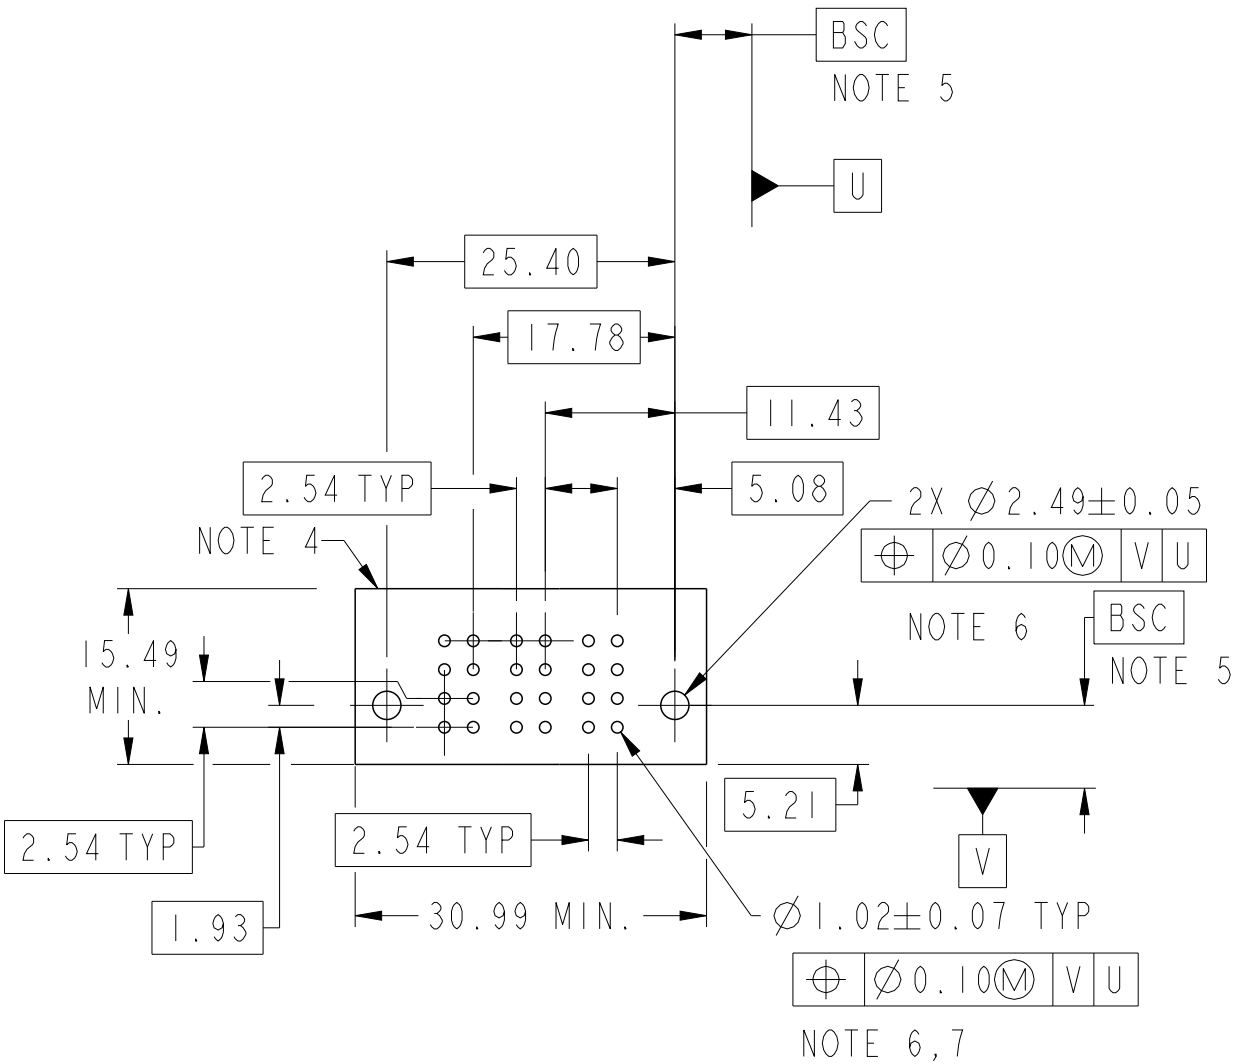

spec ref				dr		Rainbow Zhan	2014/10/21		projection				MM		size		A3	scale		3:2																															
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Rainbow Zhan	2016/09/05						ecn no					-																															
ASME Y14.5						chr		Fancy Zhang	2016/09/05						rel level										Released																										
						appr		Pei-Ming Zheng	2016/09/05						product family										PowerBlade+																										
surface				linear		0.X		±0.50		Amphenol FCI		title										IP + 8S + 1P										dwg no		10106269-2002001										rev		A					
																																																0.XX		±0.25	
ASME Y14.5		angular		0°		±2°				cat. no.										Product - Customer Drw										sheet 2 of 3																					

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr	Rainbow Zhan	2014/10/21	projection 	MM 	size	A3	scale	1:1
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2016/09/05			ecn no -			
				chr	Fancy Zhang	2016/09/05			rel level Released			
				appr	Pei-Ming Zheng	2016/09/05	product family PowerBlade+					
surface  ASME Y14.5	linear	0.X	±0.50	Amphenol FCi	title IP + 8S + IP VT PF RECEPTACLE			dwg no 10106269-2002001	rev A			
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°		cat. no.			Product - Customer Drw			sheet 3 of 3	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9