

IDP31-190

100% flat fronted touch and non-touch, Industrial grade monitors. Ultra thin profile, smooth rounded corners and rugged glass fronted for a totally contemporary outlook.

NEW



FCC CE RoHS COMPLIANT PRODUCT

Features

- 19.0" LCD panel with LED backlight for long service life
- Wide operating temperature -10 to +70° C for broad range of applications
- Regular brightness 350 CD/m²
- True flat surface – contemporary Proflat style
- Wide view-angle for portrait and landscape mode
- Built-in audio and speakers
- Thin profile, enclosure – no need for additional enclosures or metalwork
- Multi-touch PCT touch overlay
- Configurable Options:
 - Brightness 350 CD/m²
 - View angle 85°/85°/80°/80°
 - Mechanical housing
 - VGA, DVI, HDMI interface

Introduction

The IDP31-190 Proflat series responds to a demand for contemporary styling in demanding applications such as public signage, front of house information, medical and point-of-sale. Each product features a truly-flat, easy to clean and maintain glass surface with long term product availability. All products can be used in either portrait or landscape mode and are cleverly packaged in such a way that no further mechanical parts are needed other than a VESA mount to create a display system. The use of a metal chassis provides a rugged and stable platform to build solutions for the widest range of applications. Optional multi-touch and the choice of both black or white finish creates further opportunity for those seeking to differentiate their next product design.

Typical Applications


- Signage and public information
- Way-finder
- Kiosks and point of sale
- Medical
- Digital assistant

Specifications

Display Features	Spec	Notes
Model	IDP31-190	
Backlight	LED	Light source
Resolution	1280 x 1024	Native resolution. Other resolutions supported by A/D card scaling
Brightness	350 cd/m ²	Measured at typical operating voltage
Viewing Angle	85°/85°/80°/80°	Left/Right/Up/Down
Surface Treatment	3H	MoHS/Anti glare
Contrast Ratio	1000:1	In laboratory measurement conditions
Max Colors	16.7M	6 bit per colour
Response Time	10 ms	Typical
Backlight Lifetime	50,000 hours	Typ. time to half brightness in room temperature operation
Cover glass	3mm toughened	
Operating Temp	-10° to +70° C	Industrial use
Touch Screen	10 points PCT	Projected Capacitive overlay (USB)
Input / Output	VGA, DVI, HDMI	Audio output 3W
IP Rating	IP54	Front & Side of the monitor

Dimensions

Unit: mm

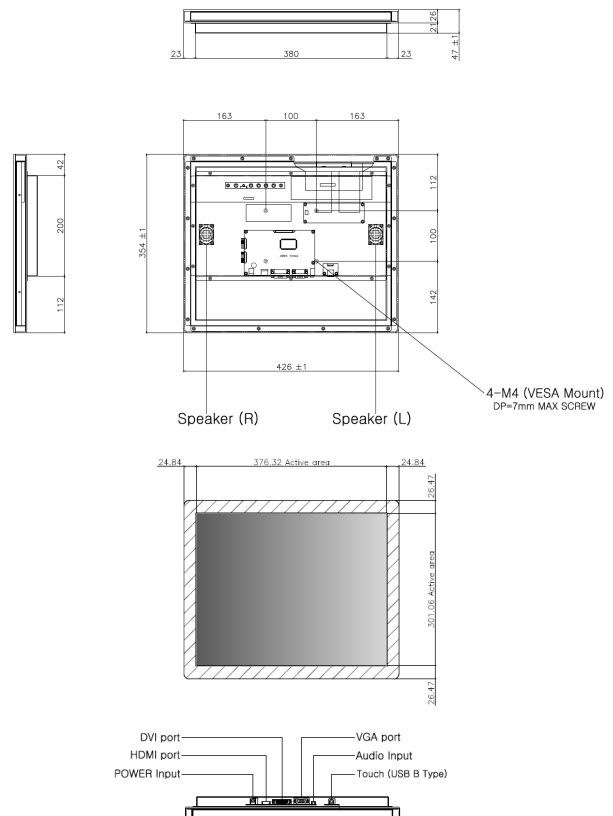

Touch Screen Options

Type 19.0" Screen	Cover glass (CG)	Analogue Resistive (AR)	Surface Acoustic Wave (SAW)	Surface Capacitive (SCAP)	Projected Capacitive (PCT)	Infra-red (IR)	Multi-touch
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Construction	3mm heat strengthened glass	ITO film to ITO coated glass	4mm pure glass sensor	Hard coat ITO pure glass	ITO film/film with Chemical strengthened glass	3mm tempered glass with infrared sensor	Either PCT or IR
Surface Durability (no of touches)	7H	3H	7H	<4H	<4H	7H	-
IP Rating (potential)	-	> 1m	>5m	>1m	>1m	>1m	-
IP Rating (potential)	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Touches	0	1	1	1	1/2/10/30	1040g/63.5mm	-
Transparency	93±2%	81%	90±5%	91±1.5%	82%	-	-
Drop Ball	500g / 50cm	227g/38Φ steel ball from 80cm height	1040g / 90cm	UL60950 (Tough touch only)	227g/38Φ steel ball from 80cm height	1040g/63.5mm ball dropped from height of 1.0m	227g/38Φ steel ball from 80cm height
Added thickness (typ.)	4/5/6/10/12mm	1.8mm	6mm	8mm	3/4/5/6m	See drawing	See drawing
Custom Options	AR coating Optical bonding	Optical bonding	Dustproof, Waterproof, Antiglare, Safe touch	Optical bonding, Tough touch	AR coating, Glass painting, Customer logo, 10point touch (21.5",23",24"), Optical bonding	2point, AR coating, Optical bonding	Extended cover glass Back printing Whole cutting

System/Electrical Features

System / Electrical	Spec	Unit / Notes
Power Consumption	18.0W	Typical consumption at standard brightness and temperature
Power Supply	12V / 3.5A	External DC power brick (included) Input voltage-DC +12V +/-5% @ 2.5A max Power connector: DC jack
Video Input (available options)	<input checked="" type="checkbox"/> VGA <input checked="" type="checkbox"/> DVI <input checked="" type="checkbox"/> HDMI COMPOSITE USB DisplayPort	Native resolution. Other resolutions supported by A/D card scaling
On-screen Display (OSD)	5- keys Menu Functions	Menu / up / down / enter / Power ON-OFF Brightness, Contrast, Screen Setting, Colour Temp, Language OSD Settings, VGA/DVI, Recall, Auto Adjust
Custom BIOS options		

Mechanical Features

Mechanical	Spec	Notes
Overall size	426 x 354 x 47 mm	[proflat]
Active Area Size	376.32 (H) x 301.06 (V) mm	
Case / Bezel color	Black or White powder coat	Custom colour and finishes available
Weight	4.5kg	Typ .inc touch
VESA Mounting Options:	100 x 100	For User defined mounting requirements contact rep

Environmental Features

Environmental	Spec
Operating Temp	-10 to +70° C
Storage Temp	-30 to +85° C
Humidity	80% RH
Vibration	1.5G, (10~200Hz, P-P) 30 mins/axis (X, Y, Z)
Agency Approvals	CE, FCC, RoHS

Ordering Information

Model Name	Description
IDP31-190-P35HIB1E	19.0" Industrial black ProFlat monitor with PCT Multi-touch touchscreen, 350CD/m ² brightness, VGA & DVI & HDMI input
IDP31-190-P35HIW1E	19.0" Industrial white ProFlat monitor with PCT Multi-touch touchscreen, 350CD/m ² brightness, VGA & DVI & HDMI input

Accessory Package

- Power supply (110V-240V), UK/EU/US power cord, VGA cable, DVI cable, USB cable for touch function

All Advantech monitors are configurable to order. Use www.advantech.com for guidance on versions, pricing and deliver for all models

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9