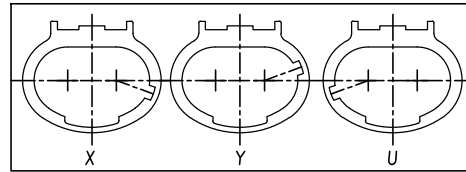
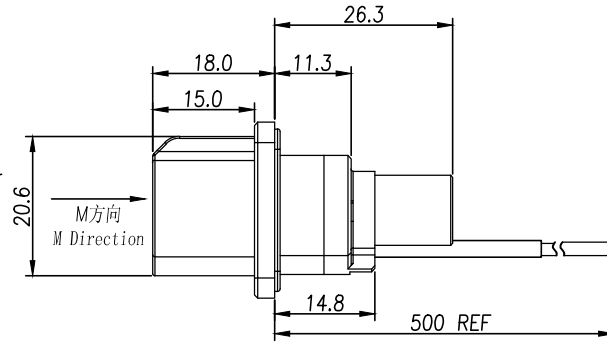
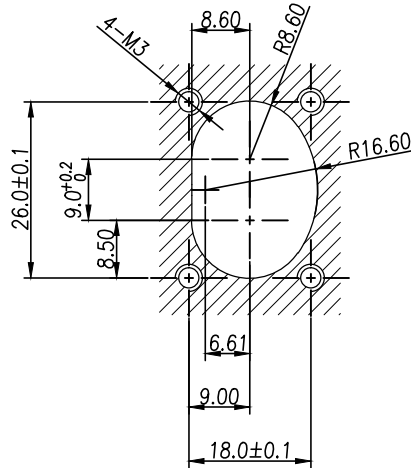
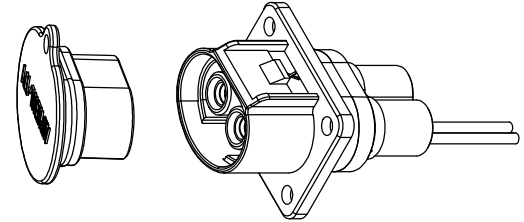
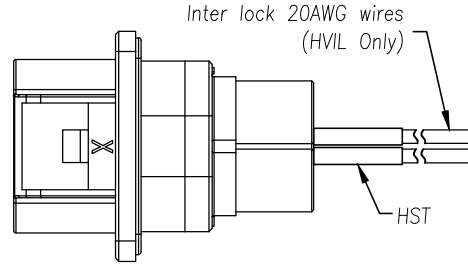




Customer Drawing

插座 - 非屏蔽
RCPT - UNSHIELDING CABLE

M方向键位示意图

Key Abridged General View of M Direction

面板安装孔尺寸
Panel Size

订购信息 Ordering Information

PL08	2	X	-	6	1	-	10
键位 Key		高压互锁 HVIL		线缆大小 Cable Size			
"X"		0, 不带互锁 No HVIL		"10"=10mm ² (Unshielding)			
"Y"		1, 带互锁 With HVIL		"6"=6mm ² (Unshielding)			
"U"				"4"=4mm ² (Unshielding)			
				"2.5"=2.5mm ² (Unshielding)			

规格参数(Spec.):

- 工作温度 Operating temperature:
-40° C~+125° C.
- 带高压互锁 Electrical interlock (HVIL).
- 额定电流 Current rating:
Power: 60A; HVIL: 5A.
- 额定电压 Operating voltage:
Power: 1000 VDC; Signal: 60 VDC.
- 耐电压 Dielectric withstanding voltage:
 - 与插头对插后, Pin与铁壳之间
After mating, between pin and metal shell :5000 VDC.
 - 与插头对插后, Pin与HVIL之间
After mating, between pin and HVIL :5000 VDC.
 - 与插头对插后, HVIL与铁壳之间
After mating, between HVIL and metal shell :500 VDC.
 - 与插头对插前, 两个HVIL端子之间耐压
Before mating, between two HVIL terminals :500 VDC.
- 防护等级 Protection class:IP67 & IP2X.
- 电磁屏蔽 Shielding.
- 机械寿命 Mating cycle:500 Min.
- 带自动二次锁扣 Automatic secondary lock.
- 接非屏蔽线 Accepted Unshielding Wire.
- 推荐法兰盘螺丝安装扭矩 Recommended Screw Assembly Torque on Flange : 0.86±20% Nm

REVISIONS

REV	ZONE	ECO	DESCRIPTION	DATE	BY	APPR
A	--	--	Updated Spec.	07/17/14	RW	EC
E	--	--	Add key abridged general view	09/17/15	RW	GX
F	--	--	Add Dust Cap & Change HVIL Wire, Update Spec.	03/30/16	RW	TS

Standard Part List (With HVIL)

P/N	Model NO.	Dimension "A"	Accepted Wire
AC-HA000749	PL082X-61-2.5	Ø2.3mm	2.5mm ² Unshielding wire
AC-HA000750	PL082Y-61-2.5		
AC-HA000751	PL082U-61-2.5		
AC-HA000752	PL082X-61-4	Ø3.0mm	4mm ² Unshielding wire
AC-HA000753	PL082Y-61-4		
AC-HA000754	PL082U-61-4		
AC-HA000755	PL082X-61-6	Ø4.0mm	6mm ² Unshielding wire
AC-HA000756	PL082Y-61-6		
AC-HA000757	PL082U-61-6		
AC-HA001082	PL082X-61-10	Ø4.5mm	10mm ² Unshielding wire
AC-HA001083	PL082Y-61-10		
AC-HA001084	PL082U-61-10		

Standard Part List (Without HVIL)

P/N	Model NO.	Dimension "A"	Accepted Wire Size
AC-HA000758	PL082X-60-2.5	Ø2.3mm	2.5mm ² Unshielding wire
AC-HA000759	PL082Y-60-2.5		
AC-HA000760	PL082U-60-2.5		
AC-HA000761	PL082X-60-4	Ø3.0mm	4mm ² Unshielding wire
AC-HA000762	PL082Y-60-4		
AC-HA000763	PL082U-60-4		
AC-HA000764	PL082X-60-6	Ø4.0mm	6mm ² Unshielding wire
AC-HA000765	PL082Y-60-6		
AC-HA000766	PL082U-60-6		
AC-HA001085	PL082X-60-10	Ø4.5mm	10mm ² Unshielding wire
AC-HA001086	PL082Y-60-10		
AC-HA001087	PL082U-60-10		

AMPHENOL



签名 SIGNATURE	日期 DATE	UNLESS OTHERWISE SPECIFIED
制图 DRAWN	12/31/13	1) All dimensions are in metric(mm).
审核 CHECKED	12/31/13	2) Tolerances are as follows:
批准 APPROVAL	12/31/13	0 PL DEC ±1.00
		1 PL DEC ±0.50
		2 PL DEC ±0.20

Amphenol Technical Products International GZ

第三角投影 THIRD ANGLE PROJECTION	页面 SHEET	幅面 SIZE	版次 REV.	比例 SCALE	PART NAME:
	1 of 1	A3	F		PwrLok 4mm 2POS Rcpt Conn
DWG NO:					PL082-60
CUST PART #:					N/A
					CUST REV.
					-

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9