

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
-	-	A		NEW DRAWING PER ECO-14-009318		11JUL2014	RH

SPECIFICATIONS

MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES.




CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR SILVER PLATED CONTACTS.

CONTACT RATING: 3 Amps @120 VAC OR 28 VDC
1 Amp @ 250 VAC

INSULATION RESISTANCE: 1,000 MΩ MIN.

DIELECTRIC STRENGTH: 1,000 Vrms MIN.@SEA LEVEL.

OPERATING TEMPERATURE: -30°C TO 85°C.

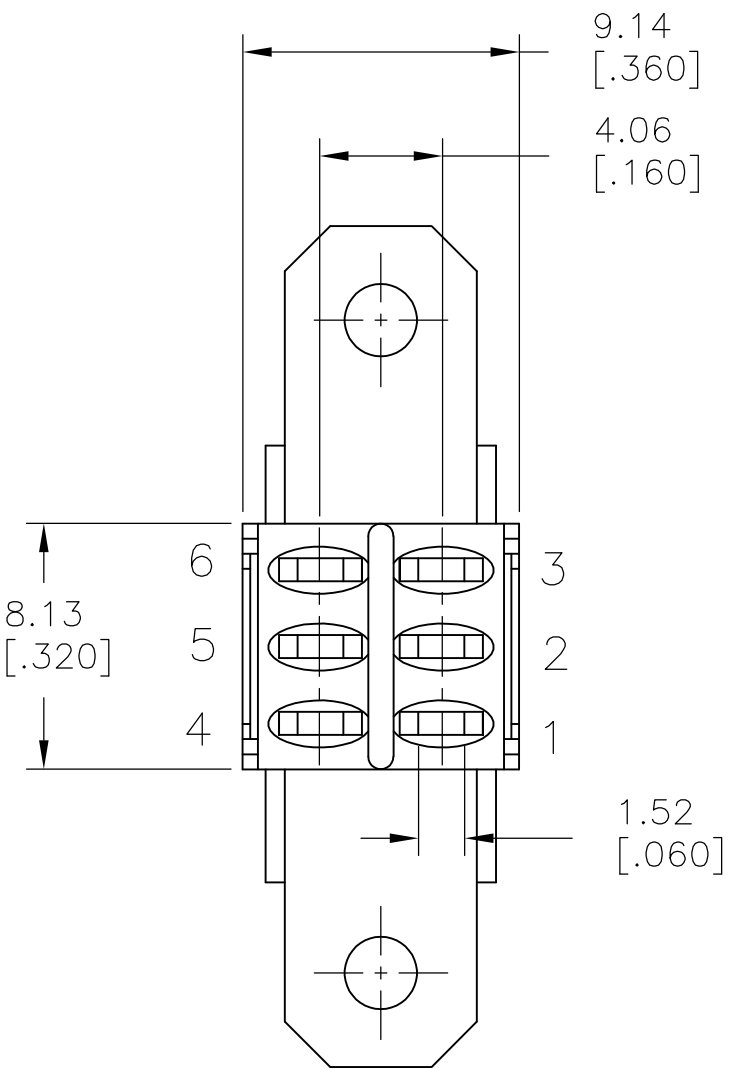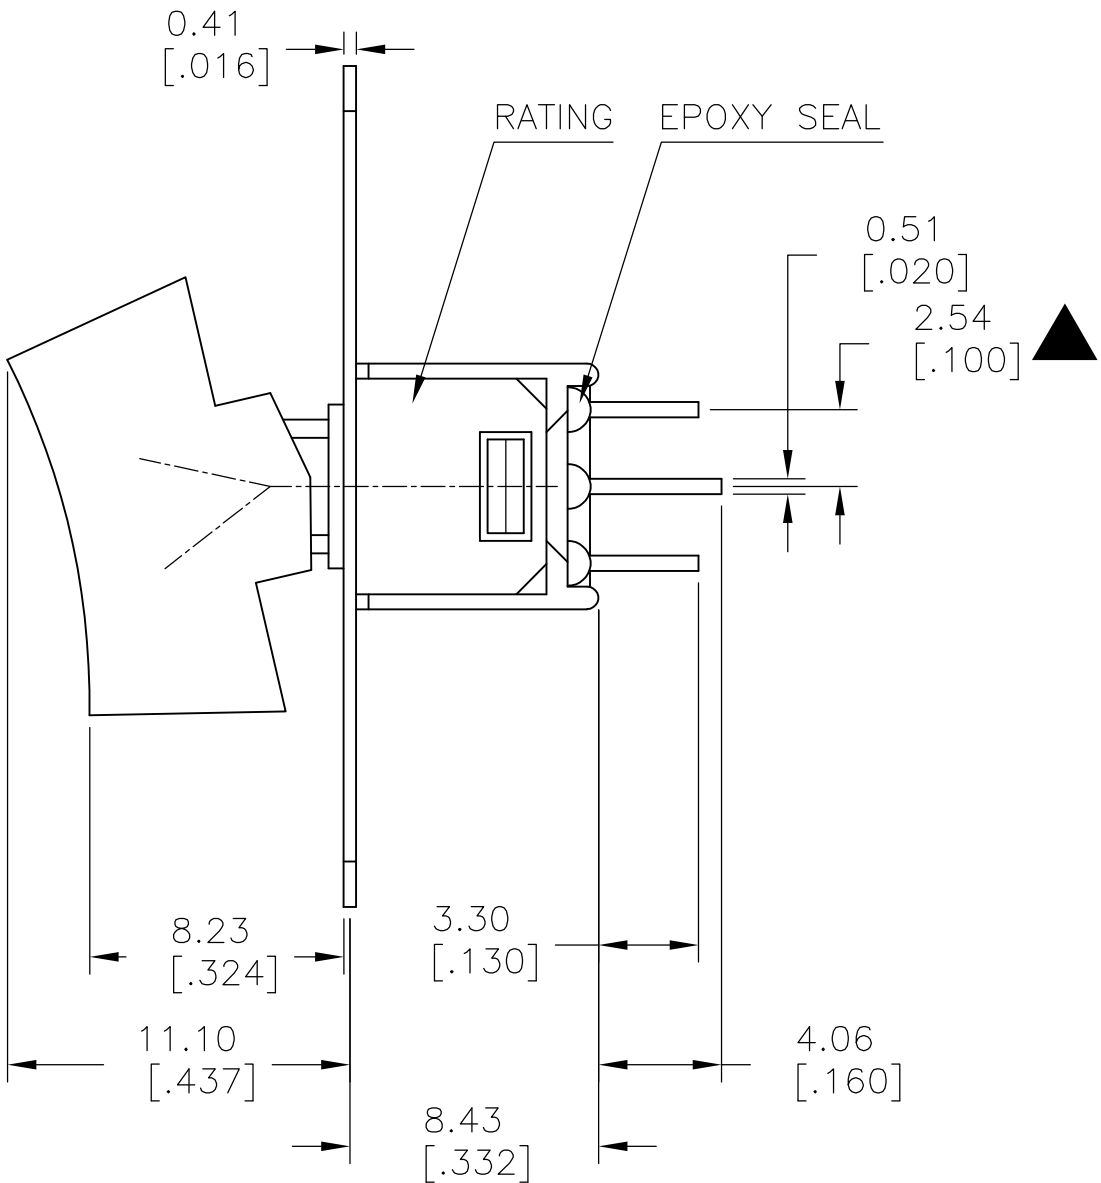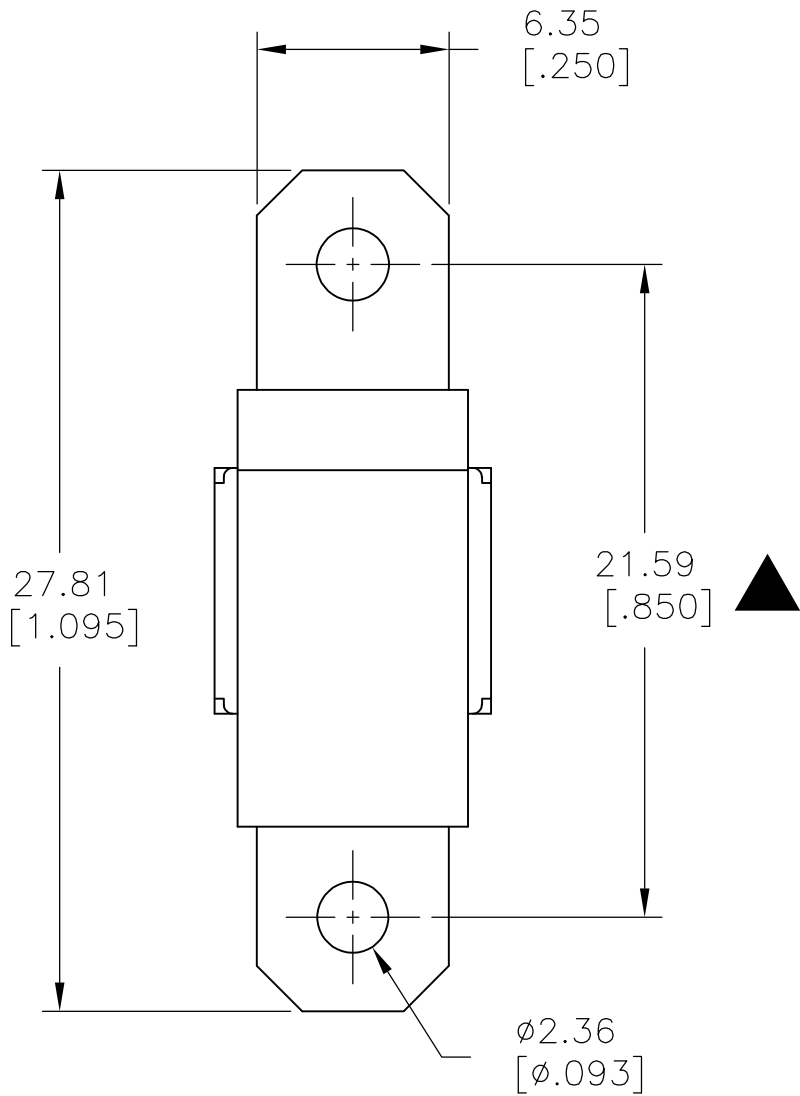

SILVER	2-1,5-4	2-3,5-6	ON-ON	V-BRACKET	VERTICAL	2	2	RMD1R102VS2QES	2267087-8
SILVER	2-1	2-3	ON-ON	V-BRACKET	VERTICAL	1	2	RMS1R102VS2QES	2267087-7
SILVER	2-1,5-4	2-3,5-6	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	2	2	RMD1R102M7QES	2267087-6
SILVER	2-1	2-3	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	1	2	RMS1R102M7QES	2267087-5
SILVER	2-1,5-4	2-3,5-6	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	2	2	RMD1R102M6QES	2267087-4
SILVER	2-1	2-3	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	1	2	RMS1R202M6QES	2267087-3
SILVER	2-1,5-4	2-3,5-6	ON-ON	SOLDER LUG	VERTICAL	2	2	RMD1R102M1QES	2267087-2
SILVER	2-1	2-3	ON-ON	SOLDER LUG	VERTICAL	1	2	RMS1R102M1QES	2267087-1
CONTACT MATERIAL	POS 2	POS 1	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	0.38[.015]
2 PLC	±	0.25[.010]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	5°

FINISH
-

DWN
NAGALAKSHMI K
CHK
HILL, RYAN
APVD
HILL, RYAN
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
-

11JUL2014
11JUL2014
11JUL2014

CUSTOMER DRAWING


TE Connectivity

NAME
SUBMINIATURE ROCKER SWITCHES

SIZE A2	CAGE CODE 00779	DRAWING NO C=2267087	RESTRICTED TO -
------------	--------------------	-------------------------	--------------------

SCALE 3:1	SHEET 1 of 5	REV A
--------------	-----------------	----------


D

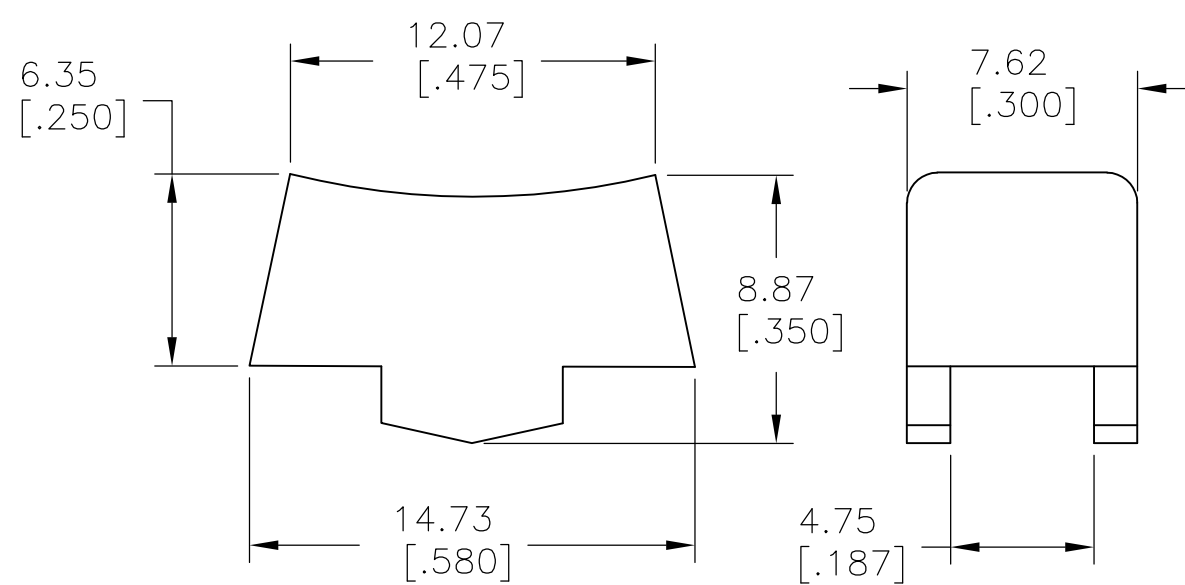

PANEL MOUNTING

R1

WIDE ACTUATOR

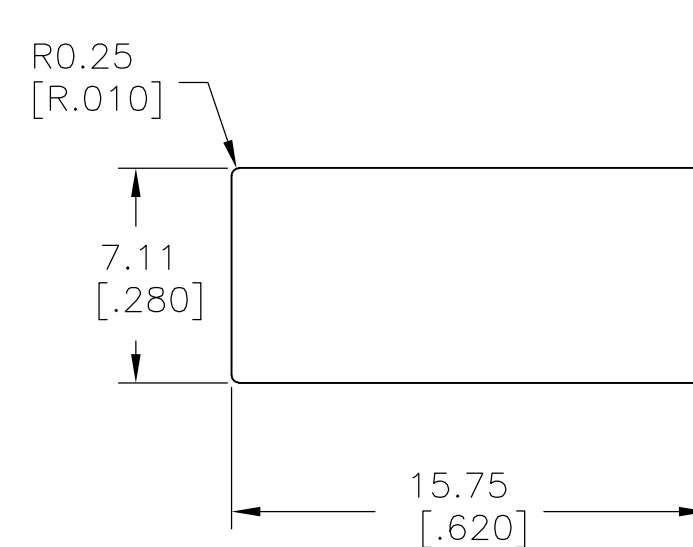

PANEL MOUNTING


R2

NARROW ACTUATOR


226/081

SPDT M1

SOLDER LUG

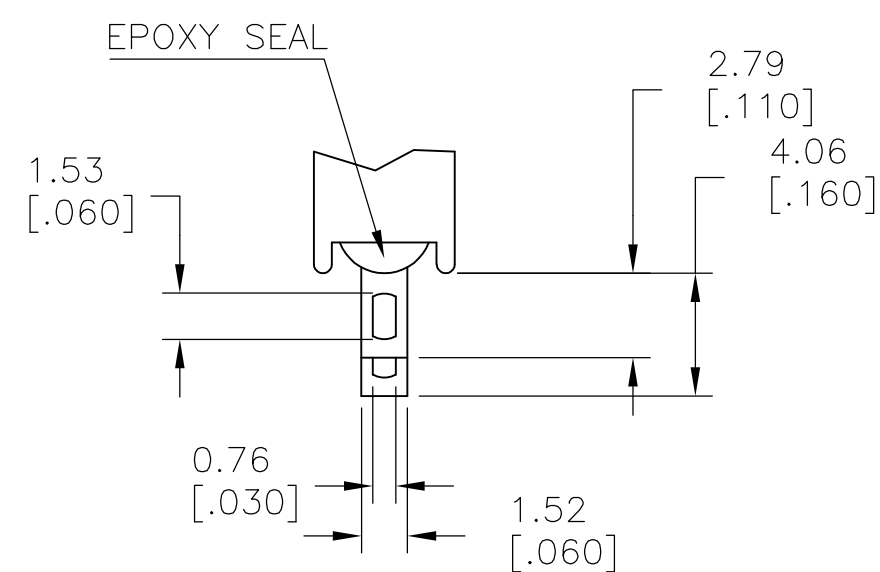

SOLDER LUG

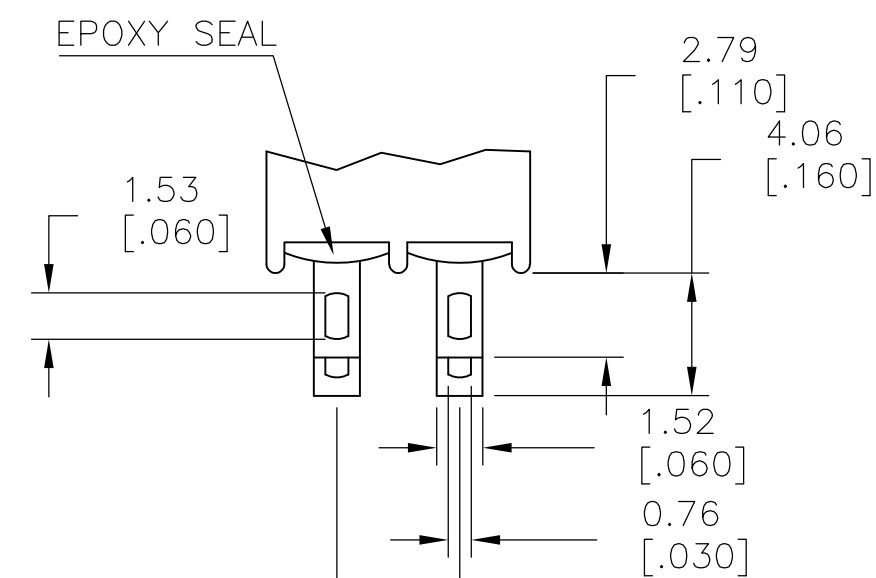

SOLDER LUG





DPDT M1

SOLDER LUG

LAYOUT FOR PN 2267087-1 & 2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11JUL2014 NAGALAKSHMI K CHK 11JUL2014 HILL, RYAN		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± - 1 PLC ± 0.38[.015] 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± 5°		APVO 11JUL2014 HILL, RYAN PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	
MATERIAL		FINISH		SIZE	RESTRICTED TO
-		-		A2 00779	-
CUSTOMER DRAWING				DRAWING NO	
				C-2267087	
				SCALE 3:1	SHEET 2 of 5
				REV A	





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
—	—		—	SEE SHEET 1	—	—	—

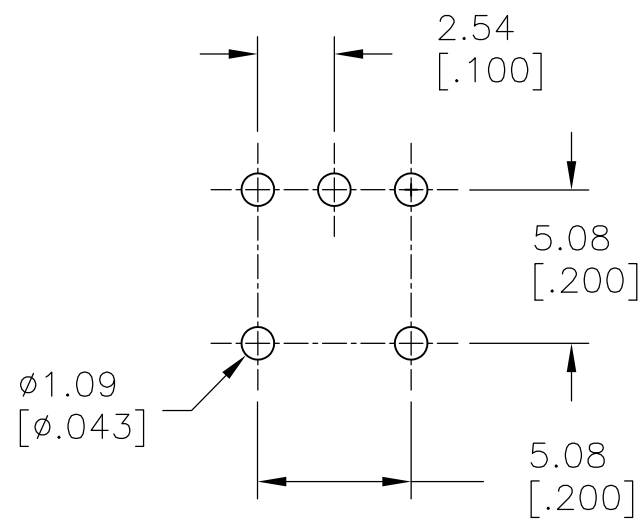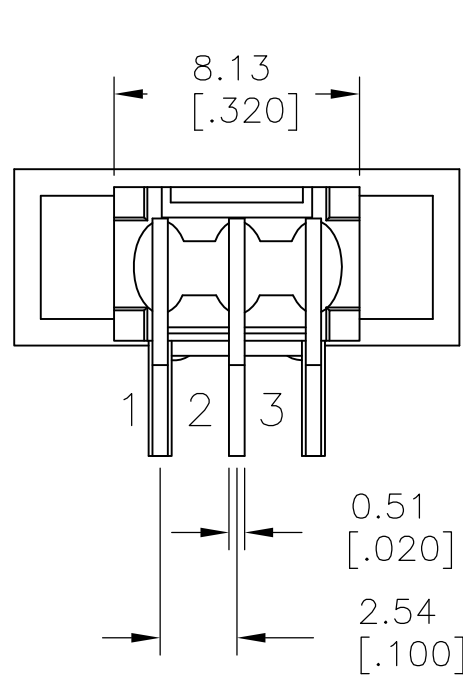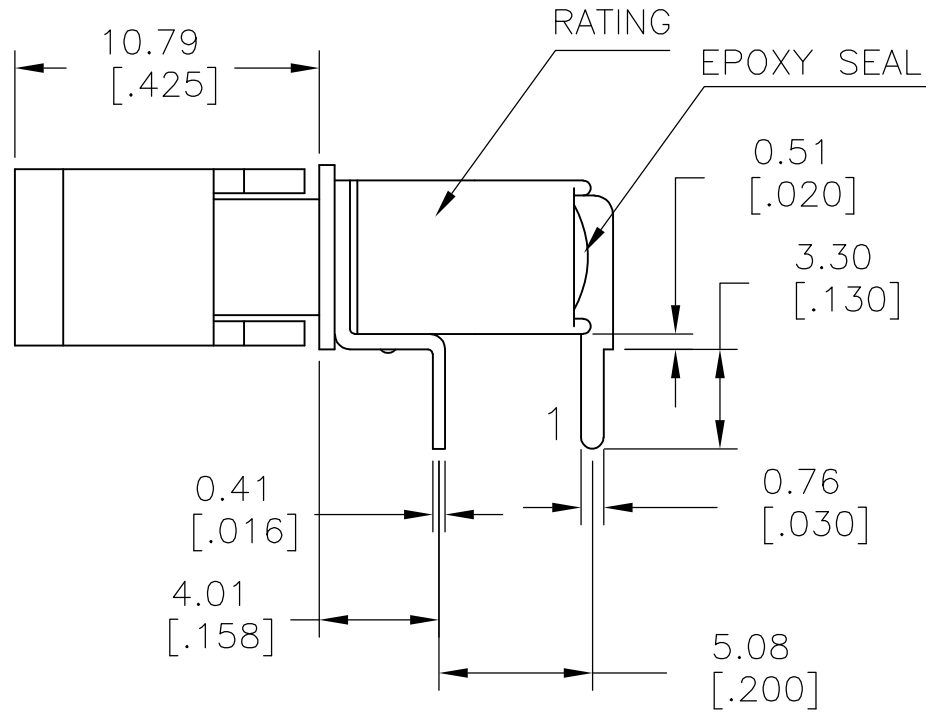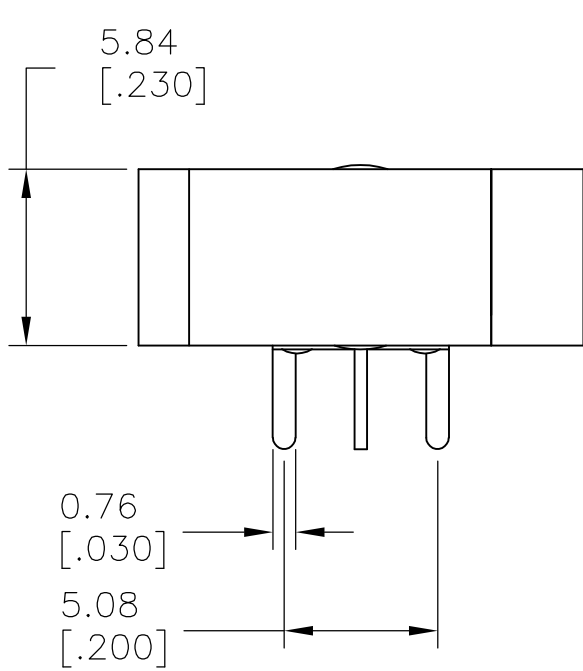

P.C. MOUNTING

SPDT M6

RIGHT ANGLE

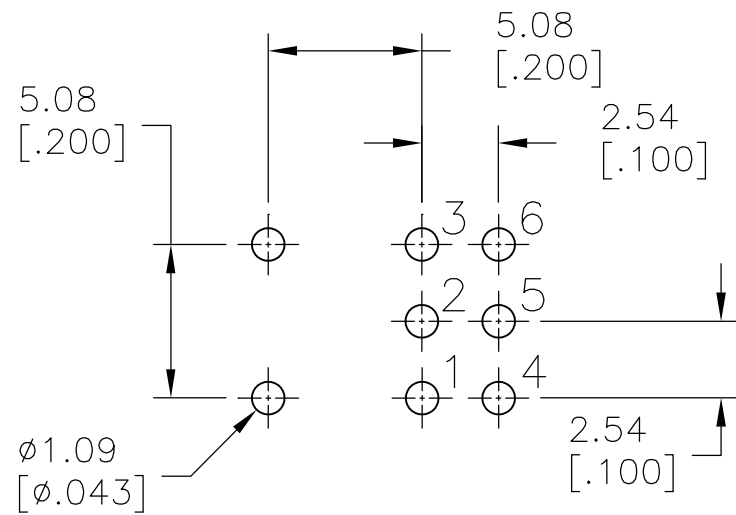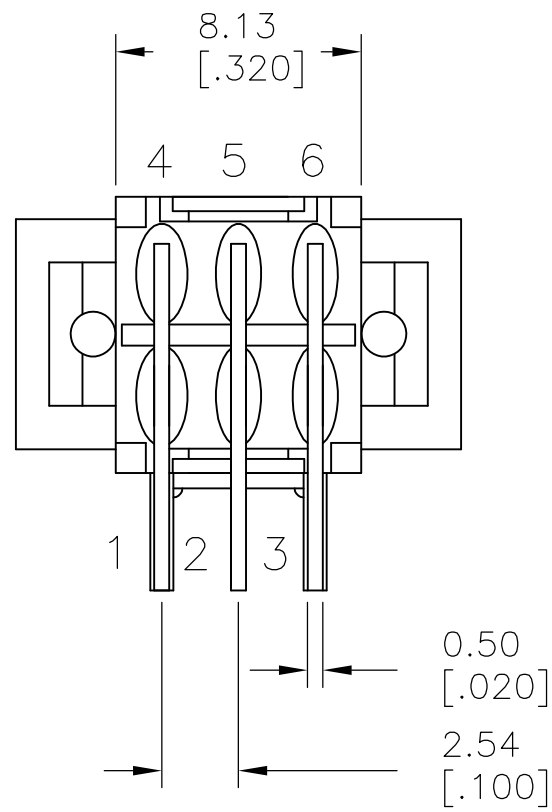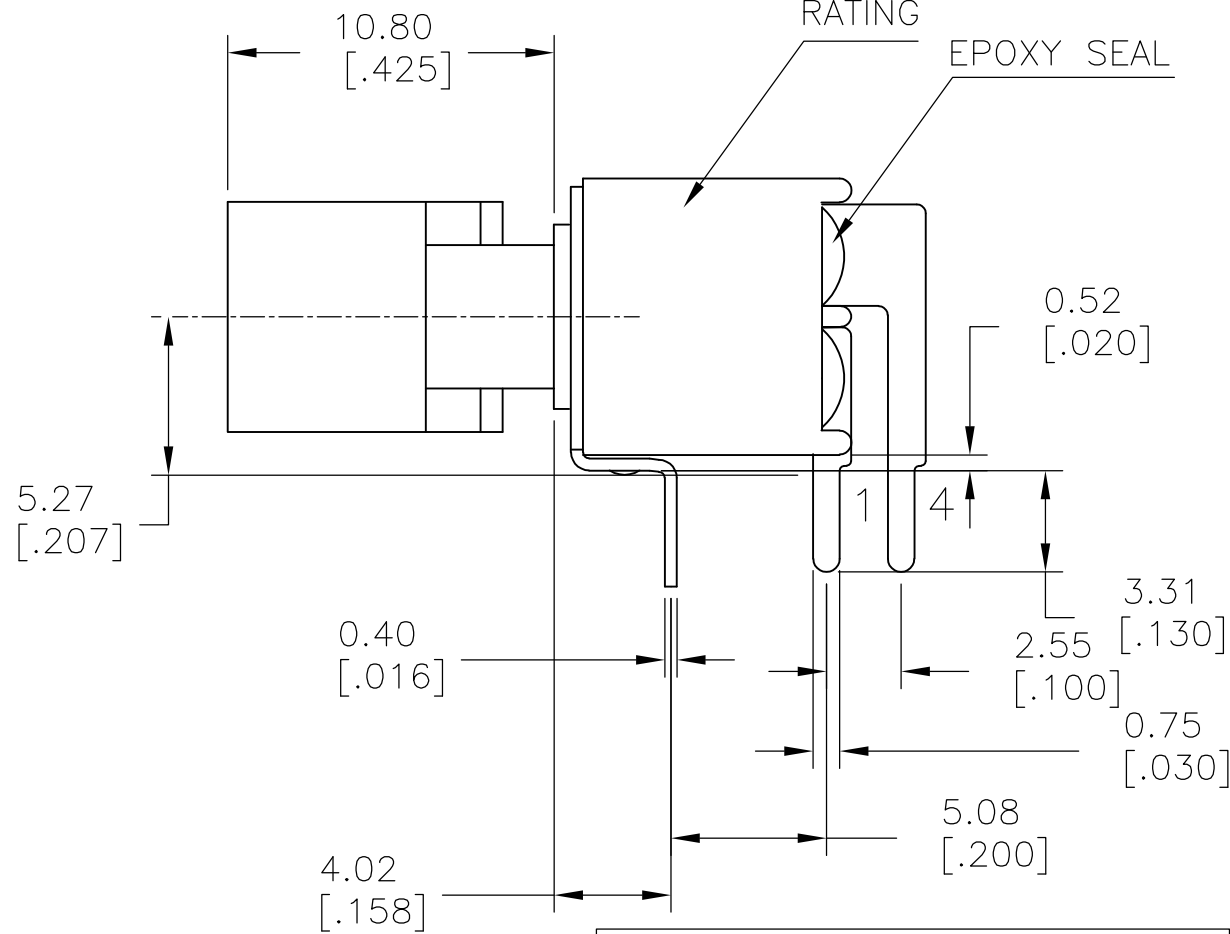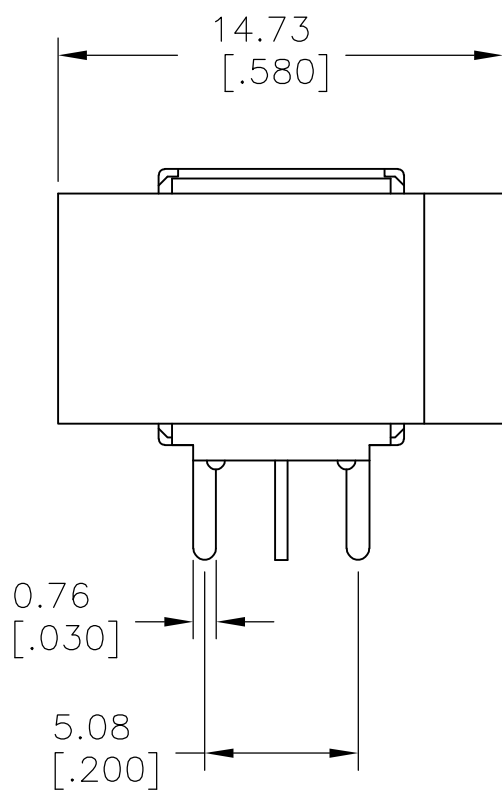



P.C. MOUNTING

DPDT M6



RIGHT ANGLE

LAYOUT FOR PN 2267087-3 & 4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
		APVD HILL, RYAN 11JUL2014	NAME			
		PRODUCT SPEC	SUBMINIATURE ROCKER SWITCHES			
MATERIAL		FINISH	WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=2267087
				SCALE 3:1	SHEET 3 of 5	REV A
			CUSTOMER DRAWING			

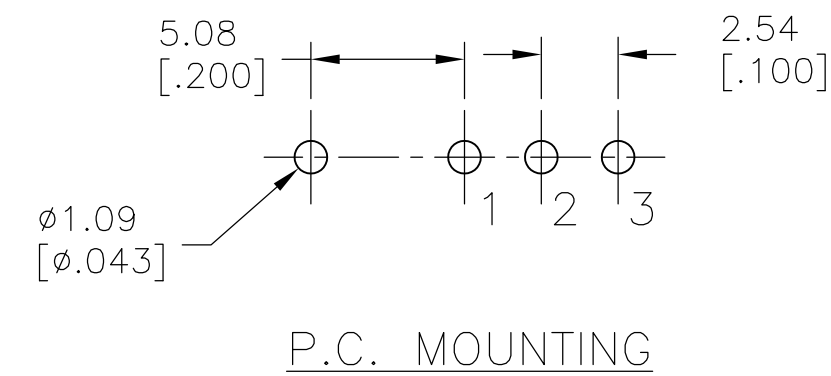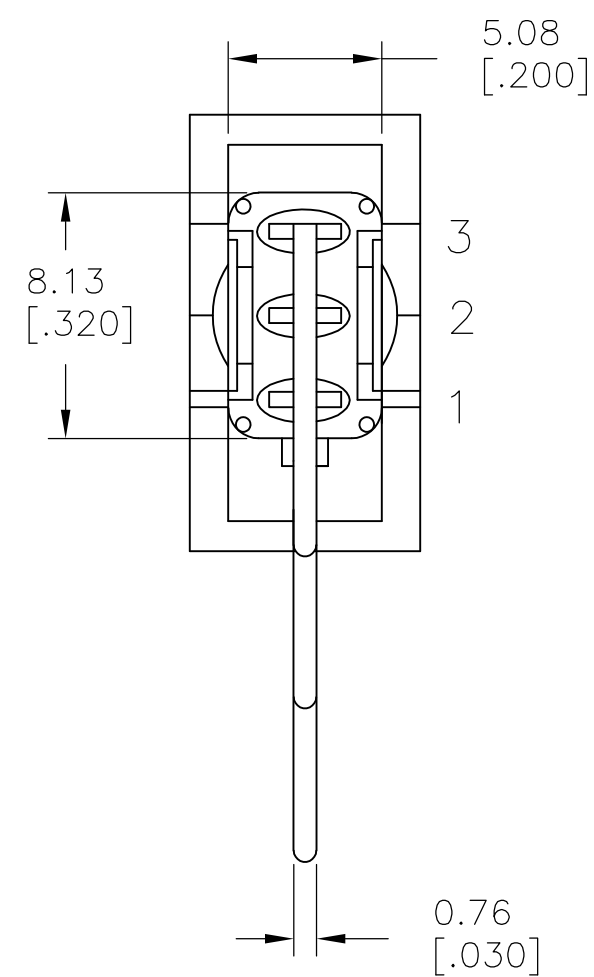

VERTICAL
RIGHT ANGLE


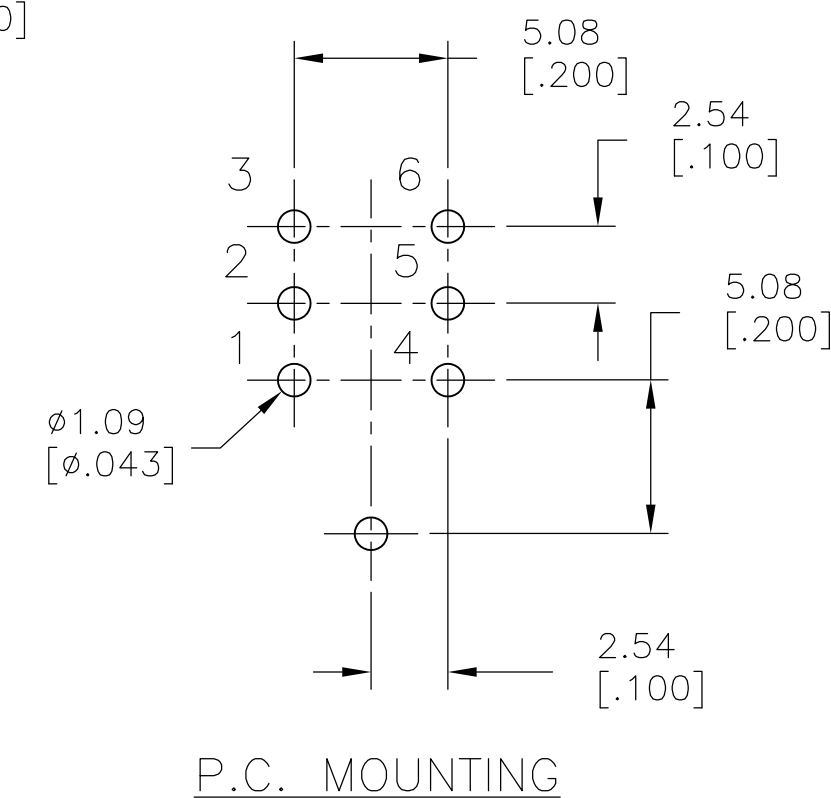
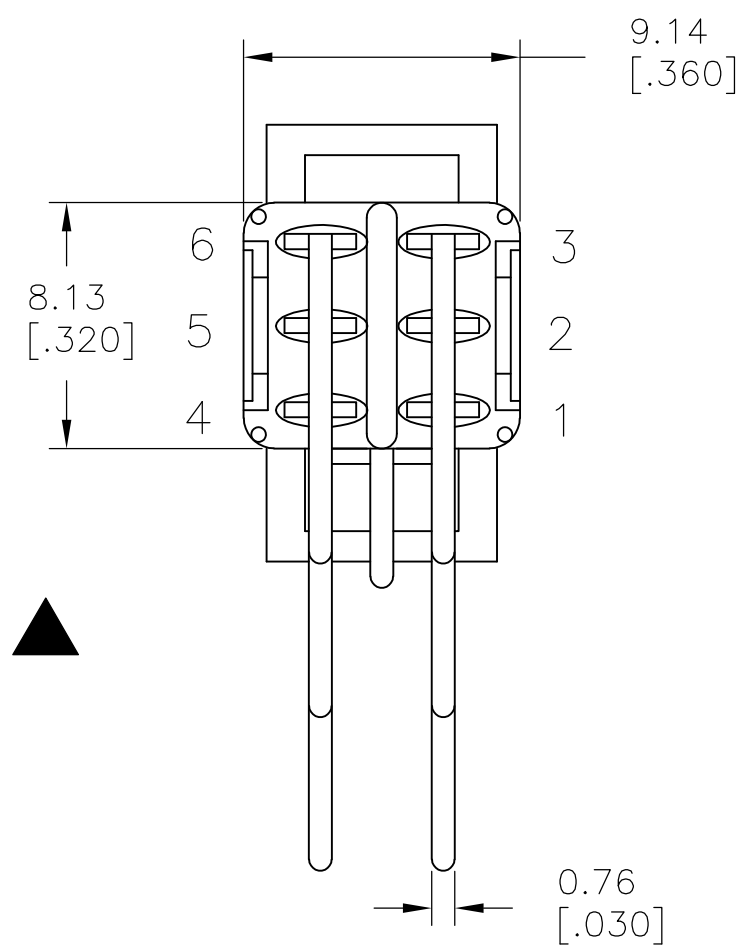


VERTICAL
RIGHT ANGLE

LAYOUT FOR PN 2267087-5 & 6

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
-	-	-	-	SEE SHEET 1	-	-

D

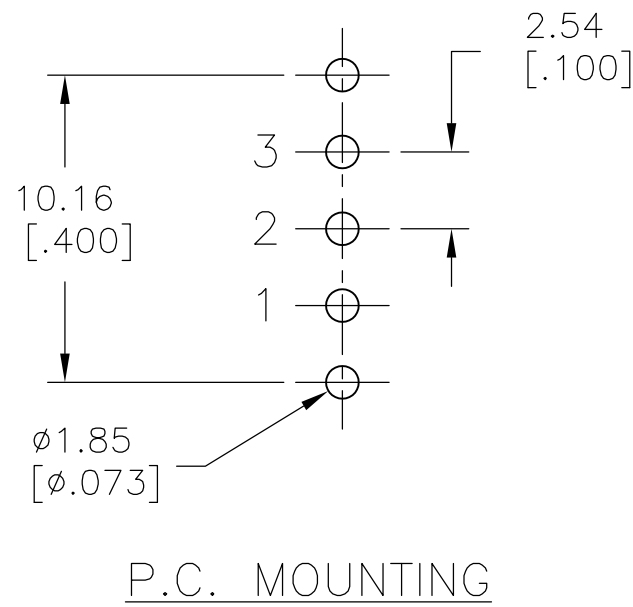
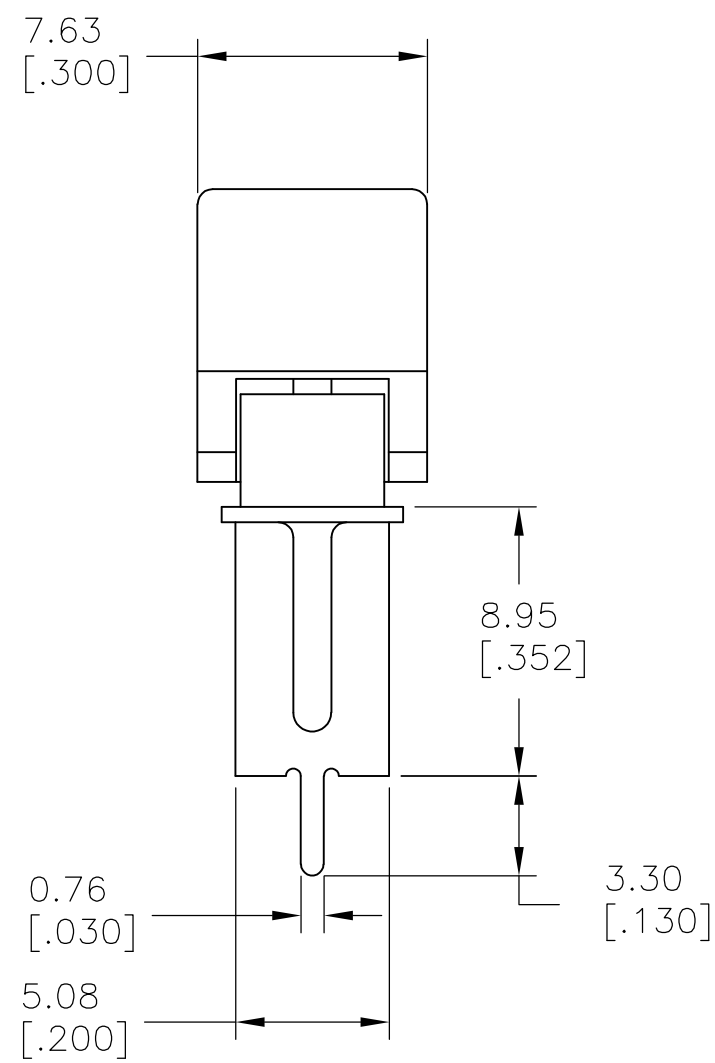
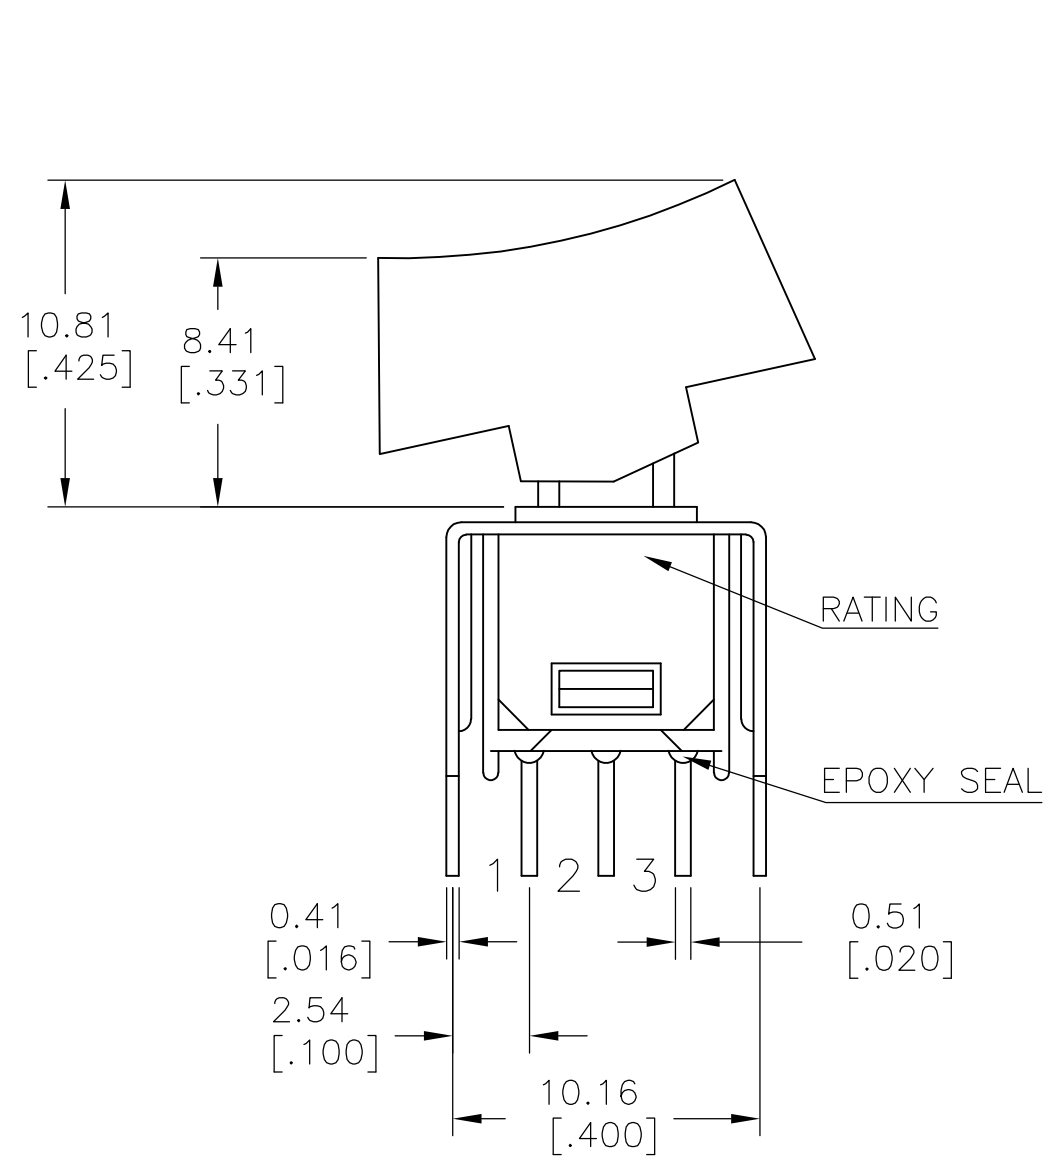


SPDT VS2

VERTICAL V-BRACKET

C

B

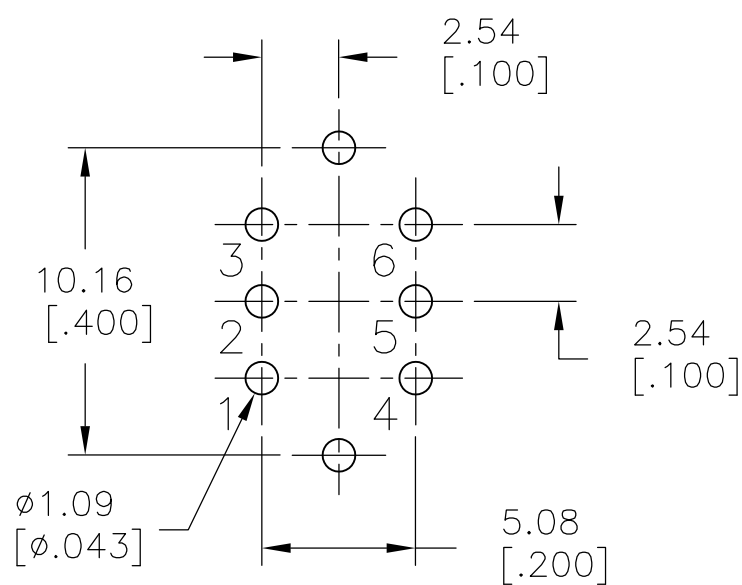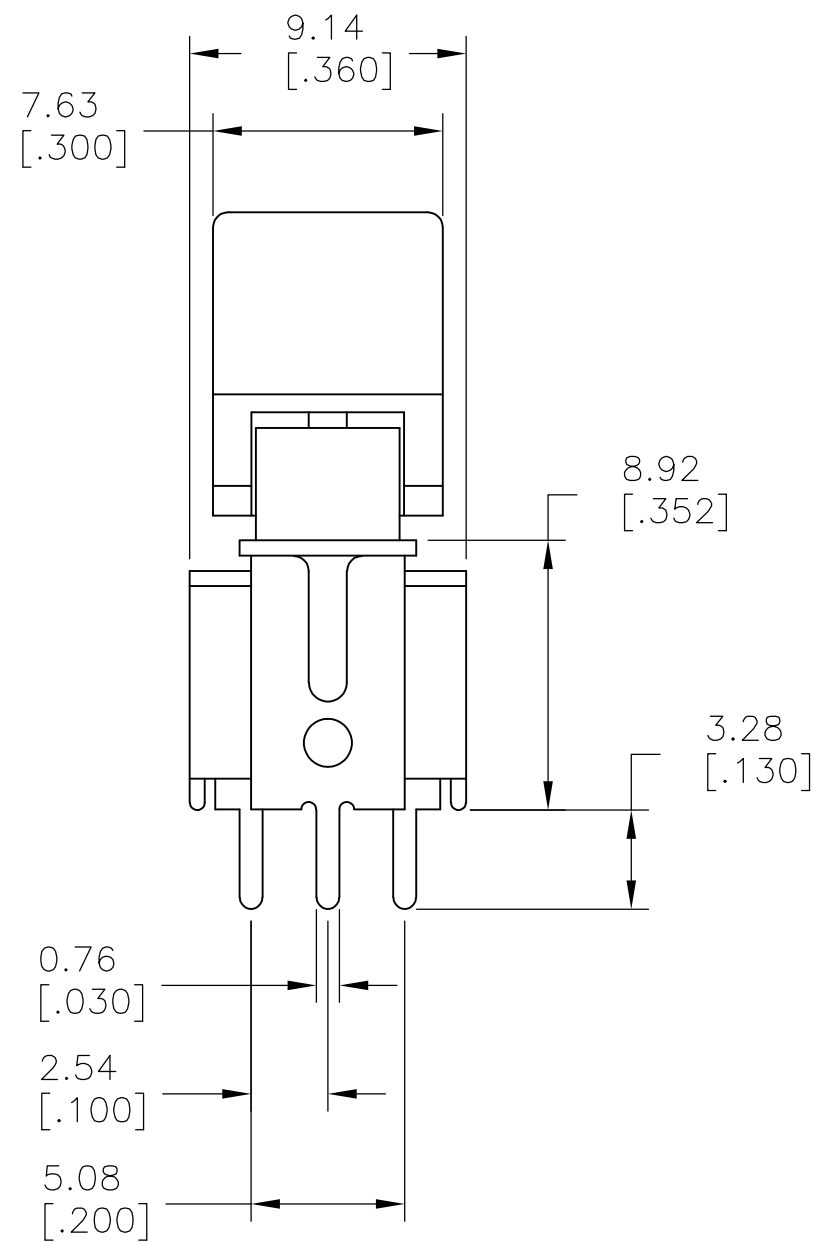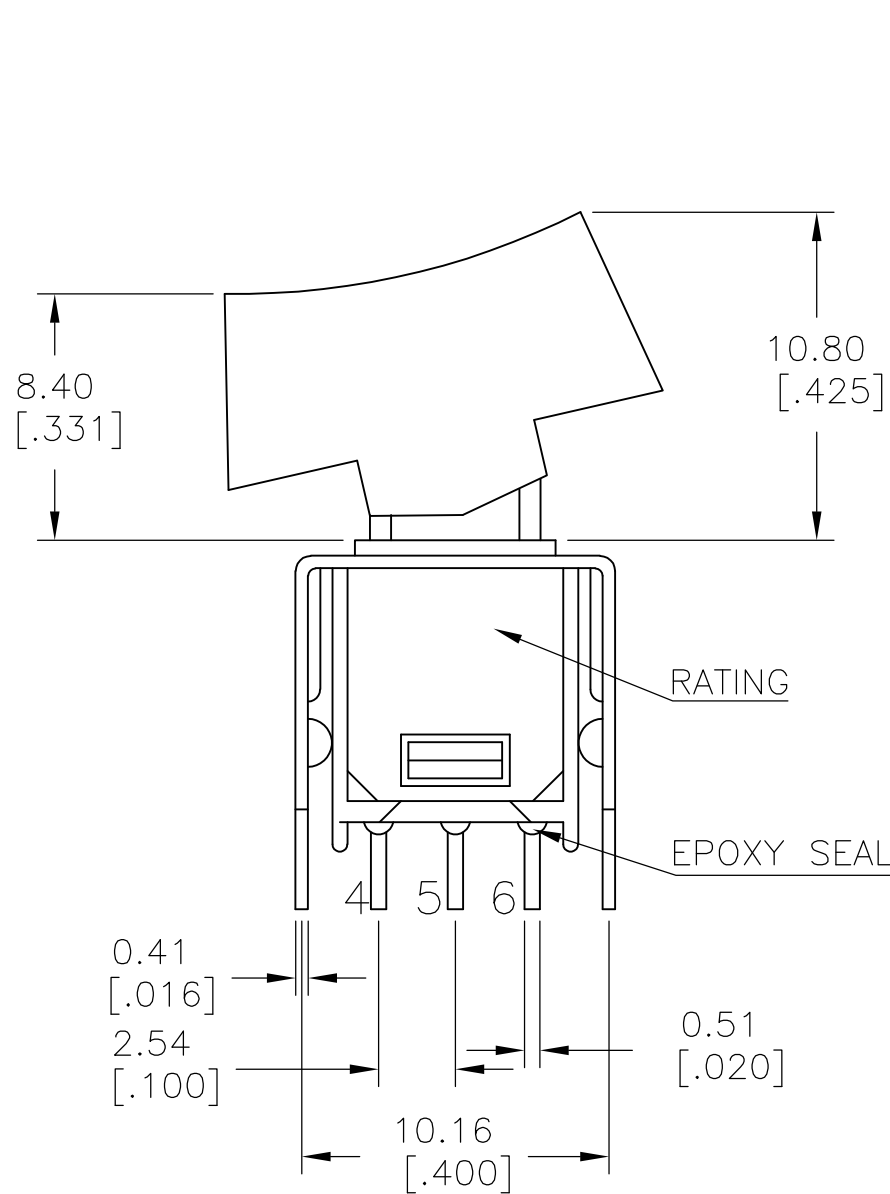

DPDT VS2

VERTICAL V-BRACKET

A

LAYOUT FOR PN 2267087-7 & 8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
		APVD HILL, RYAN 11JUL2014	NAME			
		PRODUCT SPEC	SUBMINIATURE ROCKER SWITCHES			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE			
0 PLC ± -		—	CAGE CODE			
1 PLC ± 0.38 [.015]		—	DRAWING NO			
2 PLC ± 0.25 [.010]		—	RESTRICTED TO			
3 PLC ± -		—	A2 00779 C=2267087			
4 PLC ± -		—	SCALE			
ANGLES ± 5°		—	3:1			
FINISH		—	SHEET			
—		—	5 of 5			
—		—	REV			
—		—	A			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9