


## 10A, 200V - 600V High Current Density Switchmode Superfast Surface Mount Rectifiers

### FEATURES

- Very low profile, typical height of 1.1mm
- 175°C operating junction temperature
- Glass passivated chip junction
- Low conduction loss
- Low leakage current
- High forward surge capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition

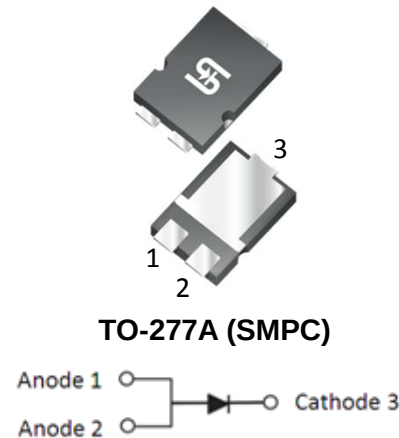

### TYPICAL APPLICATIONS

The devices were designed with a priority on  $V_F$  to minimize the conduction losses as secondary rectification of SMPS, while the diodes remain fast enough to fit applications where the switching frequency is counted in tens of kilohertz. The miniature high power density surface mount packages is perfect for space constraint design.

### MECHANICAL DATA

**Case:** TO-277A (SMPC)

Molding compound, UL flammability classification rating 94V-0

Moisture sensitivity level: level 1, per J-STD-020

Packing code with suffix "G" means green compound (halogen-free)

**Terminal:** Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test

**Polarity:** Indicated by cathode band

**Weight:** 0.095 g (approximately)

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted) |                       |                    |         |         |         |      |
|----------------------------------------------------------------------------------------------|-----------------------|--------------------|---------|---------|---------|------|
| PARAMETER                                                                                    |                       | SYMBOL             | TPMR10D | TPMR10G | TPMR10J | UNIT |
| Marking code                                                                                 |                       |                    | MR10D   | MR10G   | MR10J   |      |
| Maximum repetitive peak reverse voltage                                                      |                       | V <sub>RRM</sub>   | 200     | 400     | 600     | V    |
| Maximum average forward rectified current                                                    |                       | I <sub>F(AV)</sub> | 10      |         |         | A    |
| Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load          |                       | I <sub>FSM</sub>   | 150     |         |         | A    |
| Maximum instantaneous forward voltage <sup>(1)</sup><br>@ 10 A                               | T <sub>J</sub> =25°C  | V <sub>F</sub>     | 0.95    | 1.20    | 1.80    | V    |
|                                                                                              | T <sub>J</sub> =125°C |                    | 0.86    | 1.00    | -       |      |
| Maximum reverse current @ rated V <sub>R</sub> T <sub>J</sub> =25°C<br>                      |                       |                    |         |         |         |      |

Note 1: Pulse test with  $PW=300\mu\text{s}$ , 1% duty cycle

Note 2: Mounted on FR4 PCB with 16mm x 16mm Cu pad area

Note 3: Free air, mounted on recommended pad

Note 4: Measured at 1 MHz and Applied  $V_R=4.0$  Volts

| ORDERING INFORMATION   |              |                     |         |                         |
|------------------------|--------------|---------------------|---------|-------------------------|
| PART NO.               | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING                 |
| TPMR10x<br>(Note 1, 2) | S1           | G                   | SMPC    | 1,500/ 7" Plastic reel  |
|                        | S2           |                     | SMPC    | 6,000/ 13" Plastic reel |

Note 1: "X" defines voltage from 200V (TPMR10D) to 600V (TPMR10J)

Note 2: Whole series with green compound (halogen-free)

| EXAMPLE            |          |              |                     |                |
|--------------------|----------|--------------|---------------------|----------------|
| PREFERRED PART NO. | PART NO. | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION    |
| TPMR10D S1G        | TPMR10D  | S1           | G                   | Green compound |

## RATINGS AND CHARACTERISTICS CURVES

( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

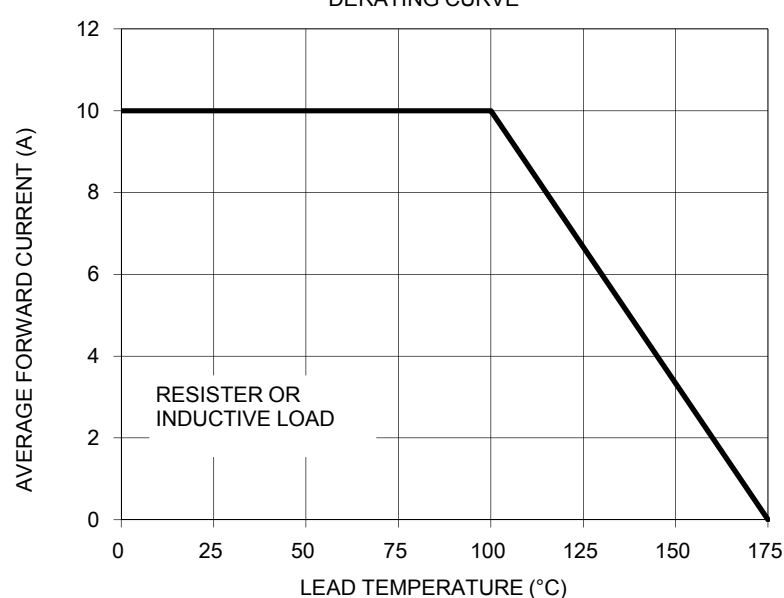


FIG. 2 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

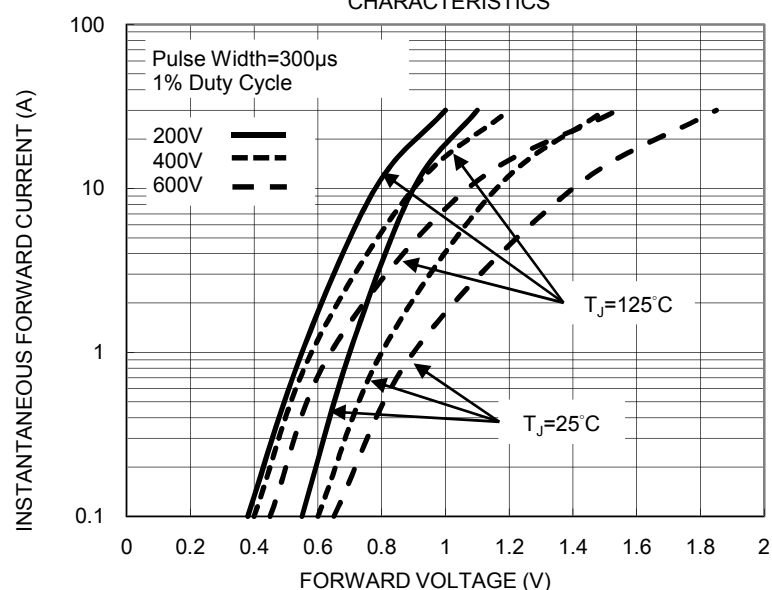


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD PEAK SURGE CURRENT

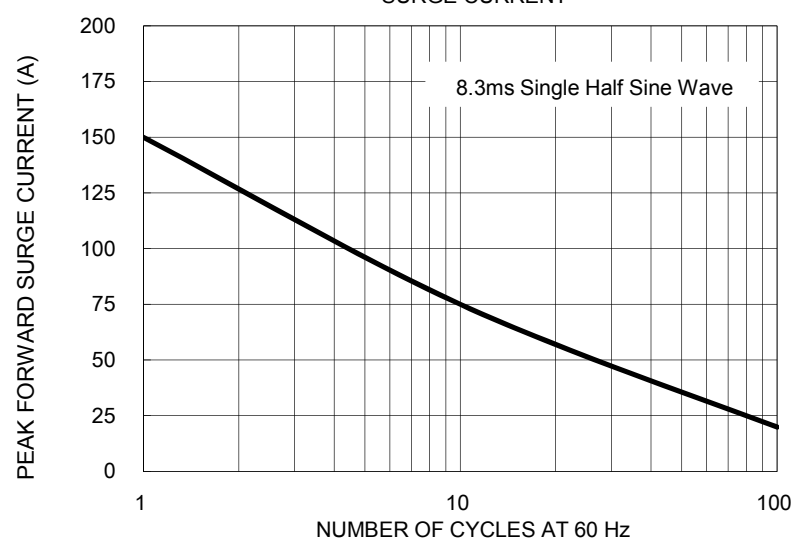


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

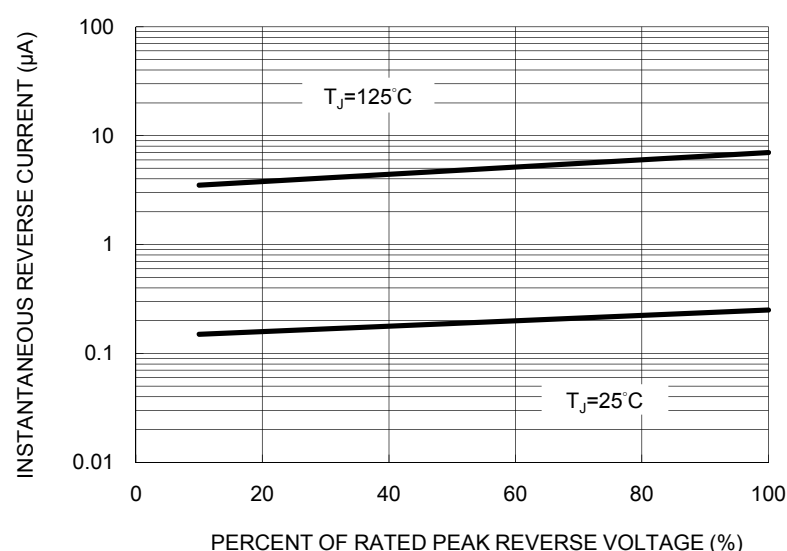


FIG. 5 TYPICAL JUNCTION CAPACITANCE



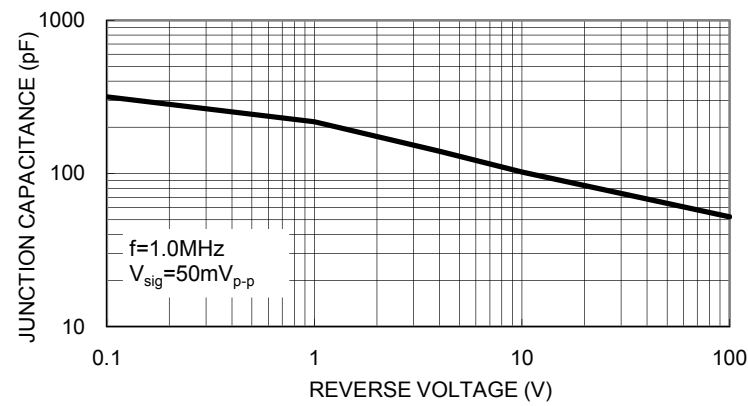


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

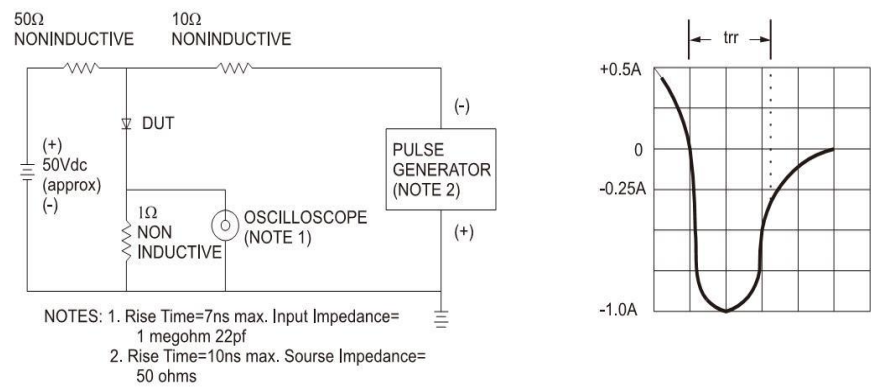


**PACKAGE OUTLINE DIMENSIONS**  
**TO-277A (SMPC)**

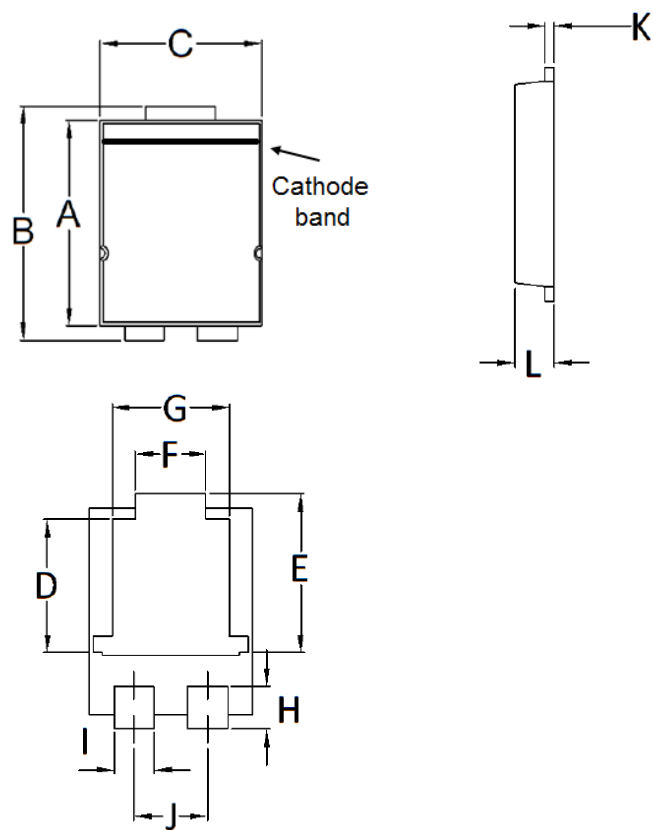


| DIM. | Unit (mm) |       | Unit (inch) |       |
|------|-----------|-------|-------------|-------|
|      | Min       | Max   | Min         | Max   |
| A    | 5.650     | 5.750 | 0.222       | 0.226 |
| B    | 6.350     | 6.650 | 0.250       | 0.262 |
| C    | 4.550     | 4.650 | 0.179       | 0.183 |
| D    | 3.540     | 3.840 | 0.139       | 0.151 |
| E    | 4.235     | 4.535 | 0.167       | 0.179 |
| F    | 1.850     | 2.150 | 0.073       | 0.085 |
| G    | 3.170     | 3.470 | 0.125       | 0.137 |
| H    | 1.043     | 1.343 | 0.041       | 0.053 |
| I    | 1.000     | 1.300 | 0.039       | 0.051 |
| J    | 1.930     | 2.230 | 0.076       | 0.088 |
| K    | 0.175     | 0.325 | 0.007       | 0.013 |
| L    | 1.000     | 1.200 | 0.039       | 0.047 |

**SUGGESTED PAD LAYOUT**



| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A      | 4.80      | 0.189       |
| B      | 4.72      | 0.186       |
| C      | 1.40      | 0.055       |
| D      | 1.27      | 0.050       |
| E      | 6.80      | 0.268       |
| F      | 1.04      | 0.041       |

**MARKING DIAGRAM**

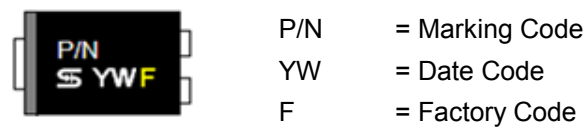

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9