



## Flexi-Mate™ 24 AWG cable assemblies maximise design flexibility, simplify wiring production and provide end-to-end space savings for LED panel-lighting applications

The Flexi-Mate™ family meets the Solid State Lighting (SSL) Industry's needs for flexibility and space savings in applications requiring placement of LEDs on interconnecting panels across the width of the display or lighting fixture. The low-profile, 3.00mm mated height, of the connectors does not interfere with the luminescence angle of PCB mounted LEDs, ensuring light uniformity of the finished panel.

Flexi-Mate 24 AWG cable assemblies are supplied pre-crimped in standard cable lengths, meeting the needs of lighting panel manufacturers who typically lack crimping capabilities. The system comprises board-to-board harnesses used to connect LED light panels and driver-to-board harnesses to connect LED panels to the main power board. A wire loop configuration can complete an open-loop signal. The cable assemblies mate with existing Flexi-Mate receptacles.

Key features of the compact, low-profile Flexi-Mate connectors include a dual-contact terminal design for secure electrical contact, space-saving positive side locks and mating guide features. Connectors meet IEC60838-2-2 requirements for LED modules. For additional information visit: [www.molex.com/link/fleximate.html](http://www.molex.com/link/fleximate.html)

### Features and Benefits

24 AWG cable assemblies in white	Cable gauge and colour support lighting market preferences
Flexible board-to-board, wire-to-board and cable-loop options	Meets needs of lighting designs that use interconnecting LED panels
Low-halogen materials	Meets lighting industry environmental regulations
3.00mm mated height and 3.70mm pitch	Compact, low profile system achieves space savings
Positive side latches on crimp housing	Space savings and easy mating/unmating
Dual-contact terminal design	Ensures reliable electrical connection
Headers designed with extended wall to ensure >3mm creepage distance	Meets UL approval requirements
Shrouded contacts	Protects contact area

### Applications

#### Lighting:

- LED panel-lighting applications
  - Downlight modules
  - Linear lights / lighting strips
  - Track lighting
  - Office lighting
  - Industrial lighting



LED office lighting




LED panel-lighting applications

## Flexi-Mate™ 24 AWG Cable Assemblies

Board-to-Board  
**68801-4593**  
**68801-4594**  
**68801-4595**

Wire Loop  
**68801-4596**

Driver-to-Board  
**68801-4645**  
**68801-4648**



Flexi-Mate™ 24 AWG Cable Assemblies

## Specifications

### REFERENCE INFORMATION: CABLE ASSEMBLIES

Packaging (cables): Bags  
 UL Approved: Yes  
 Mates With: Receptacle: 503471  
 (For low-halogen mating  
 receptacle – contact GPM)  
 Designed In: mm  
 RoHS: Yes  
 Low Halogen: Yes

### MECHANICAL

Durability (min.): 15 cycles

### PHYSICAL

Housing: PBT, White  
 Terminal: Copper Alloy  
 Plating:  
 Contact Area — Tin (Sn)  
 Operating Temperature:  
 -40 to +85°C

## Flexi-Mate™ 24 AWG Cable Assemblies


### ELECTRICAL

Voltage (max.): 500V  
 Current (max.): 2.0A  
 Contact Resistance: 40 milliohms max.  
 Dielectric Withstanding Voltage:  
 1500V AC min.  
 Insulation Resistance:  
 1000 Megaohms min.

### CABLE SPECIFICATIONS

AWG: 24  
 Jacket Material: MPPE  
 Conductor material:  
 Tinned Copper wire stranded  
 Colour: White

## Flexi-Mate 24 AWG cable assemblies

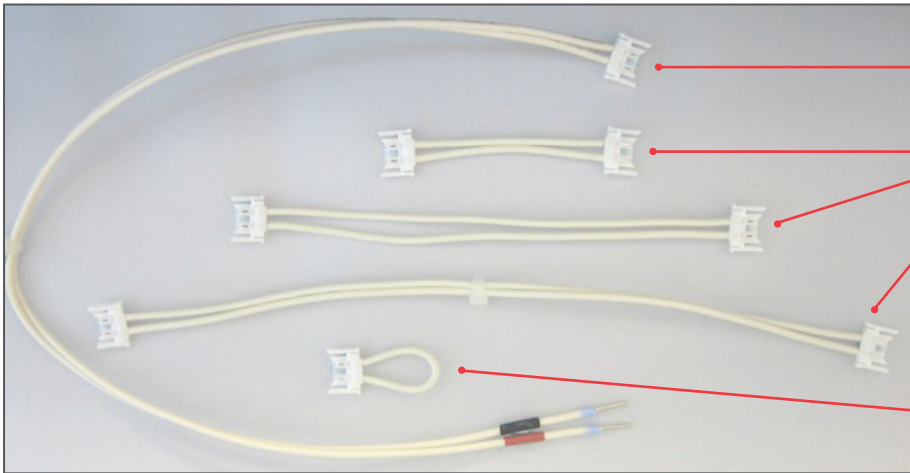

Driver-to-board  
 Flexi-Mate cable assemblies  
 68801-4645 / 68801-4648  
 (350 and 600mm lengths)

Board-to-board Flexi-Mate  
 cable assemblies  
 68801-4593 / 68801-4594 /  
 68801-4595  
 (46, 115 and 190mm lengths)

Flexi-Mate wire loop  
 68801-4596

## Ordering Information

Order No.	Configuration		Cable Length
68801-4593	Flexi-Mate to Flexi-Mate	Board-to-board	46mm
68801-4594			115mm
68801-4595			190mm
68801-4596	Flexi-Mate wire loop	-	-
68801-4645	Flexi-Mate to ferrule	Driver-to-board	350mm
68801-4648			600mm

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9