
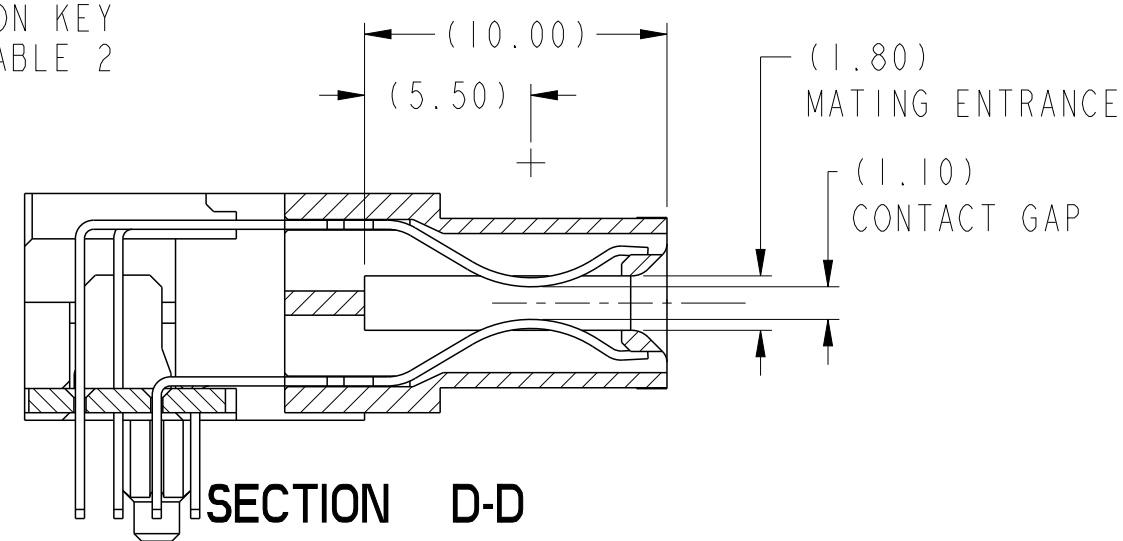
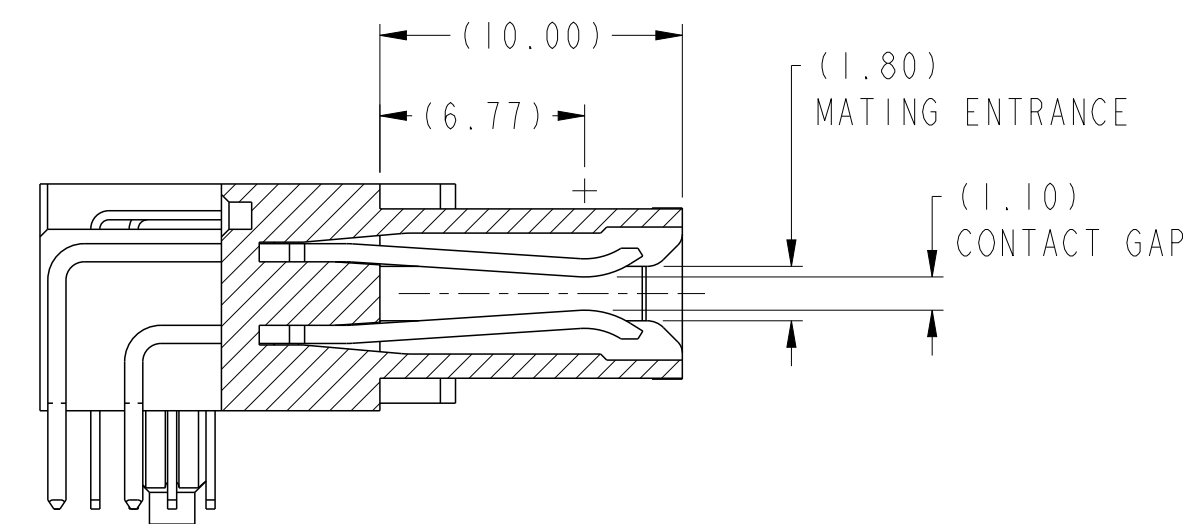
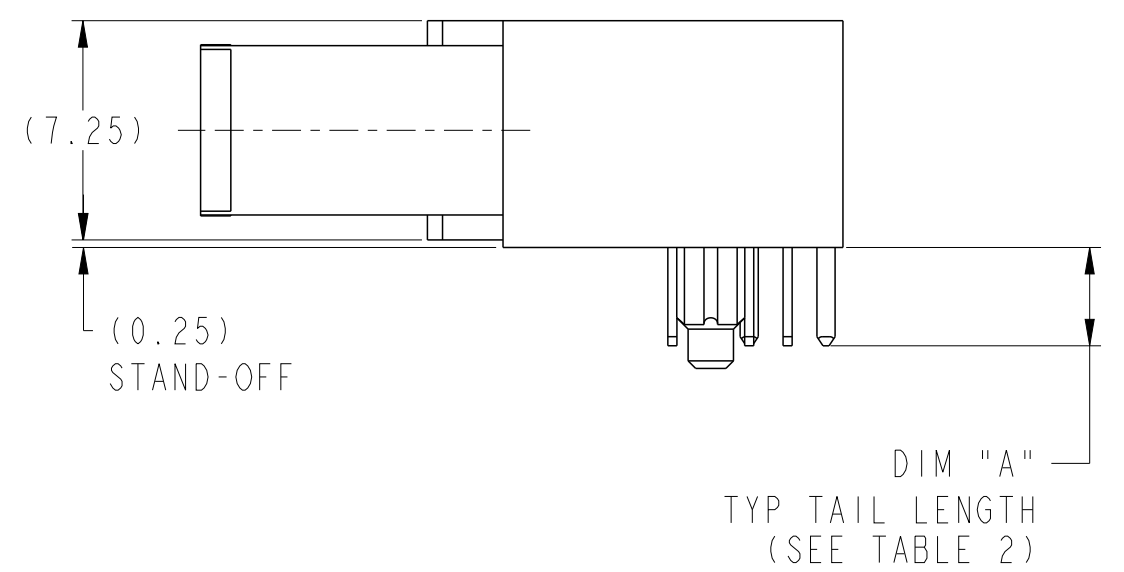
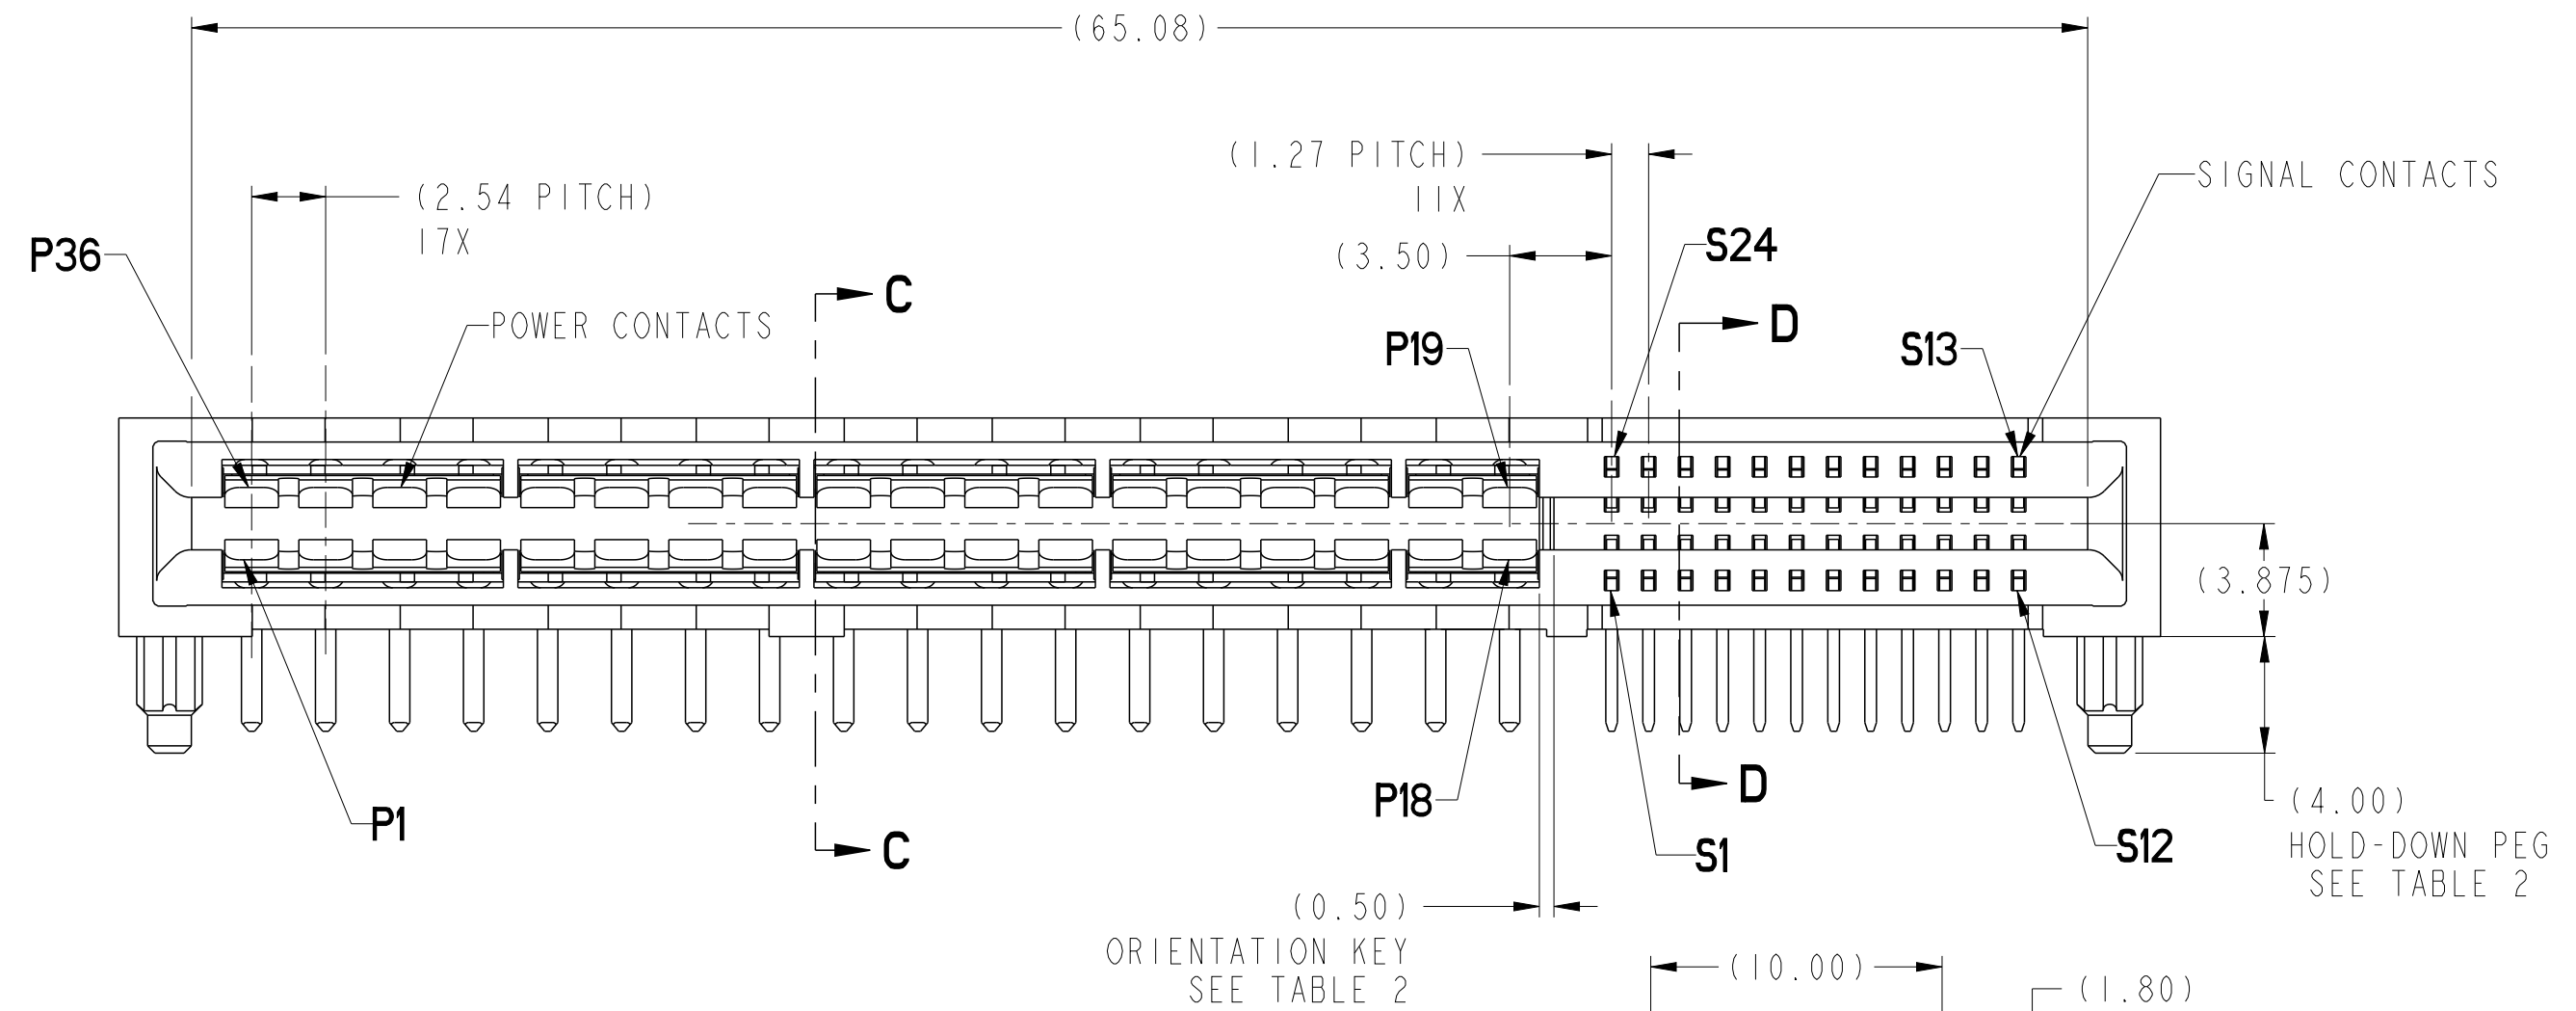
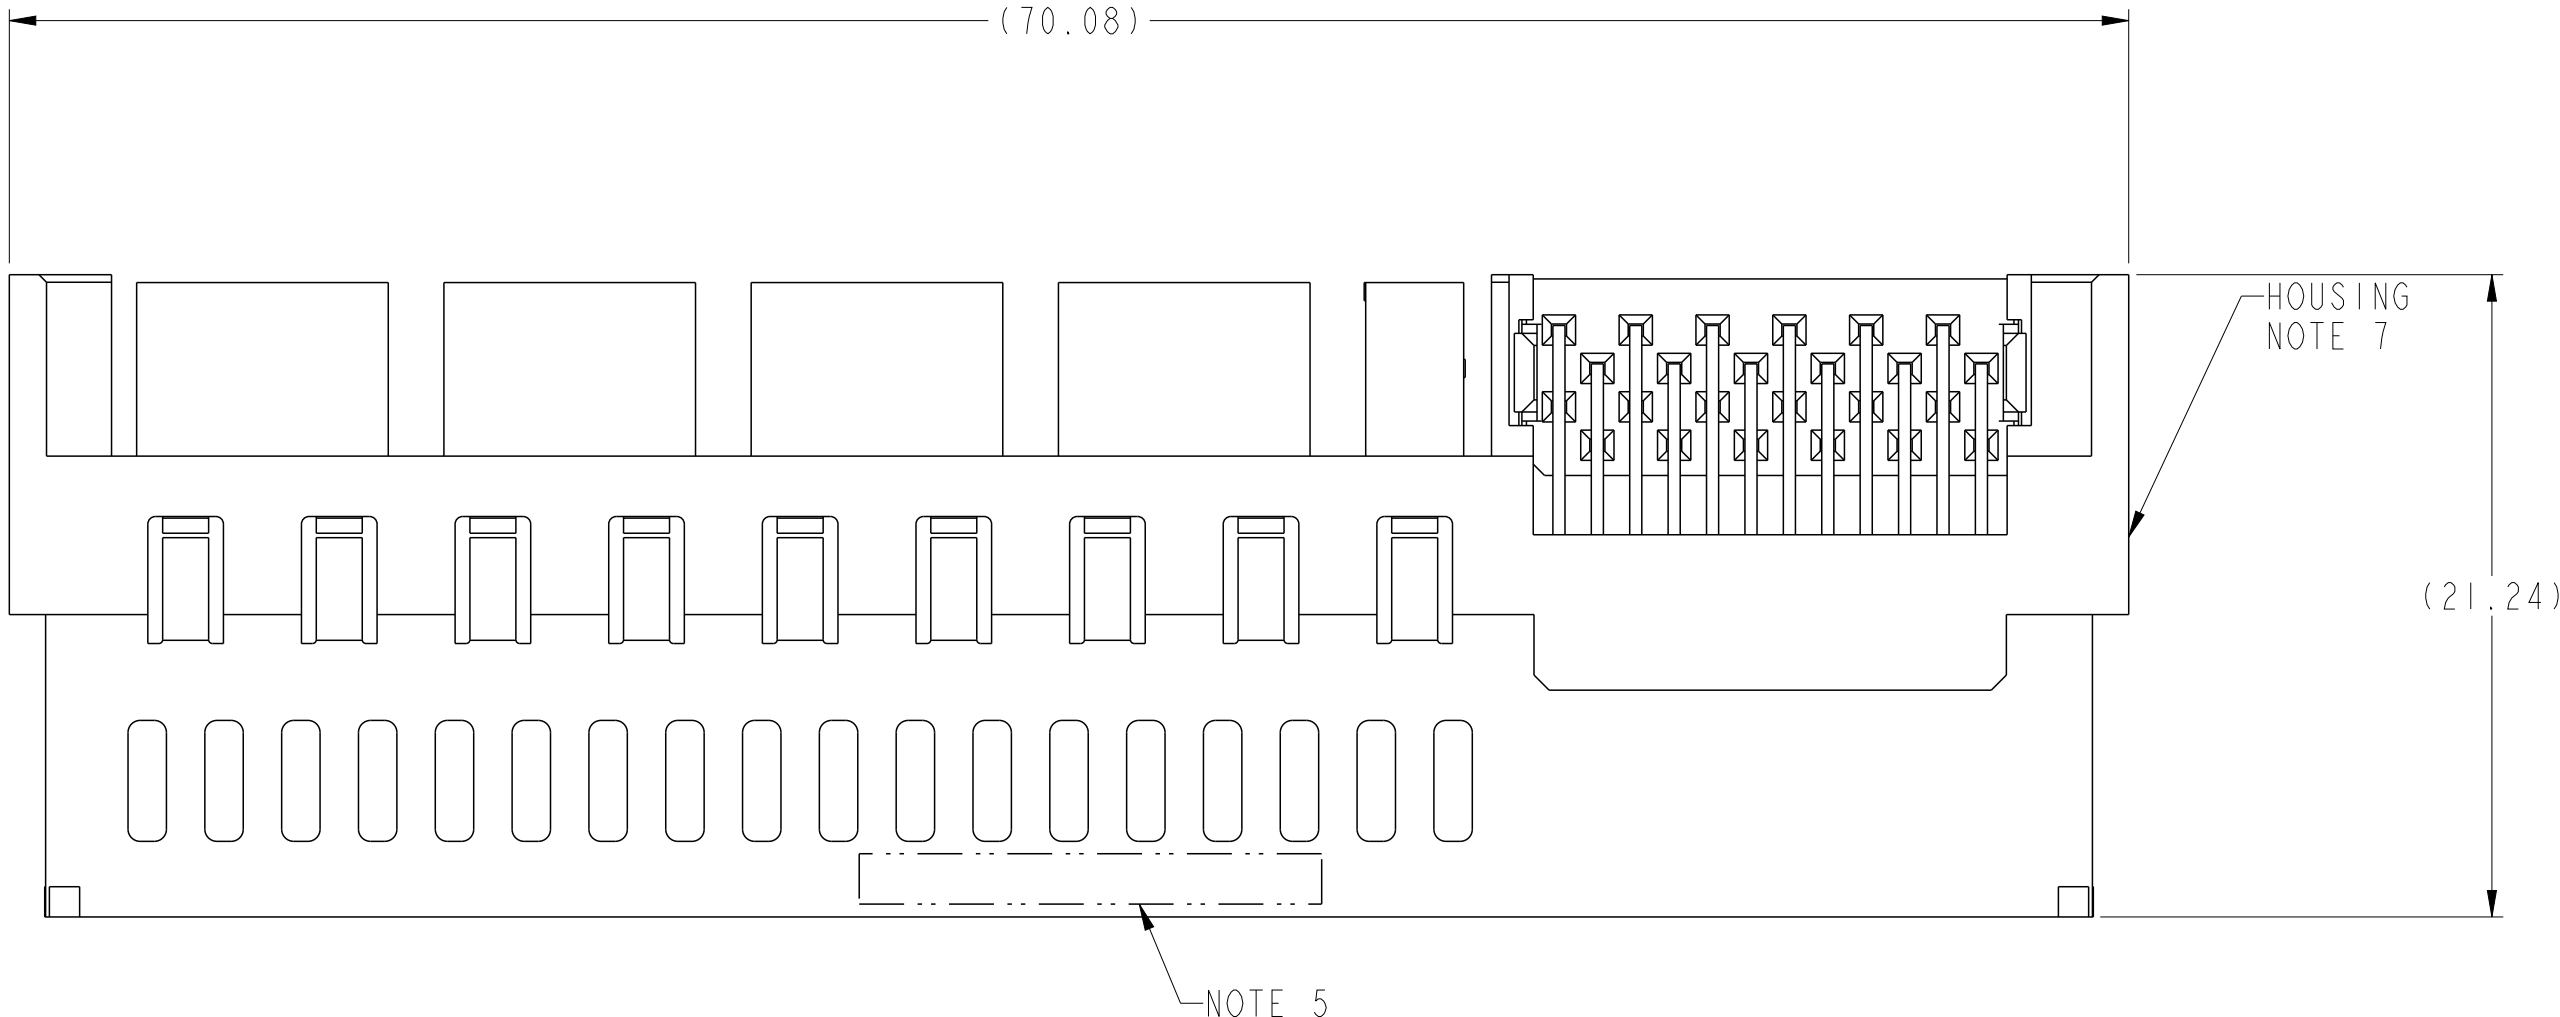






SECTION C-C

SECTION D-D

spec ref		-		dr		Chris Gieski		2010/08/27		projection				MM		size		A2		scale		4:1	
tolerance std		-		eng		De-Ming Lu		2014/06/05						ecn no		ELX-DG-17838-1		rel level		Released			
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-								-							
				appr		Pei-Ming Zheng		2014/06/05								product family				HPCE			
surface		✓		linear				title		R/A RECT (36P-24S)		dwg no		10115859		rev		D					
				0.X																±0.3			
				0.XX																±0.10			
ASME Y14.5				0.XXX		±0.050																	
				angular		0°		±°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 1 of 4					

Copyright FCI.
FCI

HPCE PART NUMBER (TABLE 2)				
PART NUMBER	TAIL TYPE	HOLD-DOWN OPTION	ORIENTATION KEY	DIM "A" TYPICAL TAIL LENGTH
10115859-001LF	SOLDER TAIL	NO	YES	3.25±0.25
10115859-002LF			NO	
10115859-003LF		YES	YES	
10115859-004LF			NO	
10115859-005LF		NO	YES	4.05±0.25
10115859-006LF			NO	
10115859-007LF		YES	YES	
10115859-008LF			NO	
10115859-009LF		NO	YES	4.85±0.25
10115859-010LF			NO	
10115859-011LF		YES	YES	
10115859-012LF			NO	
10115859-013LF		NO	YES	2.60±0.25
10115859-014LF			NO	
10115859-015LF		YES	YES	
10115859-016LF			NO	

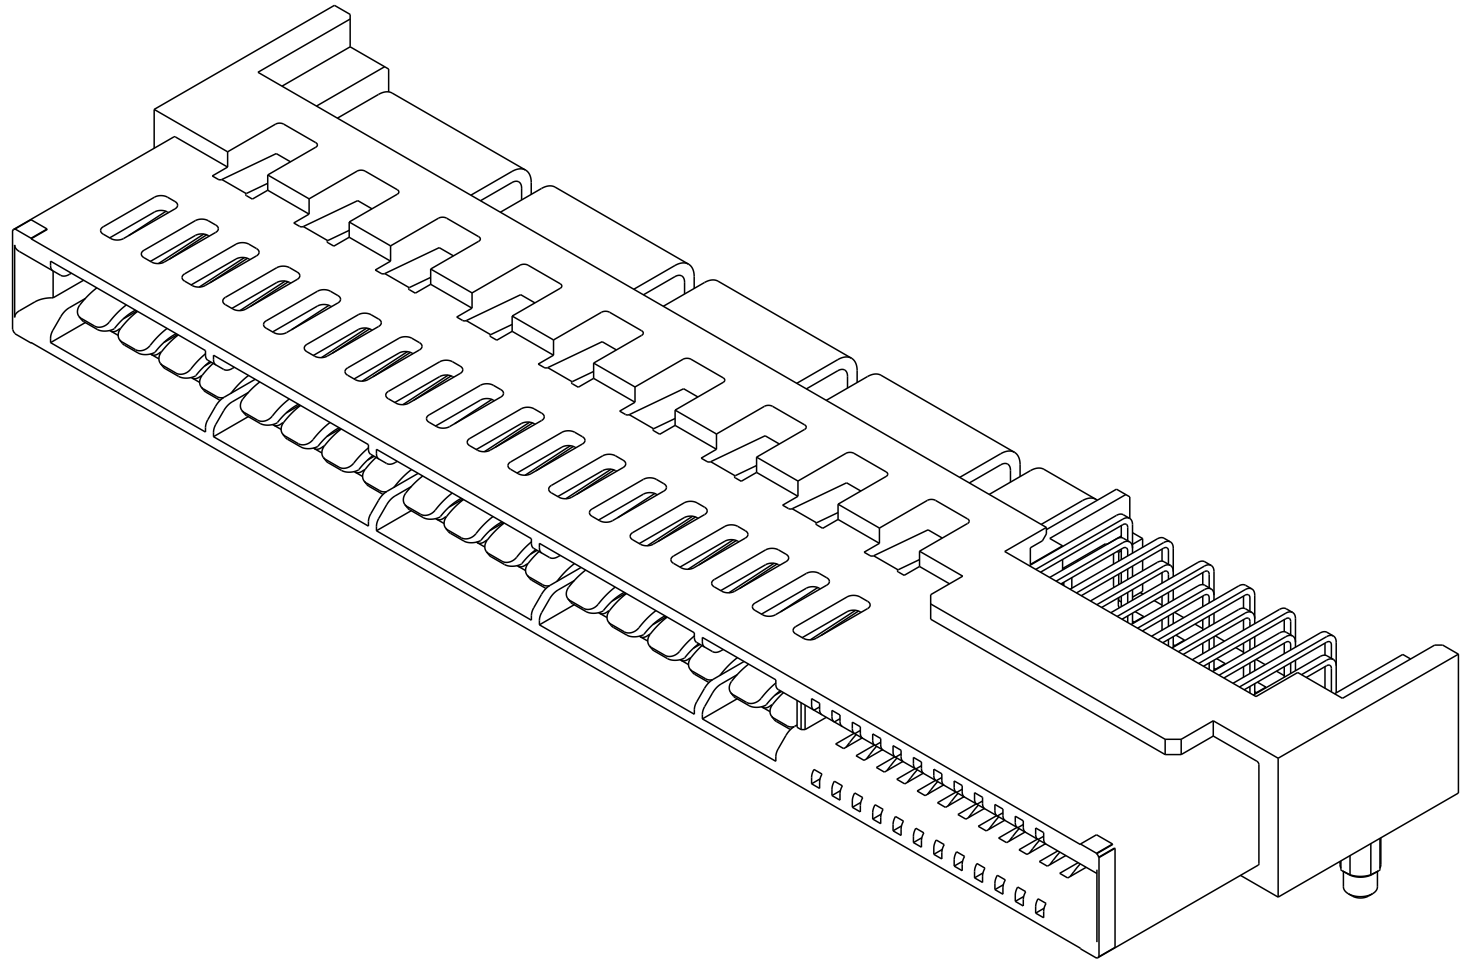


NOTES:

1. CONNECTOR MATERIALS:

HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT

CONTACTS: HIGH PERFORMANCE COPPER ALLOY.
2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.
3. PRODUCT SPECIFICATION: GS-12-604.
4. APPLICATION SPECIFICATION: GS-20-128.
5. PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.
6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.
7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
8. COPPER PLATING THICKNESS IN CENTER OF VIA-HOLE CAN BE NO MORE THAN 0.003 LESS THAN OTHER AREAS.
9. ALL HOLE SIZES ARE FINISHED HOLE SIZES.
10. MOUNTING HOLES ARE UNPLATED
Ø 2.10 +/- 0.1 FOR SOLDER TAILS
11. A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref -		dr Chris Gieski		2010/08/27				size A2	scale 4:1
tolerance std -	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng De-Ming Lu		2014/06/05				ecn no ELX-DG-17838-1	rel level Released
ASME Y14.5		chr -		-					
		appr Pei-Ming Zheng		2014/06/05					
surface 		linear	0.X	±0.3		title R/A RECT (36P-24S) HIGH POWER CARD EDGE	dwg no 10115859	rev D	
	0.XX		±0.10						
	0.XXX		±0.050						
ASME Y14.5	angular	0°	±0°	www.fci.com	cat. no. -	Product - Customer Drw		sheet 4 of 4	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9