

Inductors for Power Circuits

Wound/STD • magnetic shielded

SPM series

Type: **SPM3012 (3.2x3.0 mm)**
SPM4012 (4.4x4.1 mm)
SPM5012 (5.4x5.1 mm)
SPM5030 (5.2x5.0 mm)
SPM6530 (7.1x6.5 mm)

Issue date: November 2012

- All specifications are subject to change without notice.
- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM3012

The SPM3012 is a large-current SMD power inductor that uses a magnetic metal material. In addition to the conventional SPM6530 and SPM5030 products, the SPM Series now includes this 3x 3.2mm product with a maximum height of 1.2mm.

FEATURES

- Small and low profile design.
- Size: 3.2x3.0mm.
- Height: 1.2mm max.
- Uses a magnetic metal material with a high magnetic flux density.
- Has a high curie temperature, which ensures a wide operating temperature range.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Cellular phones, note book type computers, etc.

PRODUCT IDENTIFICATION

SPM	3012	T	1R0	M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions LxH

3012	3.0x1.2mm max.
------	----------------

(3) Packaging style

T	Embossed carrier tape
---	-----------------------

(4) Inductance value

1R0	1.0 μ H
-----	-------------


(5) Inductance tolerance

M	$\pm 20\%$
---	------------

PACKAGING STYLE AND QUANTITIES


Packaging style	Quantity
Taping	2000 pieces/reel

SHAPES AND DIMENSIONS

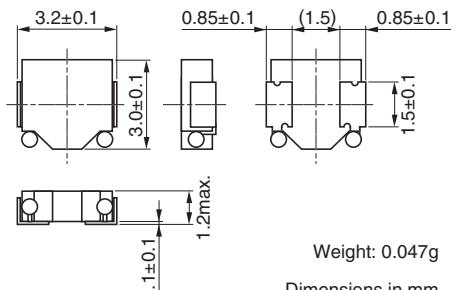

Weight: 0.047g
Dimensions in mm

RECOMMENDED PC BOARD PATTERN

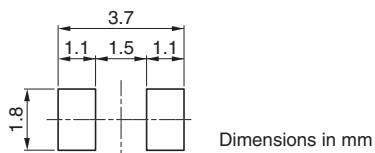


Dimensions in mm

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION

REFLOW SOLDERING

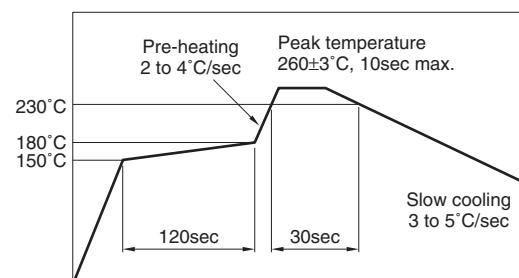

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following: The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m Ω)		Rated current(A)*		
				max.	typ.	Based on inductance change max.	typ.	Based on temperature rise typ.
SPM3012T-1R0M	1.0	± 20	100	65	57	3.4	5.4	2.8
SPM3012T-1R5M	1.5	± 20	100	90	77	2.8	4.7	2.5
SPM3012T-2R2M	2.2	± 20	100	115	100	2.5	3.4	2.2
SPM3012T-3R3M	3.3	± 20	100	210	183	1.8	2.8	1.5


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM3012T-1R0M

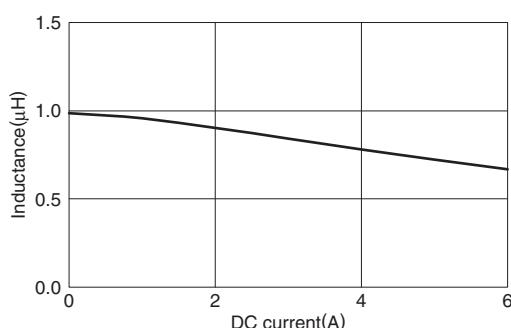


SPM3012T-1R5M

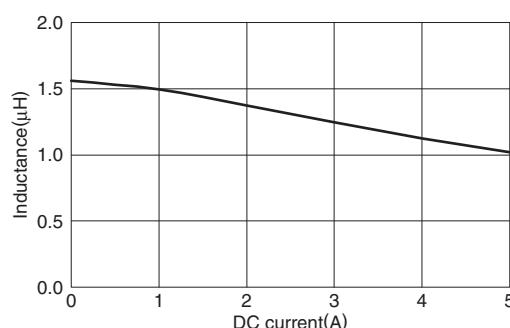


SPM3012T-2R2M

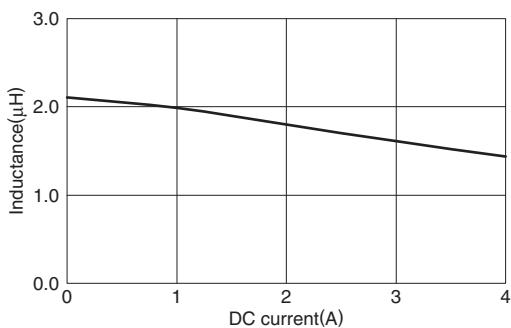

SPM3012T-3R3M

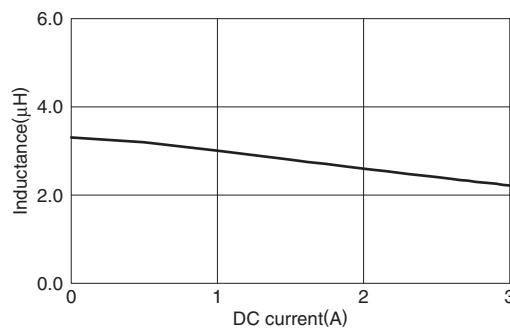


TEST CIRCUIT

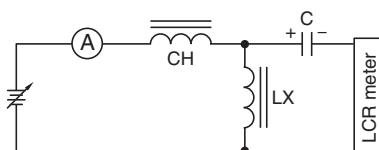


PACKAGING STYLES

REEL DIMENSIONS

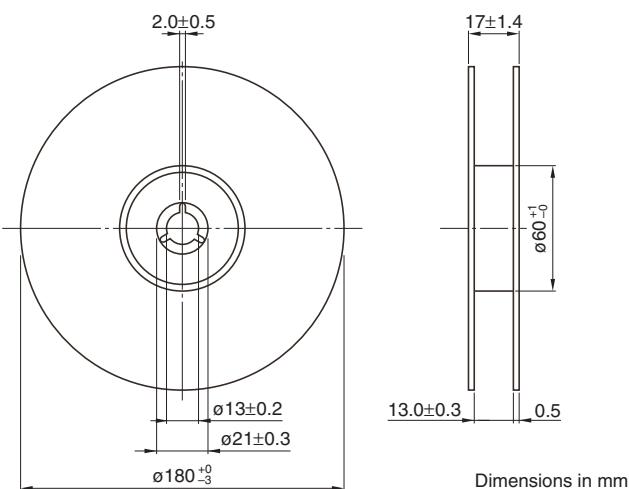

Dimensions in mm

TAPE DIMENSIONS

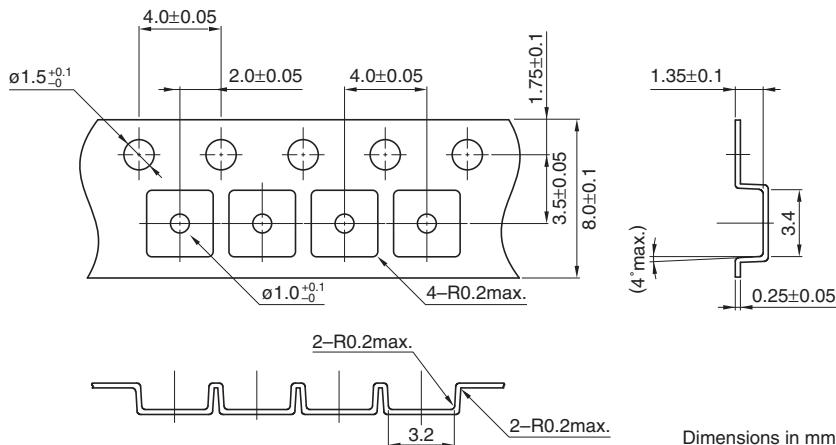

Dimensions in mm

- All specifications are subject to change without notice.

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM4012

The SPM4012 is a large-current SMD power inductor that uses a magnetic metal material. In addition to the conventional SPM3012 products, the SPM Series now includes this 4mm square product with a maximum height of 1.2mm.

FEATURES

- Small and low profile design.
- Size: 4.4×4.1mm.
- Height: 1.2mm max.
- Uses a magnetic metal material with a high magnetic flux density.
- Has a high curie temperature, which ensures a wide operating temperature range.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Cellular phones, note book type computers, etc.

PRODUCT IDENTIFICATION

SPM	4012	T	1R0	M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions L×H

4012	4.0×1.2mm max.
------	----------------

(3) Packaging style

T	Embossed carrier tape
---	-----------------------

(4) Inductance value

1R0	1.0 μ H
-----	-------------


(5) Inductance tolerance

M	$\pm 20\%$
---	------------

PACKAGING STYLE AND QUANTITIES


Packaging style	Quantity
Taping	1000 pieces/reel

SHAPES AND DIMENSIONS

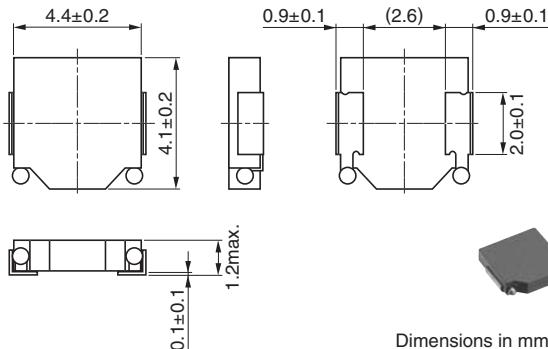

Dimensions in mm

RECOMMENDED PC BOARD PATTERN

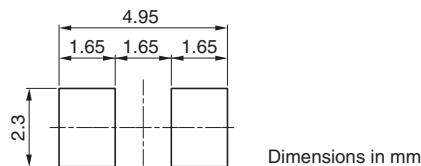


Dimensions in mm

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

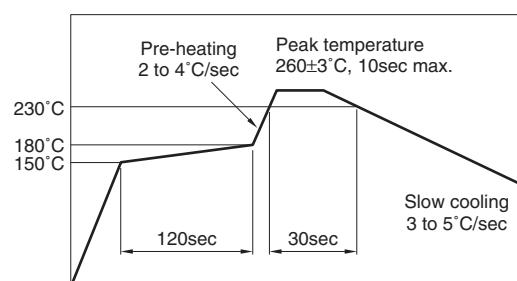

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.








- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following: The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m Ω)		Rated current(A)*		
				max.	typ.	Based on inductance change max.	typ.	Based on temperature rise typ.
SPM4012T-R47M	0.47	± 20	100	25	23	8.3	10.9	4.8
SPM4012T-1R0M	1.00	± 20	100	45	38	4.8	6.0	4.1
SPM4012T-1R5M	1.50	± 20	100	70	59	3.5	4.8	3.1
SPM4012T-2R2M	2.20	± 20	100	95	82	3.3	4.4	2.7
SPM4012T-3R3M	3.30	± 20	100	145	123	2.8	3.5	2.2
SPM4012T-4R7M	4.70	± 20	100	205	178	2.0	2.5	1.7

* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.


• Operating temperature range: -40 to +125°C (Including self-temperature rise)

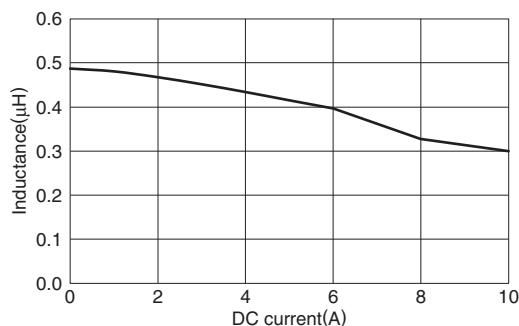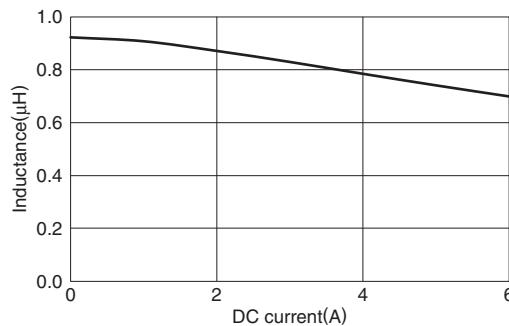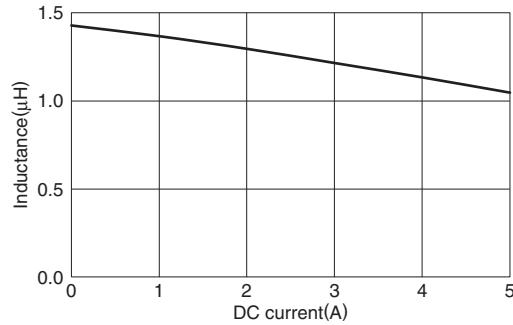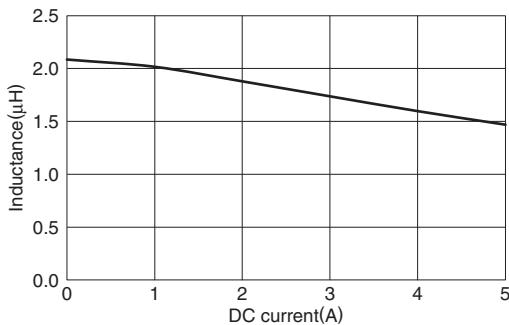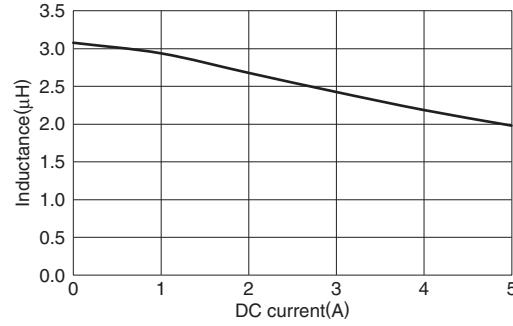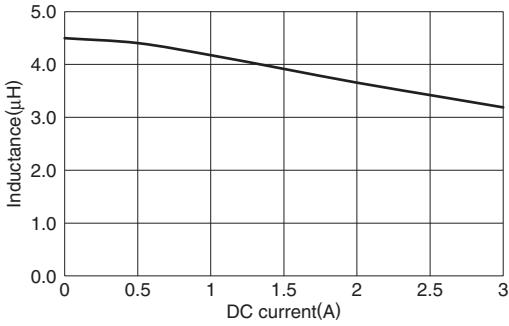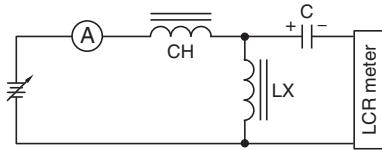TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS
SPM4012T-R47M

SPM4012T-1R0M

SPM4012T-1R5M

SPM4012T-2R2M

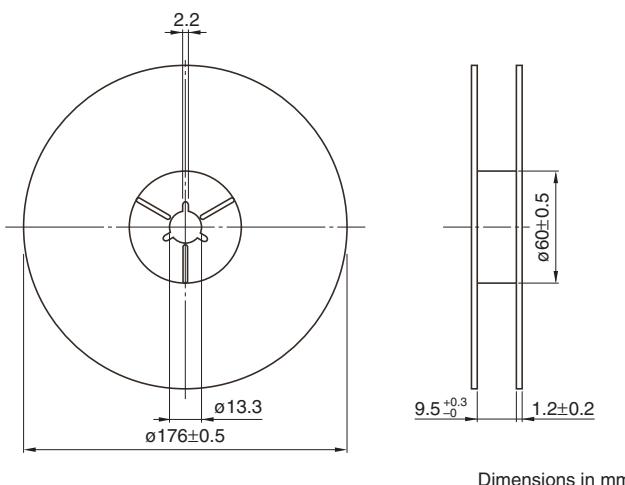SPM4012T-3R3M

SPM4012T-4R7M

TEST CIRCUIT


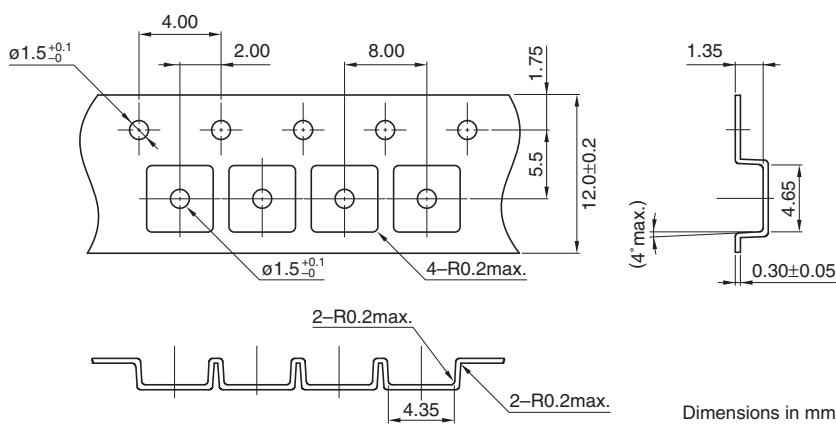
• All specifications are subject to change without notice.

PACKAGING STYLES

REEL DIMENSIONS



TAPE DIMENSIONS



Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM5012

The SPM5012 is a large-current SMD power inductor that uses a magnetic metal material. In addition to the conventional SPM3012 products, the SPM Series now includes this 5mm square product with a maximum height of 1.2mm.

FEATURES

- Small and low profile design.
Size: 5.4×5.1mm.
Height: 1.2mm max.
- Uses a magnetic metal material with a high magnetic flux density.
- Has a high curie temperature, which ensures a wide operating temperature range.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Cellular phones, note book type computers, etc.

PRODUCT IDENTIFICATION

SPM 5012 T - 1R0 - M
(1) (2) (3) (4) (5)

(1) Series name

(2) Dimensions L×H

5012 5.0×1.2mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

1R0 1.0 μ H


(5) Inductance tolerance

M $\pm 20\%$

PACKAGING STYLE AND QUANTITIES


Packaging style	Quantity
Taping	1000 pieces/reel

SHAPES AND DIMENSIONS

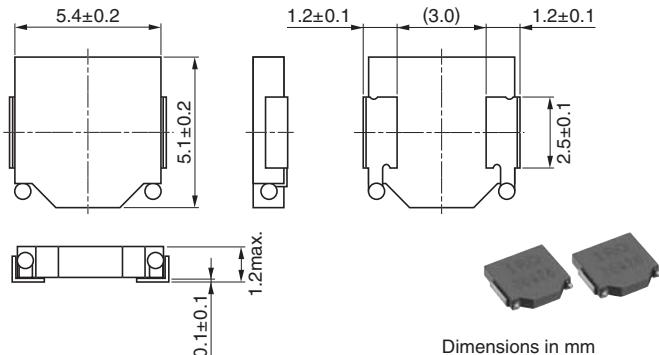

Dimensions in mm

RECOMMENDED PC BOARD PATTERN

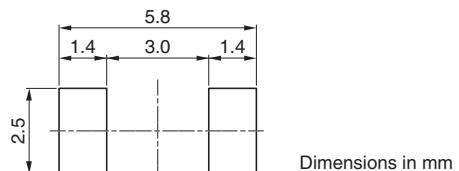


Dimensions in mm

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

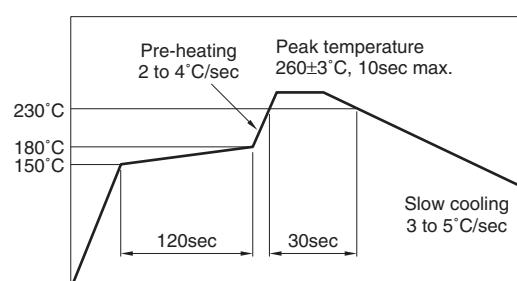

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface.
However, this does not affect performance.




- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m Ω)		Rated current(A)*		
				max.	typ.	Based on inductance change max.	typ.	Based on temperature rise typ.
SPM5012T-1R0M	1.00	± 20	100	44.0	40.0	6.3	7.9	4.1
SPM5012T-2R2M	2.20	± 20	100	78.8	71.6	4.9	6.1	2.7


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)

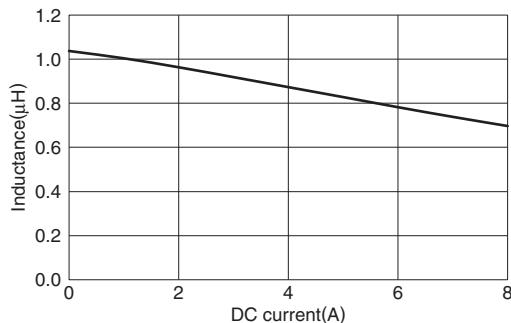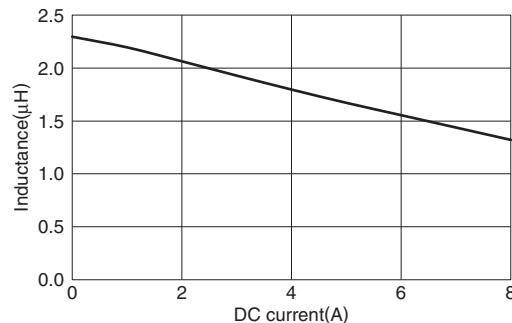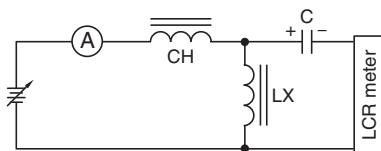
TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS
SPM5012T-1R0M

SPM5012T-2R2M

TEST CIRCUIT

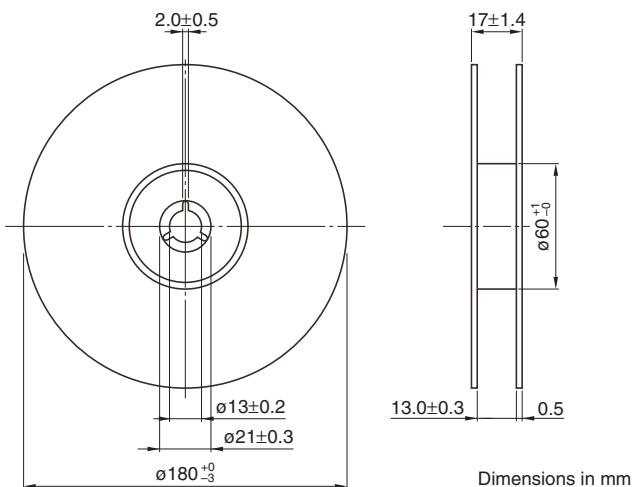
PACKAGING STYLES

REEL DIMENSIONS

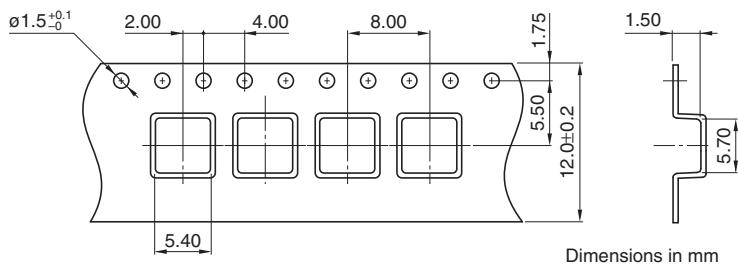

TAPE DIMENSIONS



Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM5030

The SPM5030 contains SMD inductors for large currents. They have a high saturation current, and the DC superimposition characteristics have low temperature variance. This series can meet the needs of customers requiring products smaller than the SPM6530.

FEATURES

- Small and low profile design
Size: 5.2×5.0mm
Height: 3.0mm max.
- High power handling capability:
Small copper loss
Using large saturation induction of Fe-based metals
- Wide operating temperature range due to high Curie temperature of around 550°C.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Note book type computers, servers, VRMs, etc.

PRODUCT IDENTIFICATION

SPM 5030 T - □□□ - □
(1) (2) (3) (4) (5)

(1) Series name

(2) Dimensions L×H

5030 5.0×3.0mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

R20 0.20μH



(5) Inductance tolerance

M ±20%

PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	500 pieces/reel

SHAPES AND DIMENSIONS

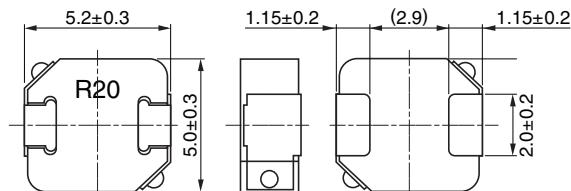


Weight: 0.364g

Dimensions in mm



RECOMMENDED PC BOARD PATTERN




Dimensions in mm

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION

REFLOW SOLDERING

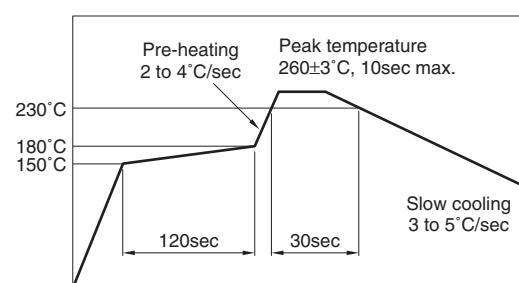

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m Ω)		Rated current(A)*	
				max.	typ.	Based on inductance change typ.	Based on temperature rise typ.
SPM5030T-R20M	0.20	± 20	100	2.31	2.1	21.0	22.2
SPM5030T-R35M	0.35	± 20	100	4.29	3.9	14.9	16.6
SPM5030T-R75M	0.75	± 20	100	9.35	8.5	9.7	11.3
SPM5030T-1R0M	1.0	± 20	100	11.44	10.4	8.5	10.1


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 20%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM5030T-R20M

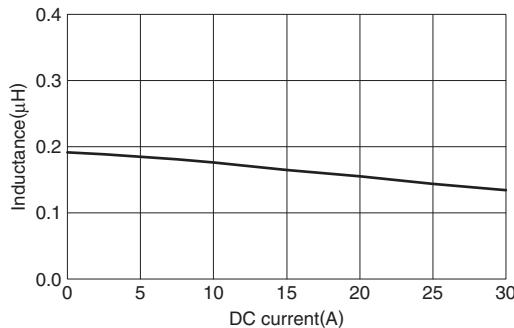


SPM5030T-R35M

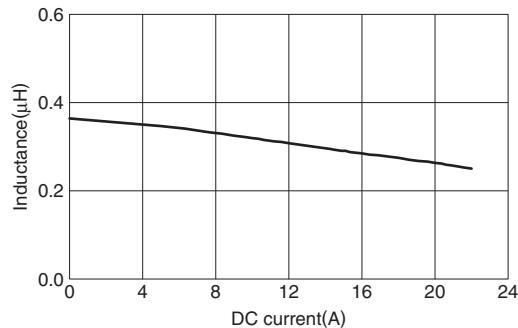


SPM5030T-R75M

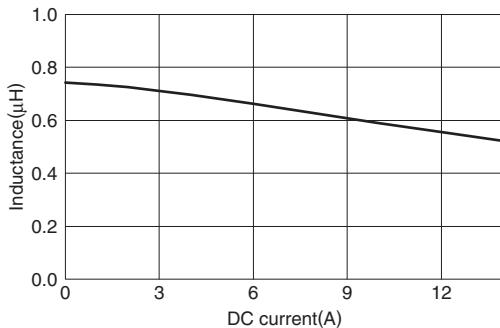

SPM5030T-1R0M

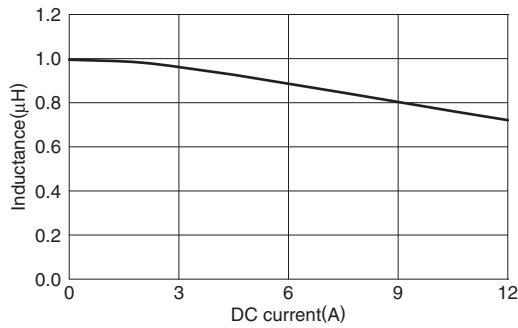


TEST CIRCUIT

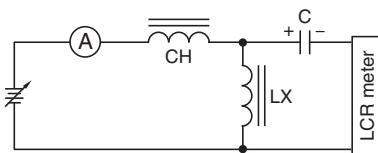


PACKAGING STYLES

REEL DIMENSIONS

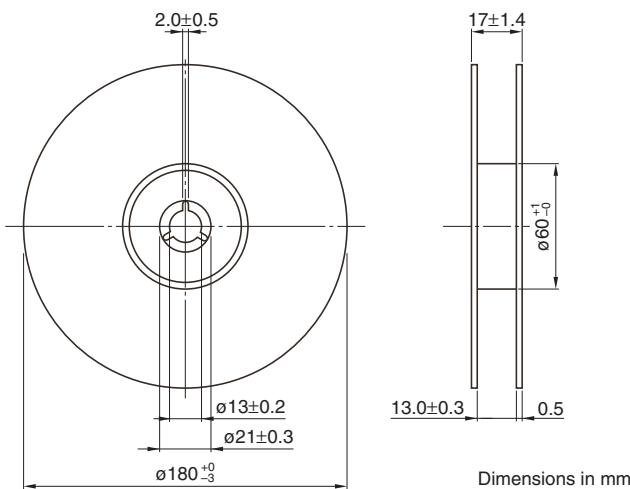

TAPE DIMENSIONS

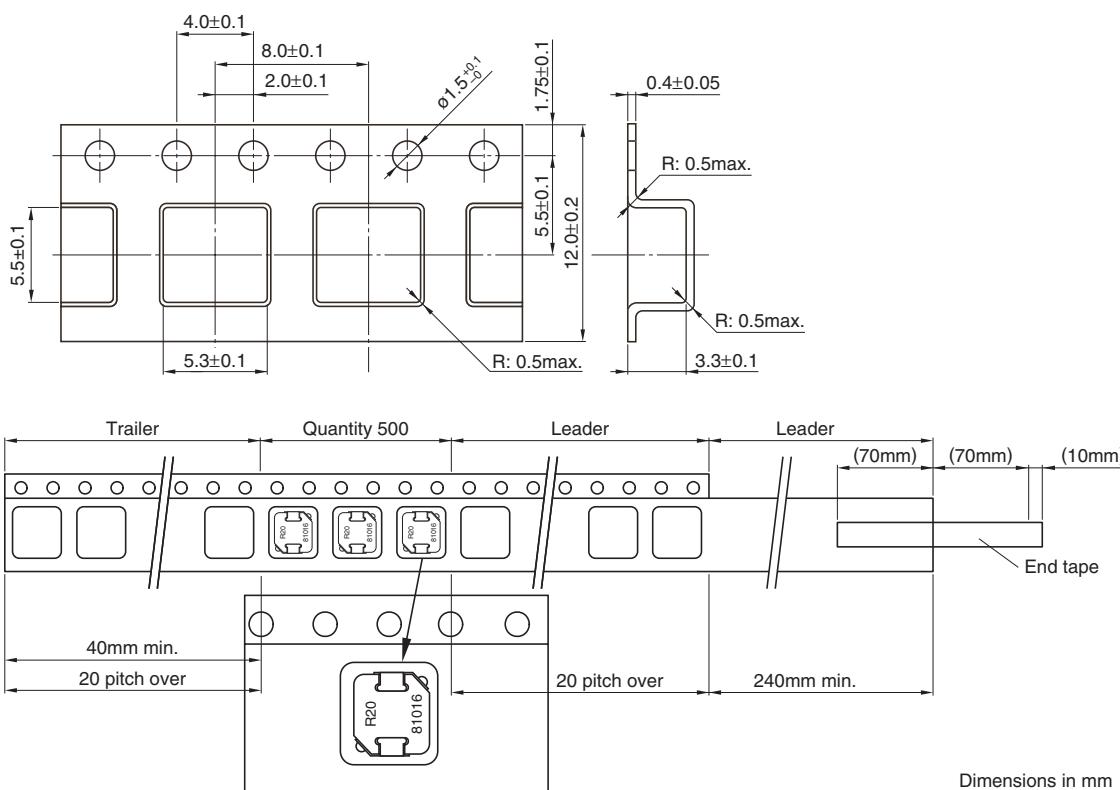

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM6530

The SPM6530 is a large-current SMD power inductor that uses a magnetic metal material.

This product has good superimposition characteristics and low DC resistance.

FEATURES

- Small footprint and Low profile design
Footprint: $7.1 \times 6.5\text{mm}$
Height: 3.0mm max.
- High power handling capability:
Small copper loss
Using large saturation induction of Fe-based metals
- A high Curie temperature of about 550°C means low inductance temperature variance.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Note book type computers, VRMs, etc.

PRODUCT IDENTIFICATION

SPM	6530	T	- 3R3 -	M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions L×H

6530	6.5×3.0mm max.
------	----------------

(3) Packaging style

T	Embossed carrier tape
---	-----------------------

(4) Inductance value

3R3	$3.3\mu\text{H}$
-----	------------------


(5) Inductance tolerance

M	$\pm 20\%$
---	------------


PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	1000 pieces/reel

SHAPES AND DIMENSIONS

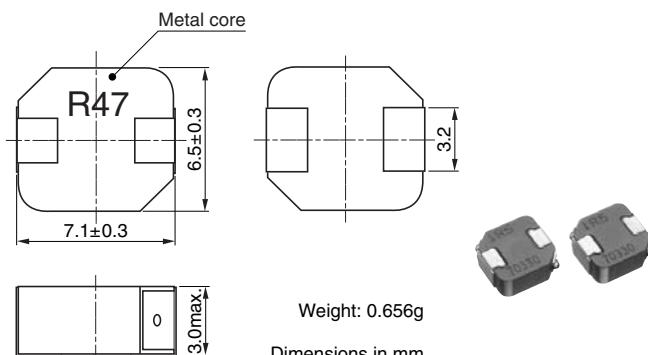

RECOMMENDED PC BOARD PATTERN

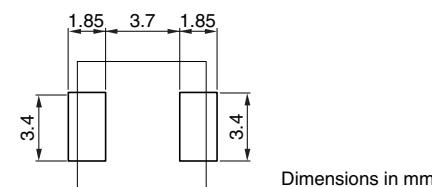


CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION

REFLOW SOLDERING

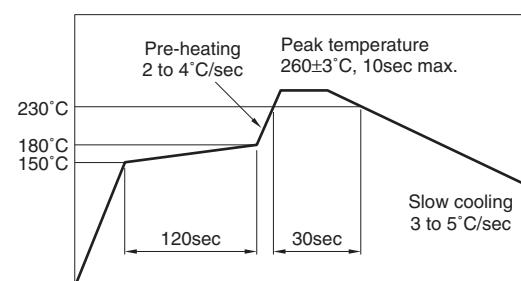

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• Please contact our Sales office when your application is considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.







ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m Ω)		Rated current(A)*	
				max.	typ.	Based on inductance change typ.	Based on temperature rise typ.
SPM6530T-R25M230	0.25	± 20	100	2.31	2.1	28.5	23
SPM6530T-R47M170	0.47	± 20	100	3.63	3.3	20.5	20
SPM6530T-R68M140	0.68	± 20	100	5.39	4.9	16.6	16
SPM6530T-1R0M120	1	± 20	100	7.81	7.1	14.1	13
SPM6530T-1R5M100	1.5	± 20	100	10.67	9.7	11.5	11
SPM6530T-2R2M	2.2	± 20	100	19	17.3	8.4	8.2
SPM6530T-3R3M	3.3	± 20	100	29.7	27	7.3	6.8
SPM6530T-4R7M	4.7	± 20	100	39.4	35.8	6.2	5.6

* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 20%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


• The cleaning agent can not be used for these parts.

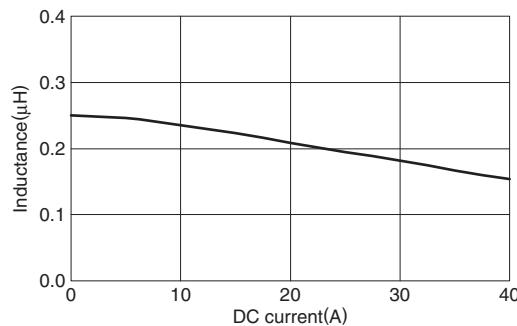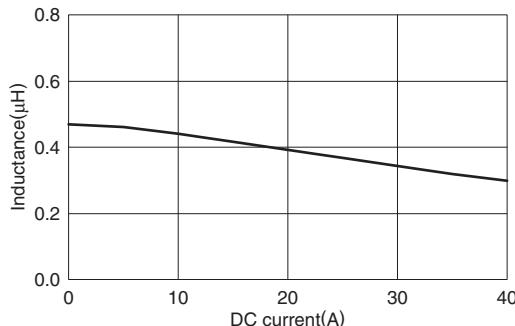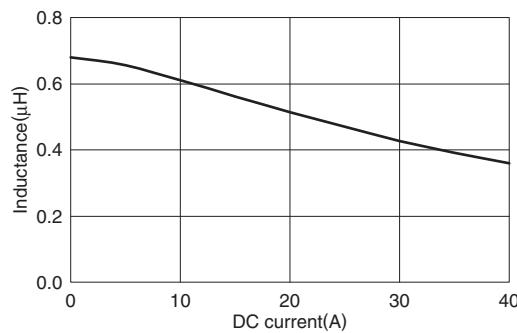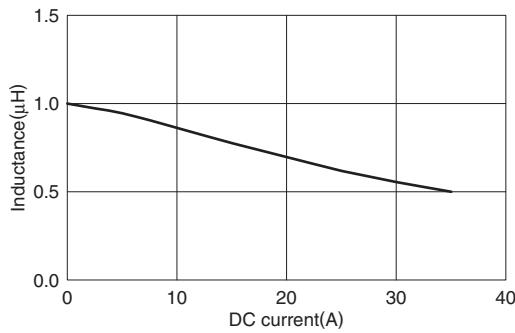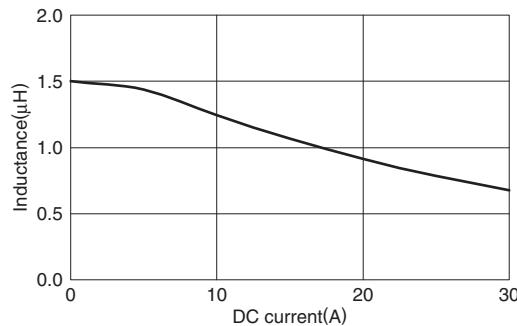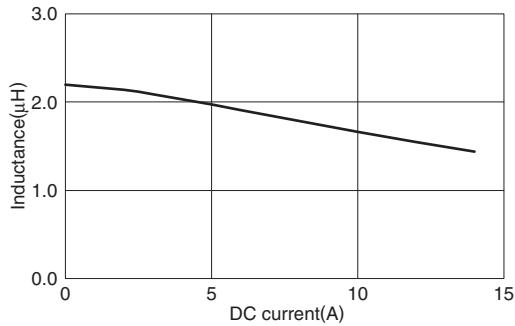TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS
SPM6530T-R25M230

SPM6530T-R47M170

SPM6530T-R68M140

SPM6530T-1R0M120

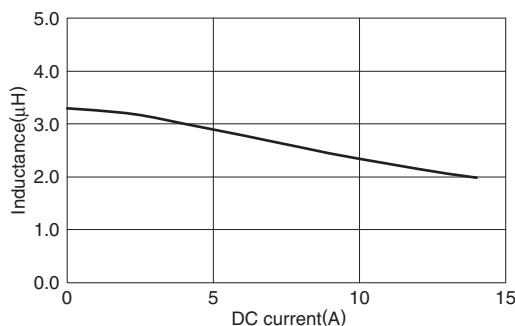SPM6530T-1R5M100

SPM6530T-2R2M


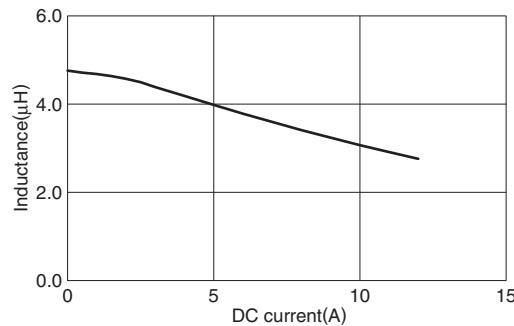
TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM6530T-3R3M



SPM6530T-4R7M




TEST CIRCUIT

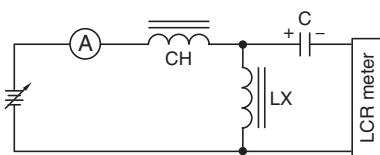


PACKAGING STYLES

REEL DIMENSIONS

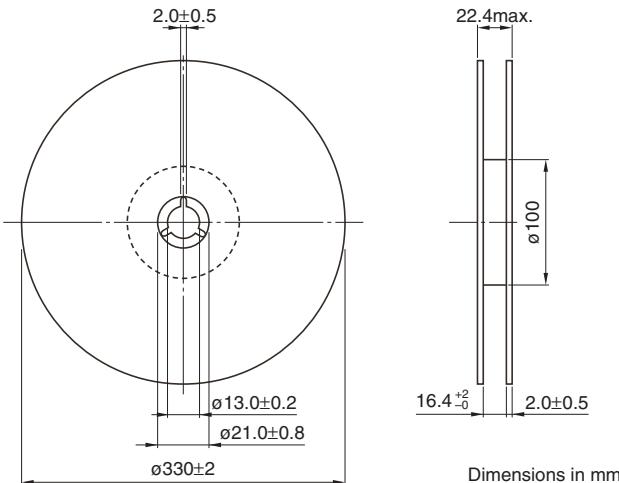

TAPE DIMENSIONS

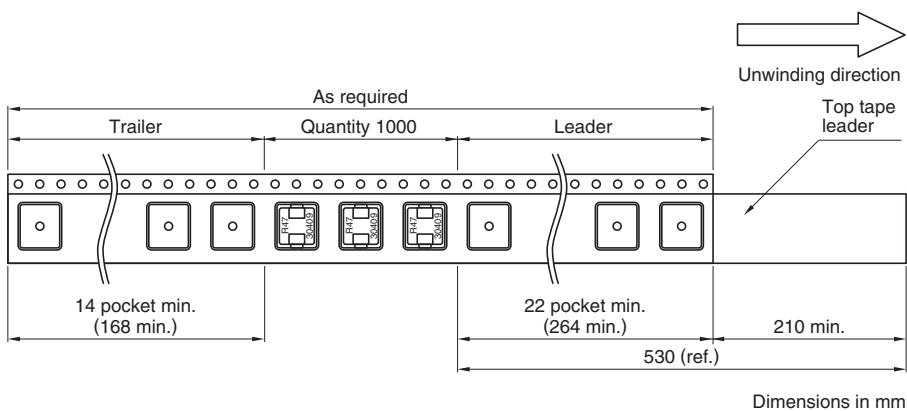

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9