

# MINIATURE RELAY

## 2 POLES—1 to 2 A (FOR SIGNAL SWITCHING)


### A SERIES

RoHS compliant



#### ■ FEATURES

- Extremely low profile and light weight
  - Height: 5 mm
  - Weight: approximately 1.2 g
- Meet FCC (Part 68) standard
- Conforms to FCC rules and regulations part 68
  - Surge strength 1,500 V
- High reliability—bifurcated contacts
- Wide operating range
- DIL pitch terminals
- Plastic sealed type
- Latching version available
- RoHS compliant since date code: 0437B8  
Please see page 7 for more information

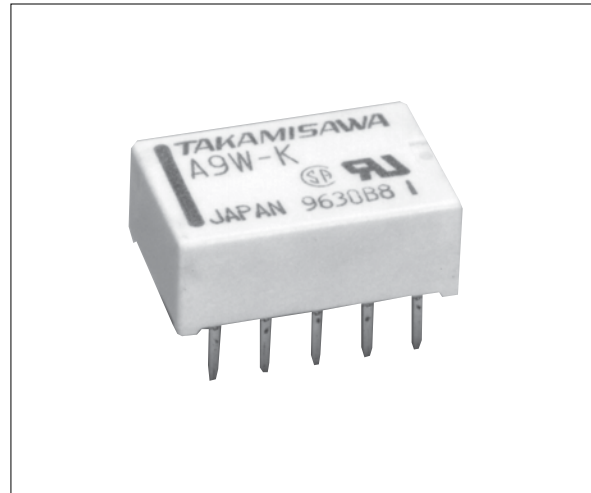

#### ■ ORDERING INFORMATION

[Example]       $\frac{A}{(a)} \frac{L}{(b)} - \frac{D}{(*)} \frac{12}{(c)} \frac{W}{(e)} - \frac{K}{(f)} - \frac{HA}{(g)}$

(a)	Series Name	A : A Series
(b)	Operation Function	Nil : Standard type L : Latching type
(c)	Number of Coil	Nil : Single winding type D : Double winding type
(d)	Nominal Voltage	Refer to the COIL DATA CHART
(e)	Contact	W : Bifurcated type
(f)	Enclosure	K : Plastic sealed type
(g)	Coil Sensitivity	Nil : Standard HA : 75% must voltage operate

Note: Actual marking omits the hyphen (-) of (\*)

# A SERIES

## ■ COIL DATA CHART

MODEL		Nominal voltage	Coil resistance ( $\pm 10\%$ )	Must operate voltage* <sup>1</sup>	Must release voltage* <sup>1</sup>	Nominal power
Standard Type	A-1.5W-K	1.5 VDC	16.1 $\Omega$	+1.13 VDC	+0.15 VDC	140 mW
	A- 3 W-K	3 VDC	64.3 $\Omega$	+2.25 VDC	+0.3 VDC	140 mW
	A-4.5W-K	4.5 VDC	145 $\Omega$	+3.38 VDC	+0.45 VDC	140 mW
	A- 5 W-K	5 VDC	178 $\Omega$	+3.75 VDC	+0.5 VDC	140 mW
	A- 6 W-K	6 VDC	257 $\Omega$	+4.5 VDC	+0.6 VDC	140 mW
	A- 9 W-K	9 VDC	579 $\Omega$	+6.75 VDC	+0.9 VDC	140 mW
	A-12 W-K	12 VDC	1,028 $\Omega$	+9.0 VDC	+1.2 VDC	140 mW
	A-18 W-K	18 VDC	1,620 $\Omega$	+13.5 VDC	+1.8 VDC	200 mW
	A-24 W-K	24 VDC	2,880 $\Omega$	+18.0 VDC	+2.4 VDC	200 mW
	A-48 W-K	48 VDC	7,680 $\Omega$	+36.0 VDC	+4.8 VDC	300 mW

Note: \*<sup>1</sup> Specified values are subject to pulse wave voltage.  
All values in the table are measured at 20°C.

MODEL		Nominal voltage	Coil resistance ( $\pm 10\%$ )	Set voltage* <sup>1</sup>	Reset voltage* <sup>1</sup>	Nominal power
Single Winding Latching Type	AL-1.5W-K	1.5 VDC	22.5 $\Omega$	+1.13 VDC	-1.05 VDC	100 mW
	AL- 3 W-K	3 VDC	90 $\Omega$	+2.25 VDC	-2.1 VDC	100 mW
	AL-4.5W-K	4.5 VDC	203 $\Omega$	+3.38 VDC	-3.15 VDC	100 mW
	AL- 5 W-K	5 VDC	250 $\Omega$	+3.75 VDC	-3.5 VDC	100 mW
	AL- 6 W-K	6 VDC	360 $\Omega$	+4.5 VDC	-4.2 VDC	100 mW
	AL- 9 W-K	9 VDC	810 $\Omega$	+6.75 VDC	-6.3 VDC	100 mW
	AL-12 W-K	12 VDC	1,440 $\Omega$	+9.0 VDC	-8.4 VDC	100 mW
	AL-18 W-K	18 VDC	2,160 $\Omega$	+13.5 VDC	-12.6 VDC	150 mW
	AL-24 W-K	24 VDC	3,840 $\Omega$	+18.0 VDC	-16.8 VDC	150 mW
Double Winding Latching Type	AL-D1.5W-K	1.5 VDC	P 11.25 $\Omega$	+1.13 VDC		200 mW
			S 11.25 $\Omega$		+1.05 VDC	
	AL-D 3 W-K	3 VDC	P 45 $\Omega$	+2.25 VDC		200 mW
			S 45 $\Omega$		+2.1 VDC	
	AL-D4.5W-K	4.5 VDC	P 101 $\Omega$	+3.38 VDC		200 mW
			S 101 $\Omega$		+3.15 VDC	
	AL-D 5 W-K	5 VDC	P 125 $\Omega$	+3.75 VDC		200 mW
			S 125 $\Omega$		+3.5 VDC	
	AL-D 6 W-K	6 VDC	P 180 $\Omega$	+4.50 VDC		200 mW
			S 180 $\Omega$		+4.2 VDC	
	AL-D 9 W-K	9 VDC	P 405 $\Omega$	+6.75 VDC		200 mW
			S 405 $\Omega$		+6.3 VDC	
AL-D12 W-K	12 VDC	P 720 $\Omega$	+9.0 VDC		200 mW	
		S 720 $\Omega$		+8.4 VDC		
AL-D18 W-K	18 VDC	P 1,080 $\Omega$	+13.5 VDC		300 mW	
		S 1,080 $\Omega$		+12.6 VDC		
AL-D24 W-K	24 VDC	P 1,920 $\Omega$	+18.0 VDC		300 mW	
		S 1,920 $\Omega$		+16.8 VDC		

Note: \*<sup>1</sup> Specified values are subject to pulse wave voltage.  
All values in the table are measured at 20°C.

P: Primary coil S: Secondary coil

# A SERIES

## ■ SPECIFICATIONS

Item		Standard Type	Single Winding Latching Type	Double Winding Latching Type
		A-( ) W-K	AL-( ) W-K	AL-D ( ) W-K
Contact	Arrangement	2 form C (DPDT)		
	Material	Gold overlay silver alloy		
	Resistance (initial)	Maximum 50 mΩ (at 1 A 6 VDC)		
	Rating (resistive)	0.5 A 125 VAC or 1 A 30 VDC		
	Maximum Carrying Current	2 A		
	Maximum Switching Power	62.5 AV/30 W		
	Maximum Switching Voltage	125VAC, 110VDC		
	Maximum Switching Current	2 A		
	Minimum Switching Load*1	0.01 mA 10 mVDC		
	Capacitance	Approximately 0.5 pF (between open contacts, adjacent contacts) Approximately 1.0 pF (between coil and contacts)		
Coil	Nominal Power (at 20°C)	140 to 300 mW	100 to 150 mW	200 to 300 mW
	Operate Power (at 20°C)	80 to 170 W	60 to 85 mW	150 to 170 mW
	Operating Temperature	-40°C to +85°C (no frost) (refer to the CHARACTERISTIC DATA)		
Time Value	Operate (at nominal voltage)	Maximum 6 ms	Maximum 6 ms (set)	
	Release (at nominal voltage)	Maximum 4 ms	Maximum 6 ms (reset)	
Life	Mechanical	1 × 10 <sup>8</sup> ops. minimum	1 × 10 <sup>7</sup> ops. minimum	
	Electrical	2 × 10 <sup>5</sup> ops. min. (0.5 A 125 VAC), 5 × 10 <sup>5</sup> ops. min. (1 A 30 VDC)		
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 3.3 mm)	
		Endurance	10 to 55 Hz (double amplitude of 5.0 mm)	
	Shock Resistance	Misoperation	500 m/s <sup>2</sup> (11 ±1 ms)	
		Endurance	1,000 m/s <sup>2</sup> ( 6 ±1 ms)	
	Weight	Approximately 1.2 g		

\*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.










## ■ INSULATION

Item		
Resistance (initial)		Minimum 1,000 MΩ (500VDC)
Dielectric Strength	open contacts	1,000 VAC 1 min.
	coil and contacts adjacent contacts	1,000 VAC 1 min.
Surge Voltage		1500V (coil-contact) (10/160 μs standard wave)




## ■ SAFETY STANDARD AND FILE NUMBERS

Type	Compliance	Contact rating
UL	UL 478, UL 508 E 45026	Flammability: UL 94-V0 (plastics) 0.5A, 125VAC (General use) 2A, 30VDC (resistive) 0.3A, 110VDC (resistive)
CSA	C22.2 No. 14 LR 35579	











## CHARACTERISTIC DATA

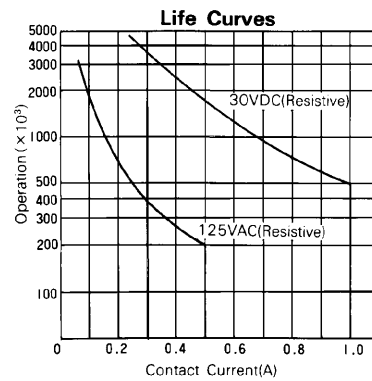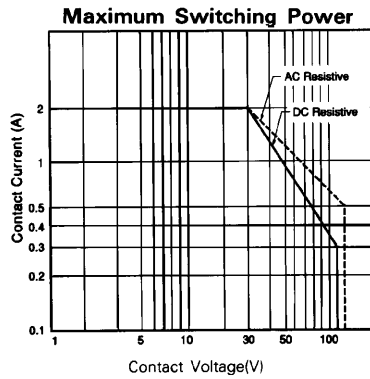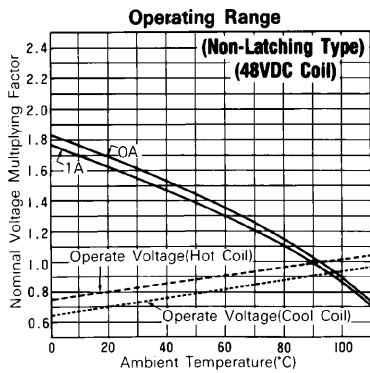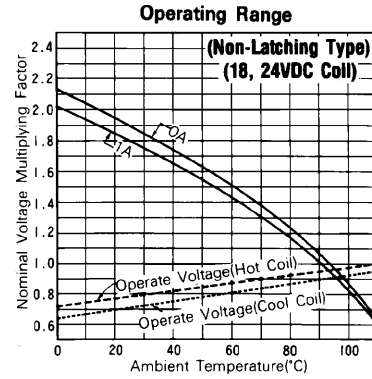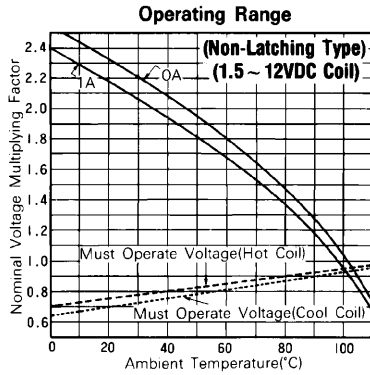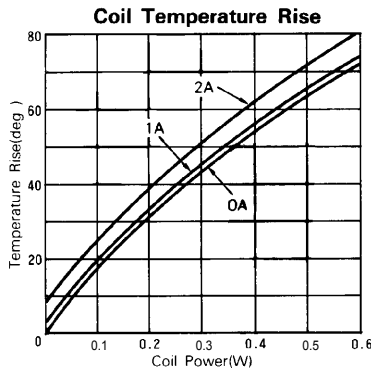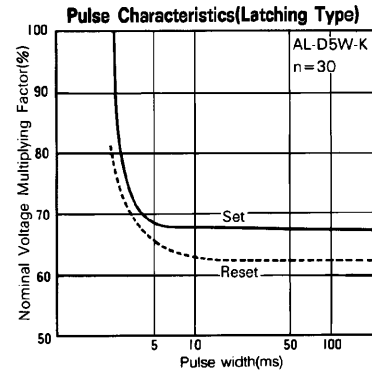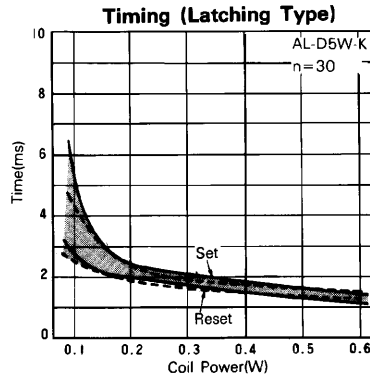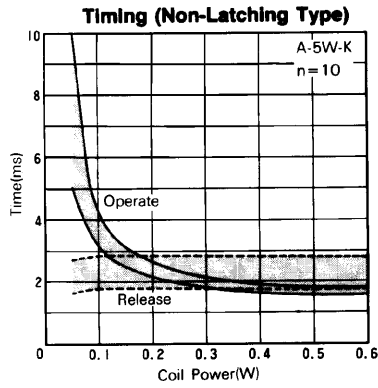

## REFERENCE DATA

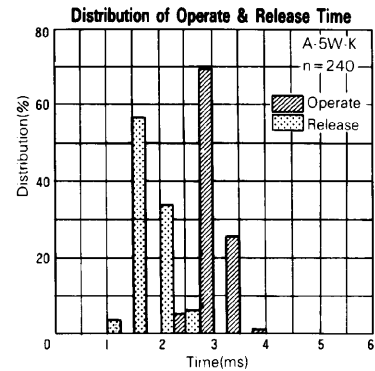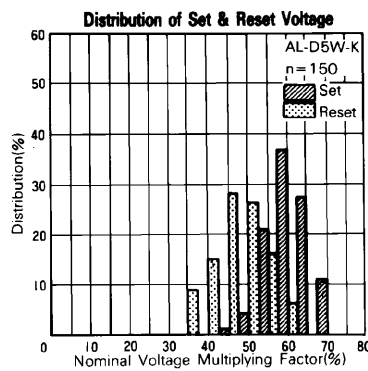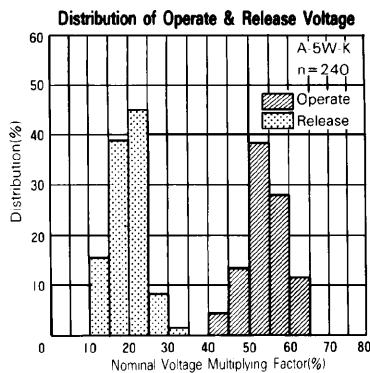

# A SERIES

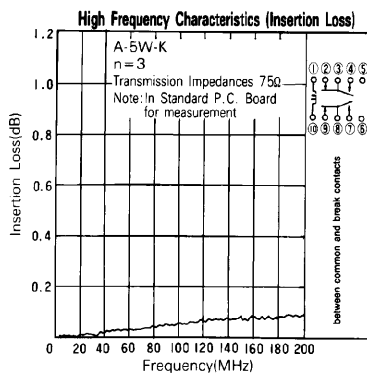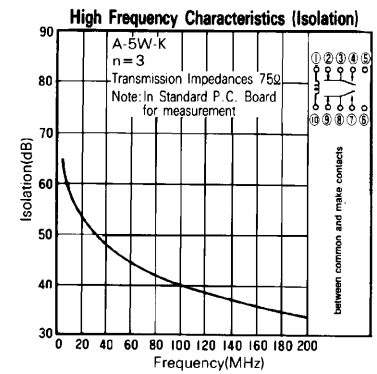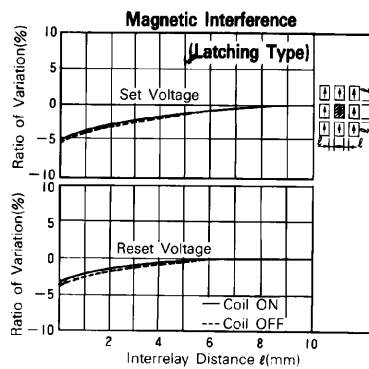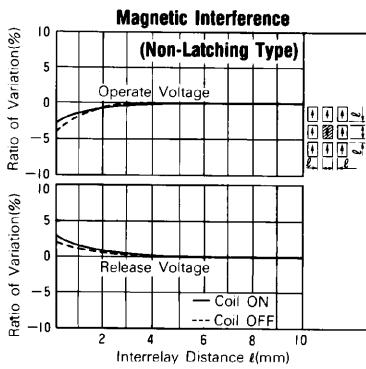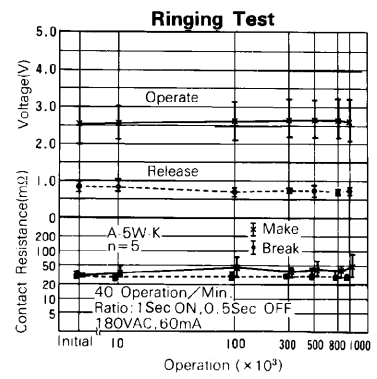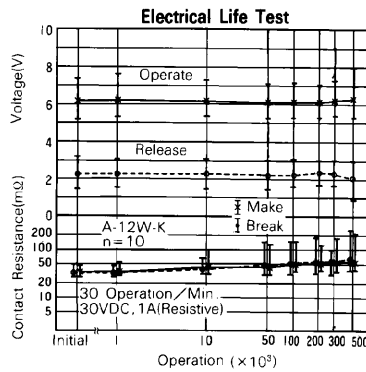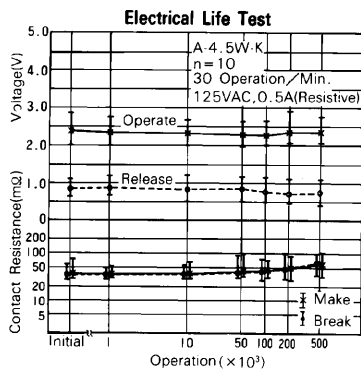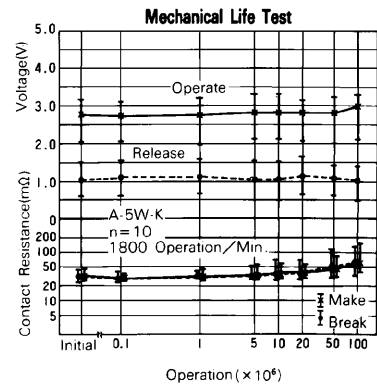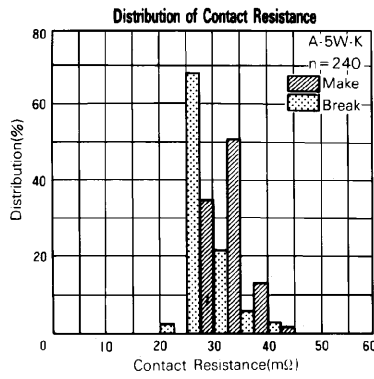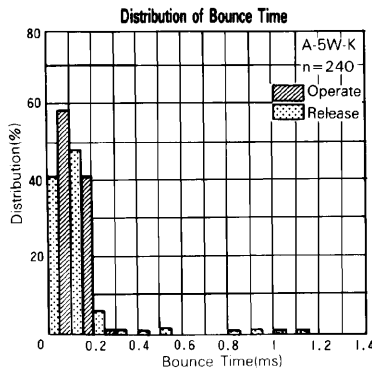

# A SERIES


## ■ DIMENSIONS

### ● Dimensions


### ● Schematics (Bottom View)

### ● PC board mounting hole layout (Bottom View)

A, AL type (Non-latching type, single winding latching type)

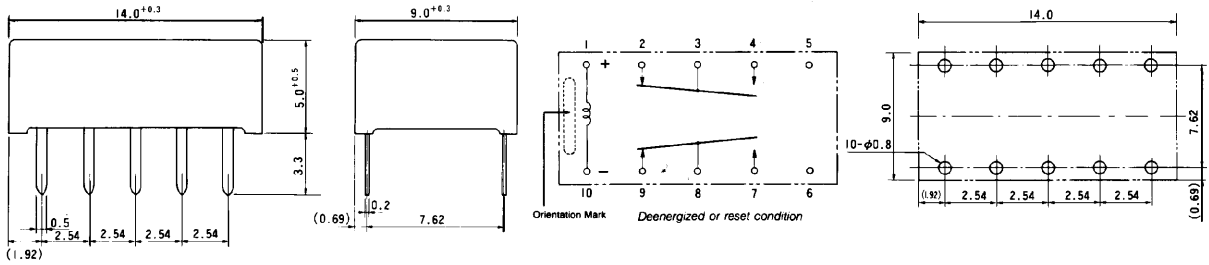

AL-D type (Double winding latching type)

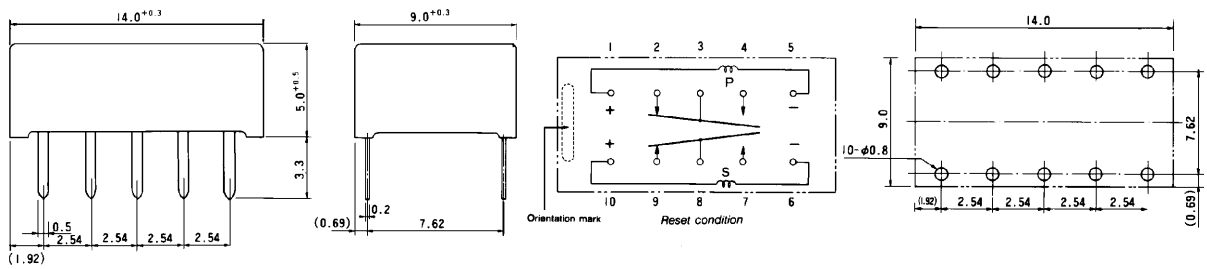

Unit: mm

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

#### Reflow Solder condition

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevices/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcsl@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. January 9, 2008.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9