


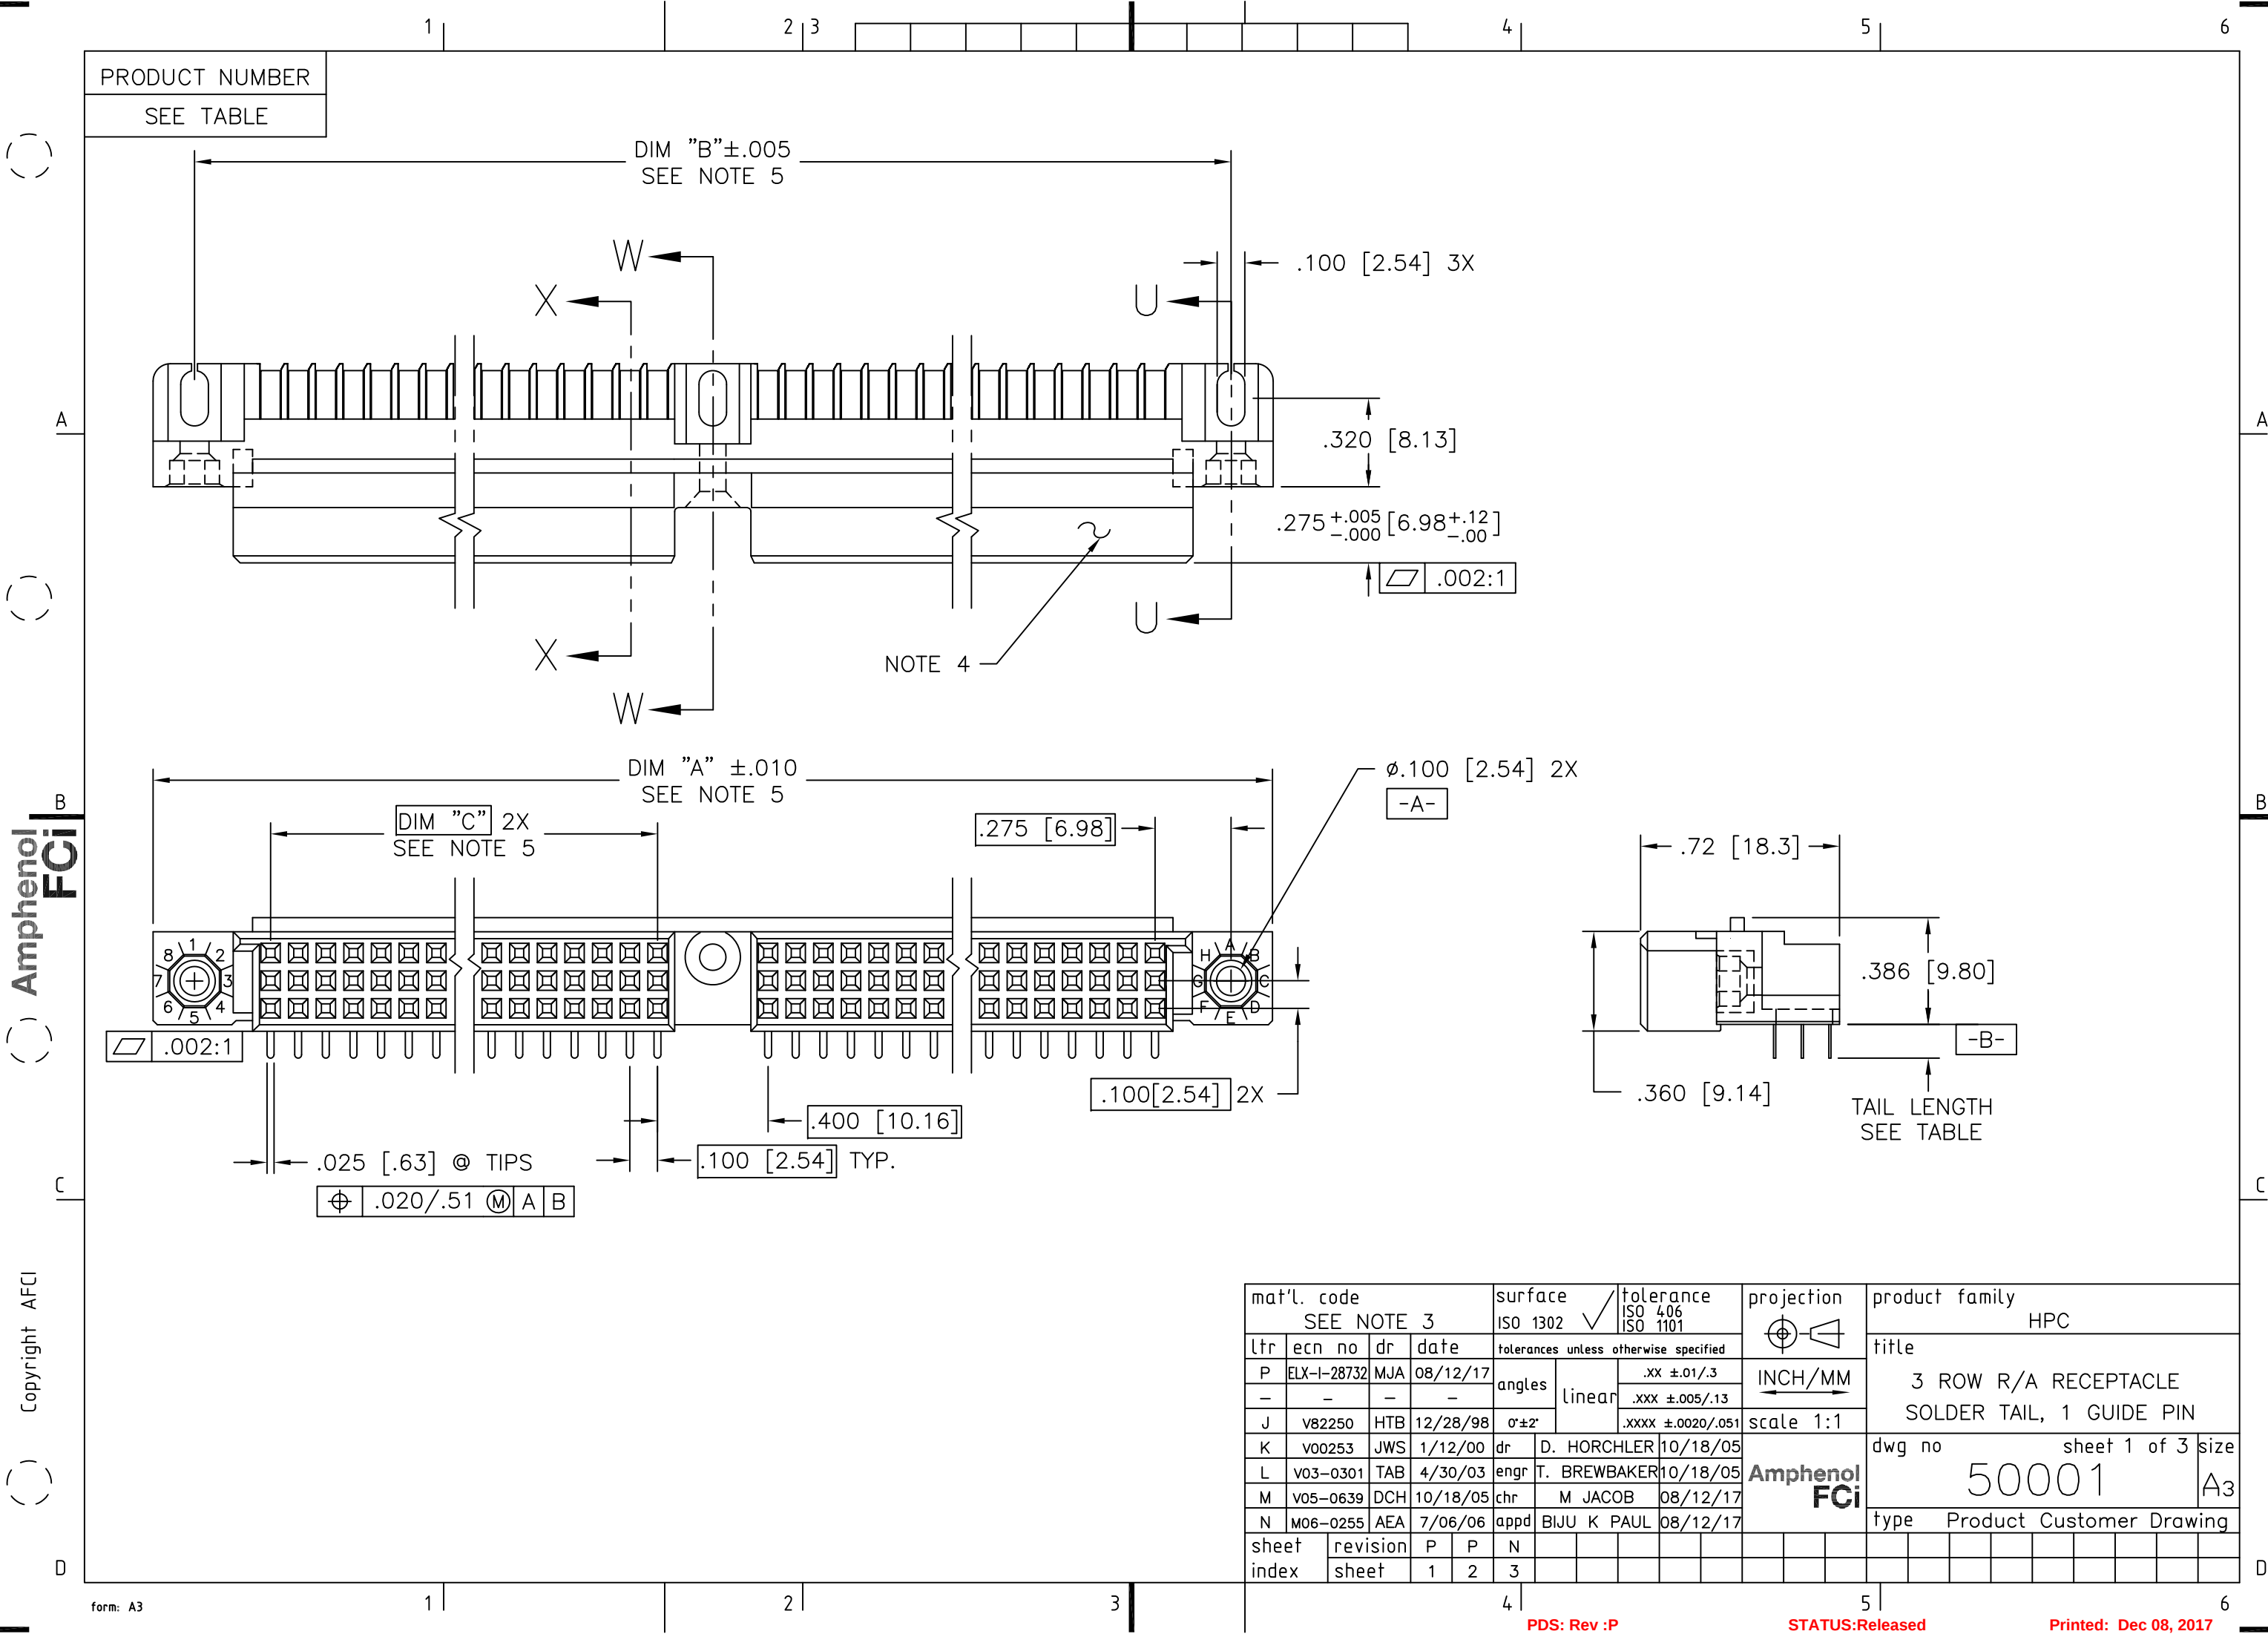

PRODUCT NUMBER

SEE TABLE

DIM "B" ±.005
SEE NOTE 5

.100 [2.54] 3X

.320 [8.13]

.275 $\pm .005$ $\begin{matrix} +.12 \\ -.00 \end{matrix}$ [6.98 $\begin{matrix} +.12 \\ -.00 \end{matrix}$]

$\square$.002:1

NOTE 4

DIM "A" ±.010
SEE NOTE 5

DIM "C" 2X
SEE NOTE 5

.275 [6.98]

φ.100 [2.54] 2X

-A-

.72 [18.3]

.386 [9.80]

-B-

.360 [9.14]

TAIL LENGTH
SEE TABLE



.025 [.63] @ TIPS

.100 [2.54] TYP.


.400 [10.16]

.100 [2.54] 2X

ϕ .020/.51 (M) A B

mat'l. code SEE NOTE 3				surface ISO 1302 ✓			tolerance ISO 406 ISO 1101		projection 			product family HPC											
ltr	ecn no		dr	date		tolerances unless otherwise specified								title									
P	ELX-I-28732		MJA	08/12/17		angles	linear	.XX ±.01/.3		INCH/MM 			3 ROW R/A RECEPTACLE SOLDER TAIL, 1 GUIDE PIN										
-	-		-	-				.XXX ±.005/.13															
J	v82250		HTB	12/28/98				σ±2'	.XXX ±.0020/.051		scale 1:1												
K	v00253		JWS	1/12/00		dr	D. HORCHLER		10/18/05		Amphenol FCI			dwg no		sheet 1 of 3				size			
L	v03-0301		TAB	4/30/03		enrg	T. BREWBAKER		10/18/05					50001		A3							
M	v05-0639		DCH	10/18/05		chr	M JACOB		08/12/17														
N	M06-0255		AEA	7/06/06		appd	BIJU K PAUL		08/12/17														
sheet		revision		P	P	N																	
index		sheet		1	2	3																	


PRODUCT NUMBER
SEE TABLE

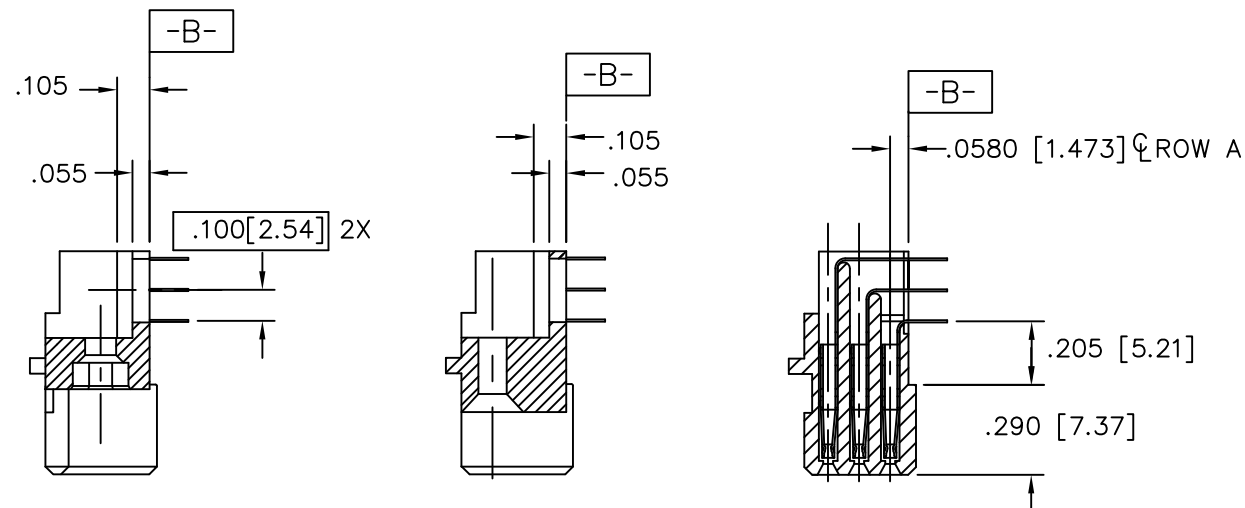

SECTION U-U

SECTION W-W

SECTION X-X

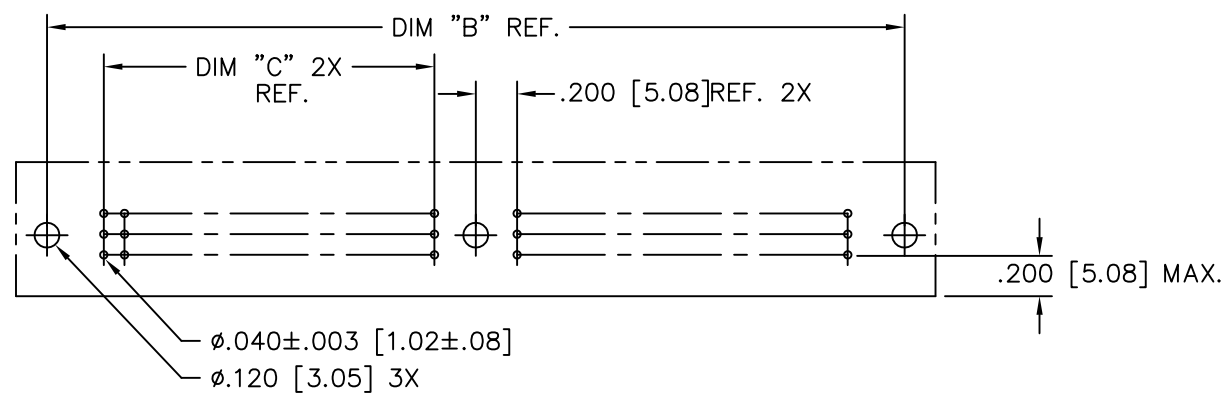

RECOMMENDED PCB LAYOUT
(ALL HOLES LOCATED ON .100 [2.54] GRID
UNLESS OTHERWISE SPECIFIED)

NOTES:

1. PRODUCT NUMBERING CODE:

50001 - X YYY Z LF

LEAD FREE (OPTIONAL)
TAIL LENGTH SEE TABLE
NO. OF POSITIONS SEE NOTE 2
PLATING SEE TABLE
BASE NUMBER

PRODUCT NUMBERING CODE FOR
SELECT LOAD PART NUMBERS:

50001 - XXYYY LF

LEAD FREE (OPTIONAL)
SEQUENCE NUMBER
ALWAYS 'XX'
BASE NUMBER

- ② THIS PRODUCT IS CONFIGURED IN SIZES OF 20 THRU 122 COLUMNS IN INCREMENTS OF TWO.
i.e.: 20,22,24,26.....118,120,122.
- ③ HOUSING MATERIAL: GLASS AND MINERAL FILLED THERMOPLASTIC.
CONTACT MATERIAL: BeCu
- ④ COMPANY NAME, PART NUMBER AND LOT CODE TO APPEAR ON THIS SURFACE PER BUS-12-108.
- ⑤ LENGTH FORMUALS:
DIM A= .100/2.54 X NO. OF COLUMNS + 1.05/26.7
DIM B= .100/2.54 X NO. OF COLUMNS + .750/19.05
DIM C= .100/2.54 X NO. OF COLUMNS DIVIDED BY 2 - .100/2.54
6. PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
7. THIS HOUSING (WITH "LF" SUFFIX) WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURES FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑧ PLATING OPTION:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l. code SEE NOTE 3				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family HPC			
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM	title 3 ROW R/A RECEPTACLE SOLDER TAIL, 1 GUIDE PIN			
P				angles	linear					
				$\sigma \pm 2'$		scale 1:1				
				dr	D. HORCHLER	10/18/05				
				enr	T. BREWBAKER	10/18/05				
				chr	M JACOB	08/12/17				
				appd	BIJU K PAUL	08/12/17	type Product Customer Drawing			
sheet index	revision sheet									

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9