
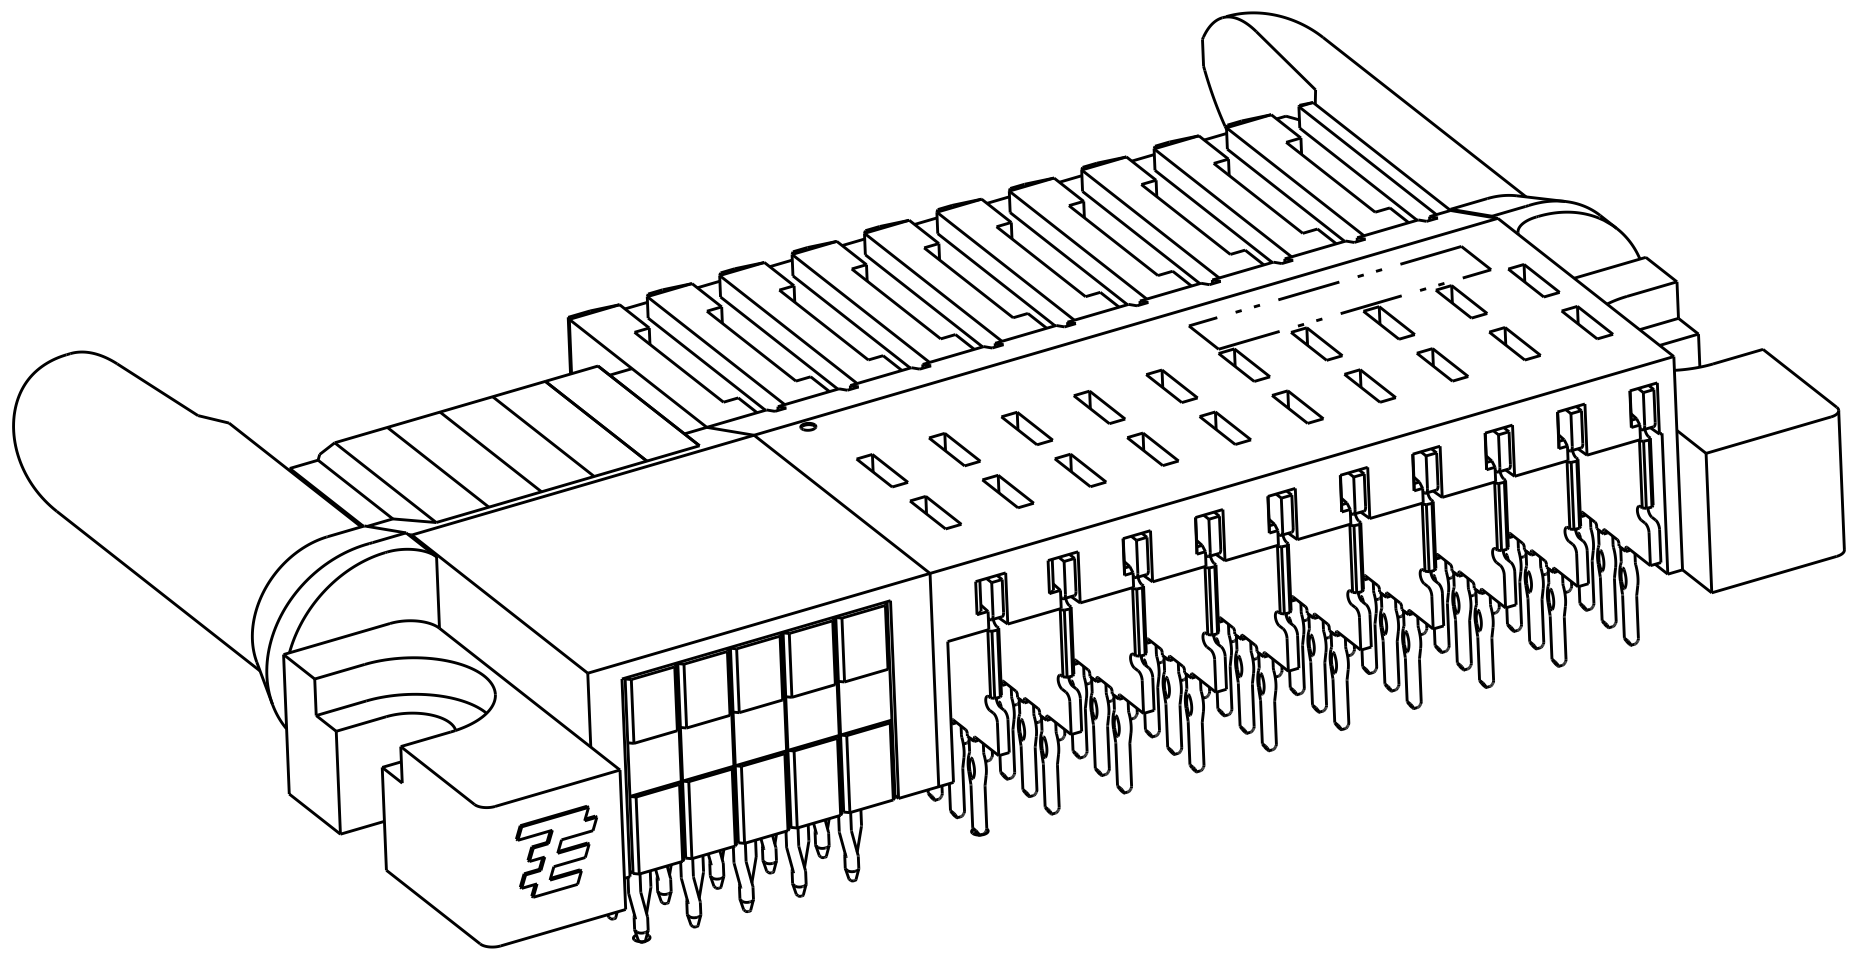


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AA	00		A2	REV PER ECO-13-015117	16SEP2013	OL	SZ
			A3	ADD NEW PART 6--2	18NOV2013	OL	SZ
			A4	ECR-15-001425	19JAN2015	SZ	SZ

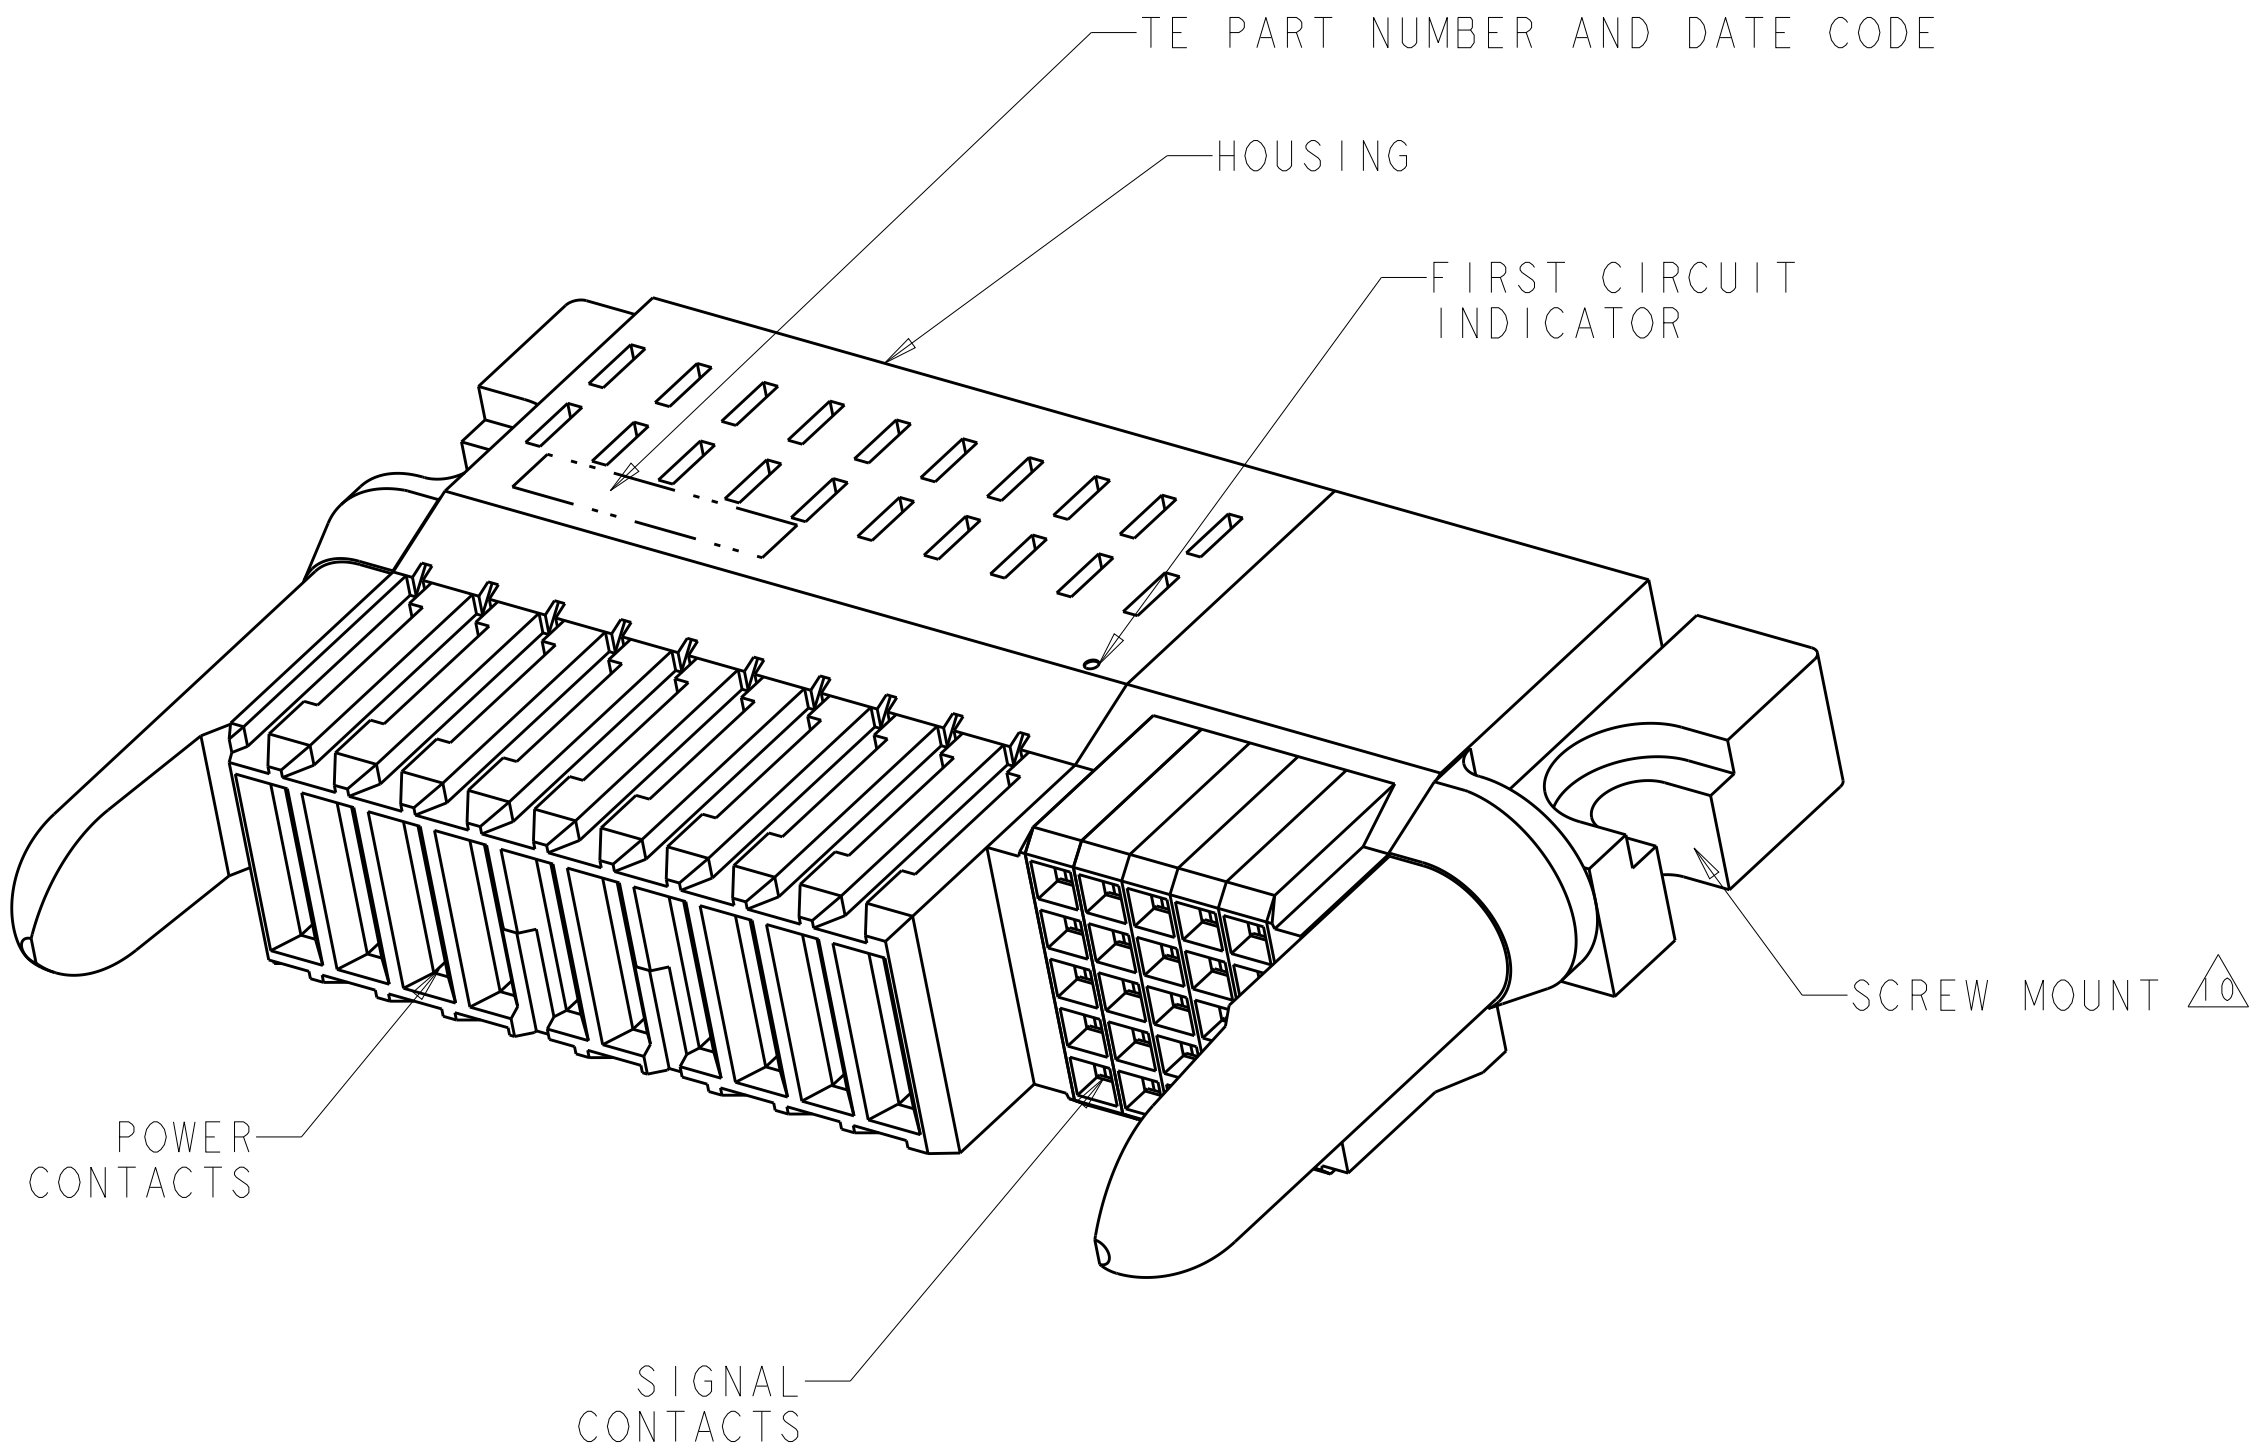

2-1926739-5 SHOWN

1. HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER, COLOR: BLACK, UL 94 V-0 RATED
SIGNAL CONTACT: PHOSPHOR BRONZE
SIGNAL OVERMOLD: GLASS FILLED POLYESTER
POWER CONTACT: COPPER ALLOY
2. SIGNAL CONTACT: 0.00127mm MIN NICKEL ALL OVER,
MATING AREA: 0.00008mm MIN GOLD OVER
0.00076mm MIN PALLADIUM-NICKEL
TAIL AREA: 0.0005mm MIN MATTE TIN

POWER CONTACT: 0.00127mm MIN NICKEL ALL OVER,
MATING AREA: 0.00008mm MIN GOLD OVER
0.00076mm MIN PALLADIUM-NICKEL,
TAIL AREA: 0.0005mm MIN MATTE TIN
3. CONTACT MATING AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
4. THIS CONNECTOR EMPLOYS UL RECOGNIZED Z-PACK 2mm HM SIGNAL CONTACTS

- 5 DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER
- 6 PC BOARD THICKNESS 1.4mm MIN, FOR WAVE SOLDER PC BOARD THICKNESS 2.62 MAX
- 7 SEE APPLICATION SPEC 114-13215 FOR PLATED THROUGH HOLE INFORMATION
8. SEE CUSTOMER DRAWING 1926730 OR 1926732 FOR MATING CONNECTOR
- 9 UNPLATED HOLES
- 10 #4-40 UNC PAN HEAD SCREW WITH HEX NUT, NOT SHOWN, SUPPLIED BY CUSTOMER

12	15	1	2	21.94	25.74	15S X 2P	8-1926739-0
144	40	23	7	92.44	96.24	40S X 24P	7-1926739-7
120	35	19	6	79.44	83.24	35S X 20P	6-1926739-2
108	35	17	6	73.94	77.74	35S X 18P	5-1926739-5
96	25	15	4	64.44	68.24	25S X 16P	4-1926739-6
72	15	11	2	49.44	53.24	15S X 12P	3-1926739-0
48	20	7	3	40.44	44.24	20S X 8P	1-1926739-1
72	25	11	4	51.44	57.24	25S X 12P	1926739-9
48	25	7	4	42.44	46.24	25S X 8P	1-1926739-8
36	20	5	3	36.74	40.54	20S X 6P	1-1926739-0
60	25	9	4	47.94	51.74	25S X 10P	2-1926739-5
F PLC	E PLC	D SPACES	C SPACES	DIM B	DIM A	NO OF POSITIONS	PART NUMBER

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND SHOULD BE USED FOR INFORMATION PURPOSES ONLY. IT IS SUBJECT TO CHANGE AND SHOULD BE USED FOR INFORMATION PURPOSES ONLY. IT IS SUBJECT TO CHANGE AND SHOULD BE USED FOR INFORMATION PURPOSES ONLY.

ORLANDO LI 28OCT2011

CHK SUNY ZHAO 28OCT2011

APVD SUNY ZHAO 28OCT2011

DIMENSIONS:

mm

0 PLC ±
1 PLC ±
2 PLC ±0.13
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL SEE NOTE 1

FINISH SEE NOTE 2

DWN

ORLANDO LI 28OCT2011

CHK SUNY ZHAO 28OCT2011

APVD SUNY ZHAO 28OCT2011

PRODUCT SPEC

108-2325

APPLICATION SPEC

114-13215

WEIGHT

-

Customer Drawing

Tyco Electronics

Shanghai, PR 200233

NAME

RECEPTACLE ASSEMBLY, RIGHT ANGLE, PASSIVE GUIDE, SIGNAL/POWER, WITH SCREW MOUNT, MINIPAK HDL

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779

C=1926739

-

SCALE

3:1

SHEET

1

OF




3

REV

A4

AMP 4805 REV 31MAR2000

LOC		DIST		REVISIONS					
AA		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

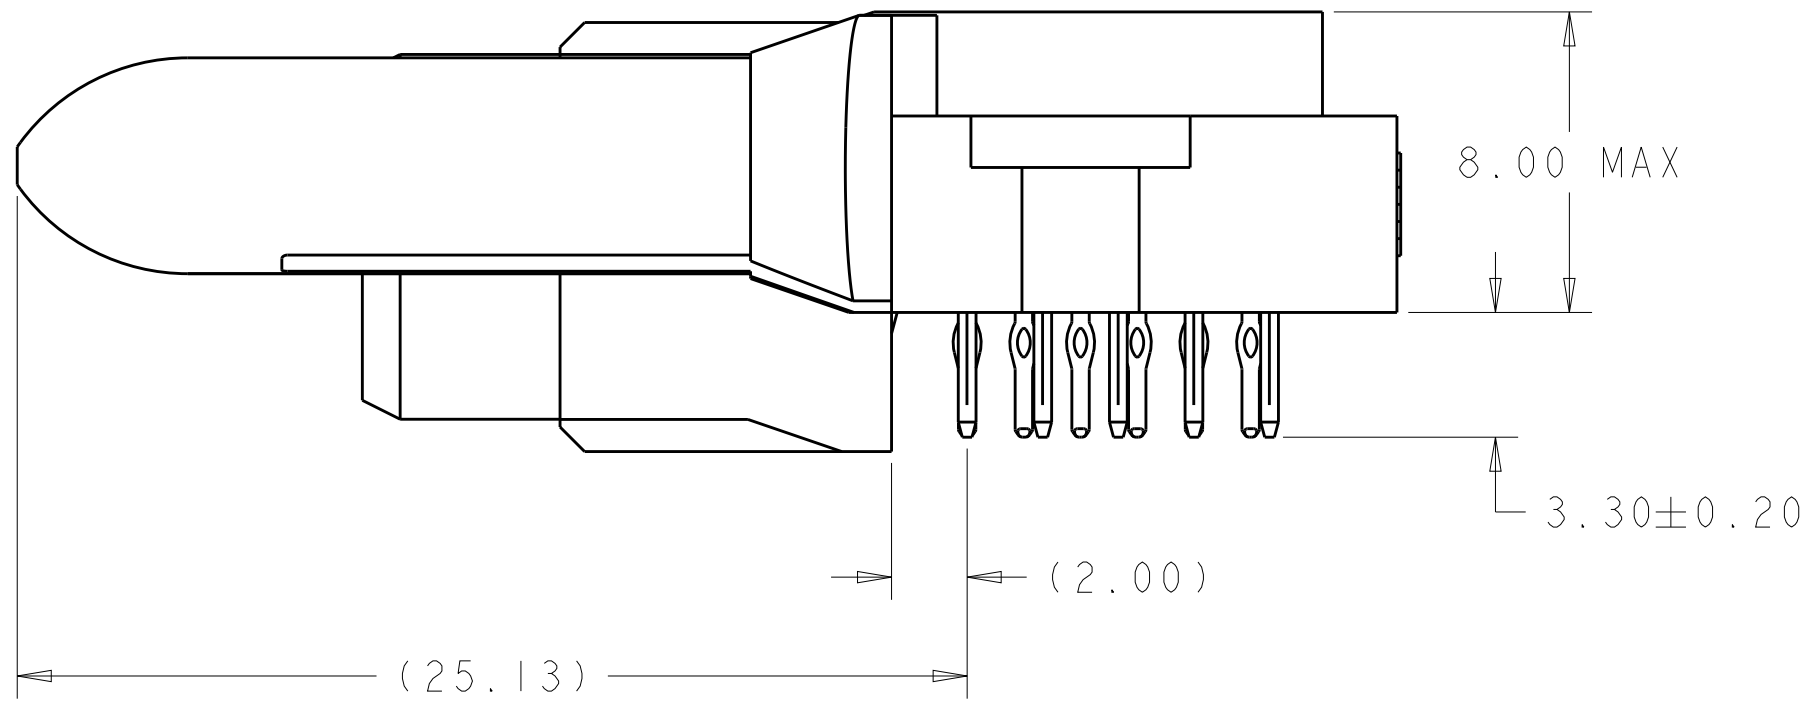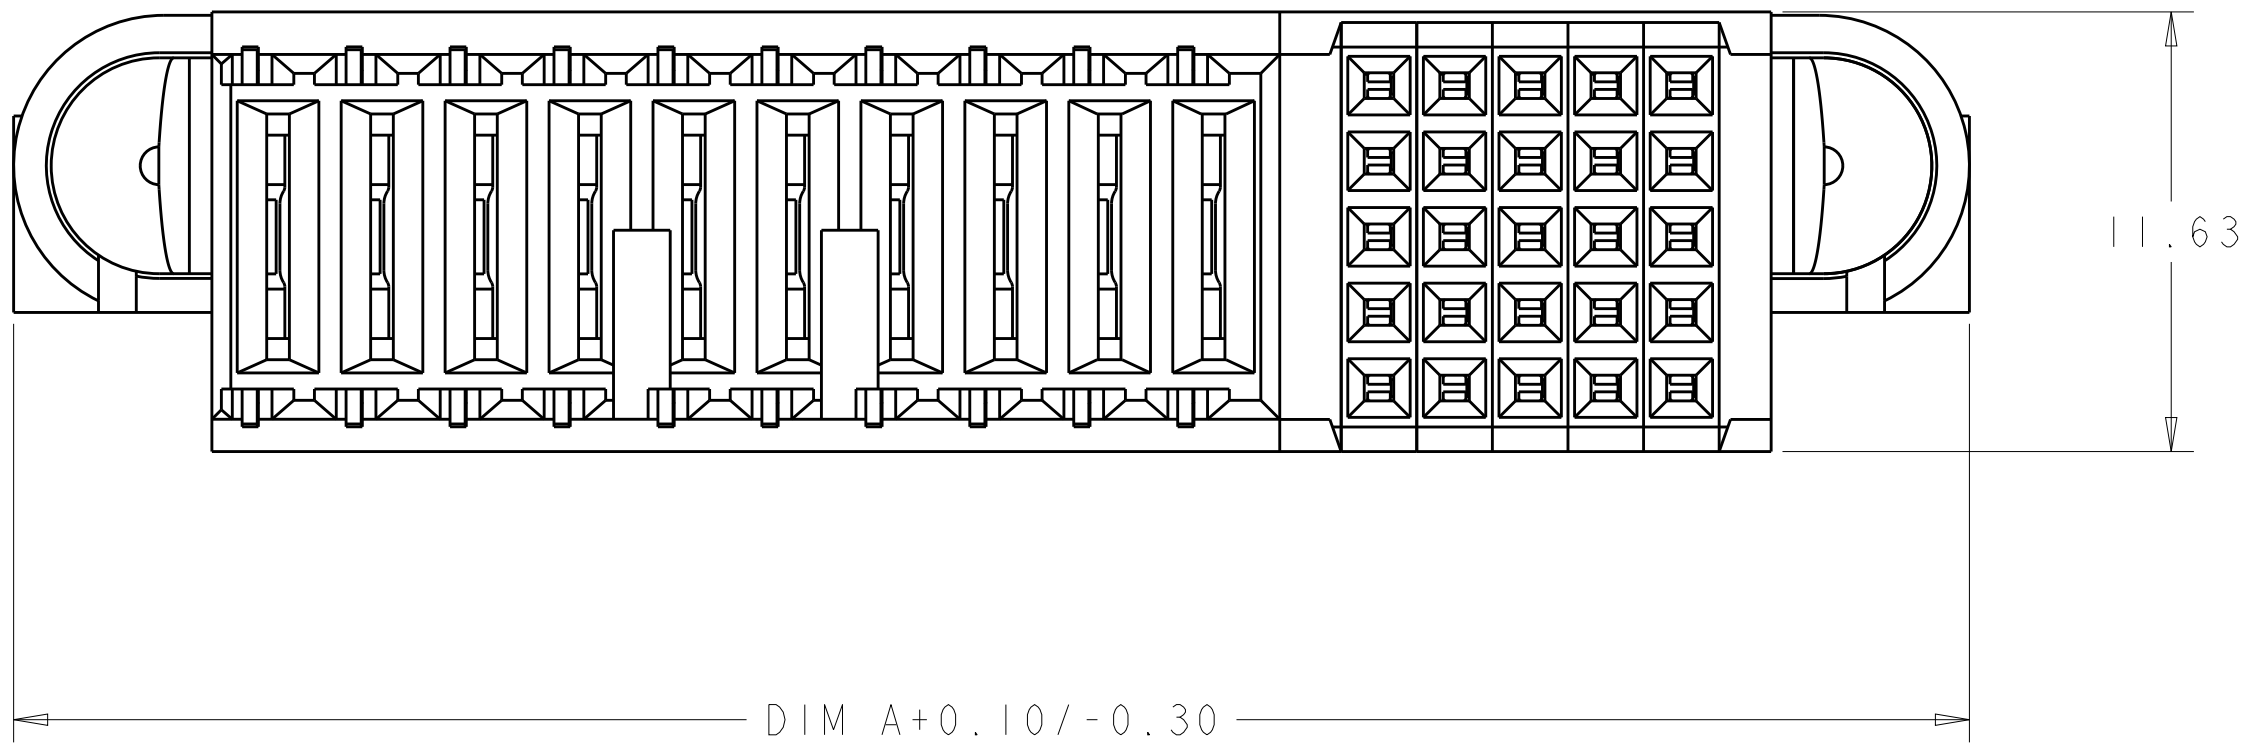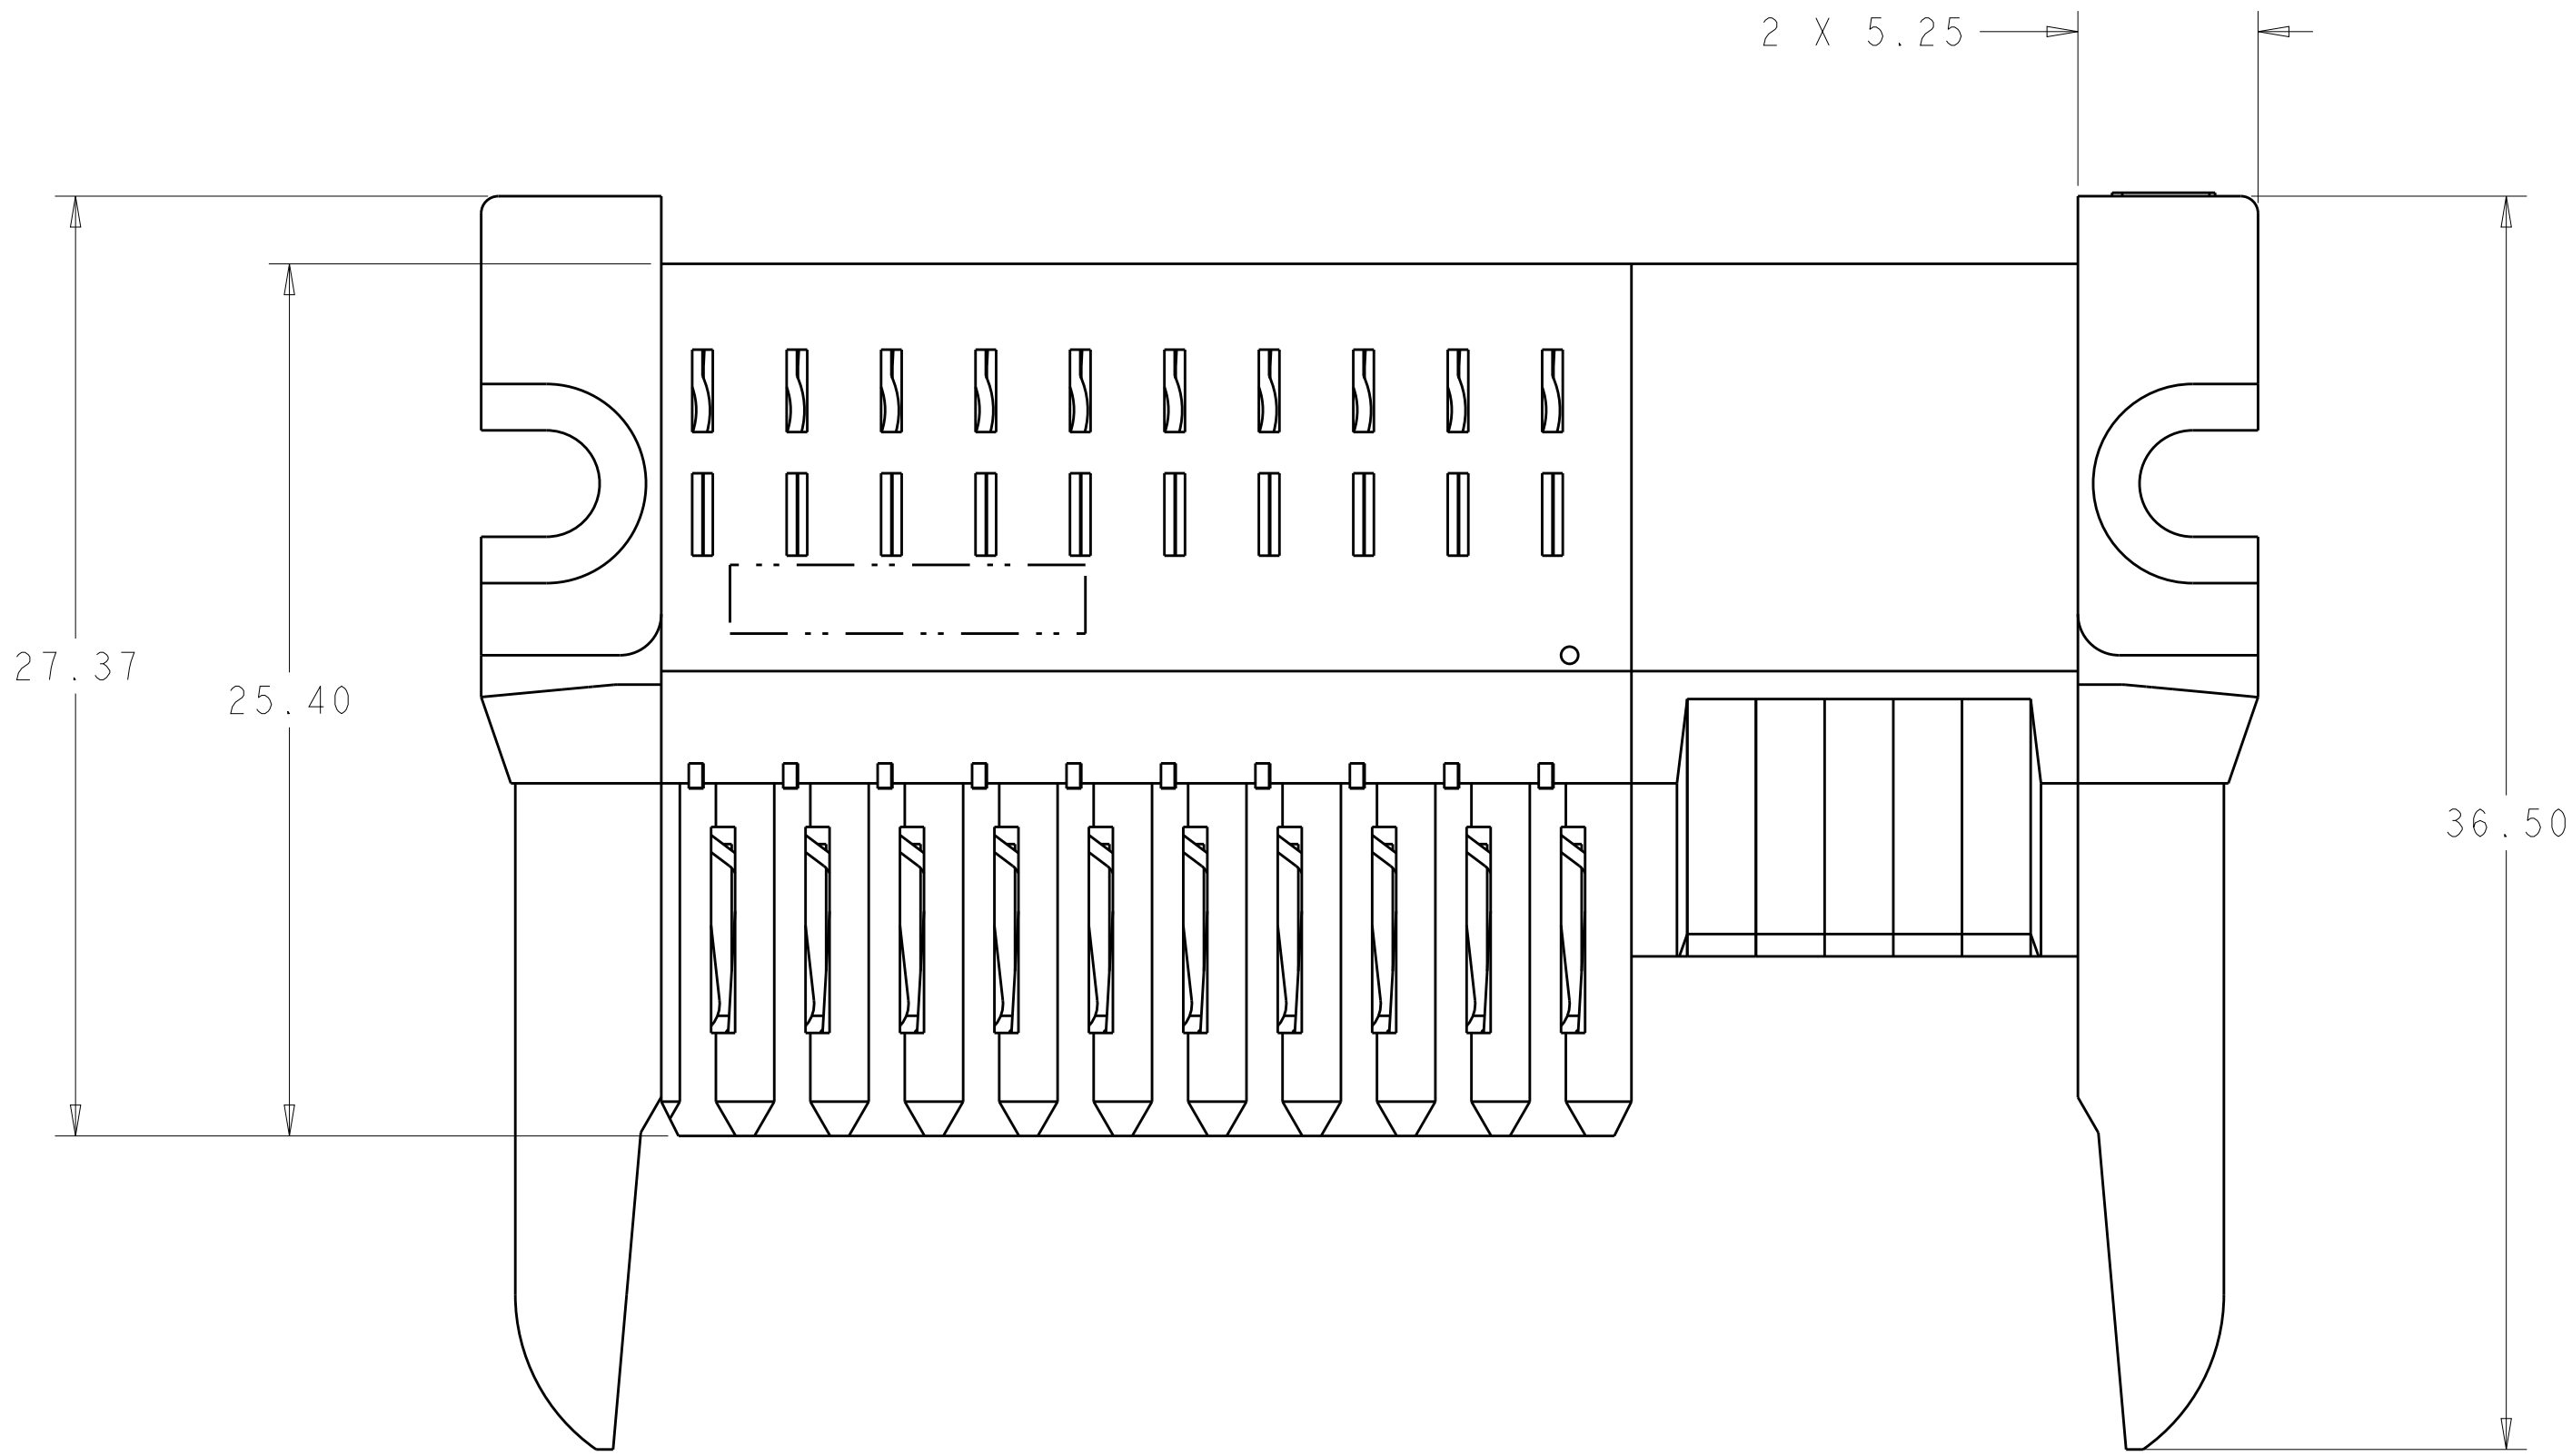

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND SHOULD BE CONTROLLED BY THE ISSUING ORGANIZATION. SHOULD BE CONTROLLED FOR THE LATEST REVISION.		DWN	ORANDO LI	28OCT2011	Tyco Electronics Shanghai, PR 200233	
		CHK	SUNY ZHAO	28OCT2011		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
mm		0 PLC ±		SUNY ZHAO	RECEPTACLE ASSEMBLY, RIGHT ANGLE,	
		1 PLC ±0.13		PRODUCT SPEC	PASSIVE GUIDE, SIGNAL/POWER,	
		2 PLC ±		108-2325	WITH SCREW MOUNT, MINIPAK HDL	
		3 PLC ±		APPLICATION SPEC		
		4 PLC ±		114-13215		
ANGLES		FINISH		SIZE	CAGE CODE	
MATERIAL		SEE NOTE 1		114-13215	DRAWING NO	
				WEIGHT	RESTRICTED TO	
				Customer Drawing	A100779C=1926739	
				SCALE	3:1	
				SHEET	2 OF 3	
				REV	A4	



THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYPKO ELECTRONICS CORPORATION IT IS SUBJECT TO THE COMPANY'S POLICY ON CONTROL AND THE USER ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN ORLANDO LI 280C21011		Tyco Electronics Shanghai, PR 200233	
DIMENSIONS: mm		CW SUNY ZHAO 280C21011		NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, PASSIVE GUIDE, SIGNAL/POWER, WITH SCREW MOUNT, MINIPAK HDL	
		APVD SUNY ZHAO 280C21011		PRODUCT SPEC 108-2325	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± 4 PLC ANGLES ±		APPLICATION SPEC 114-13215		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 00779 C=1926739 -	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 2		WEIGHT -	
Customer Drawing				SCALE 3:1 SHEET 3 OF 3 REV A4	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9