


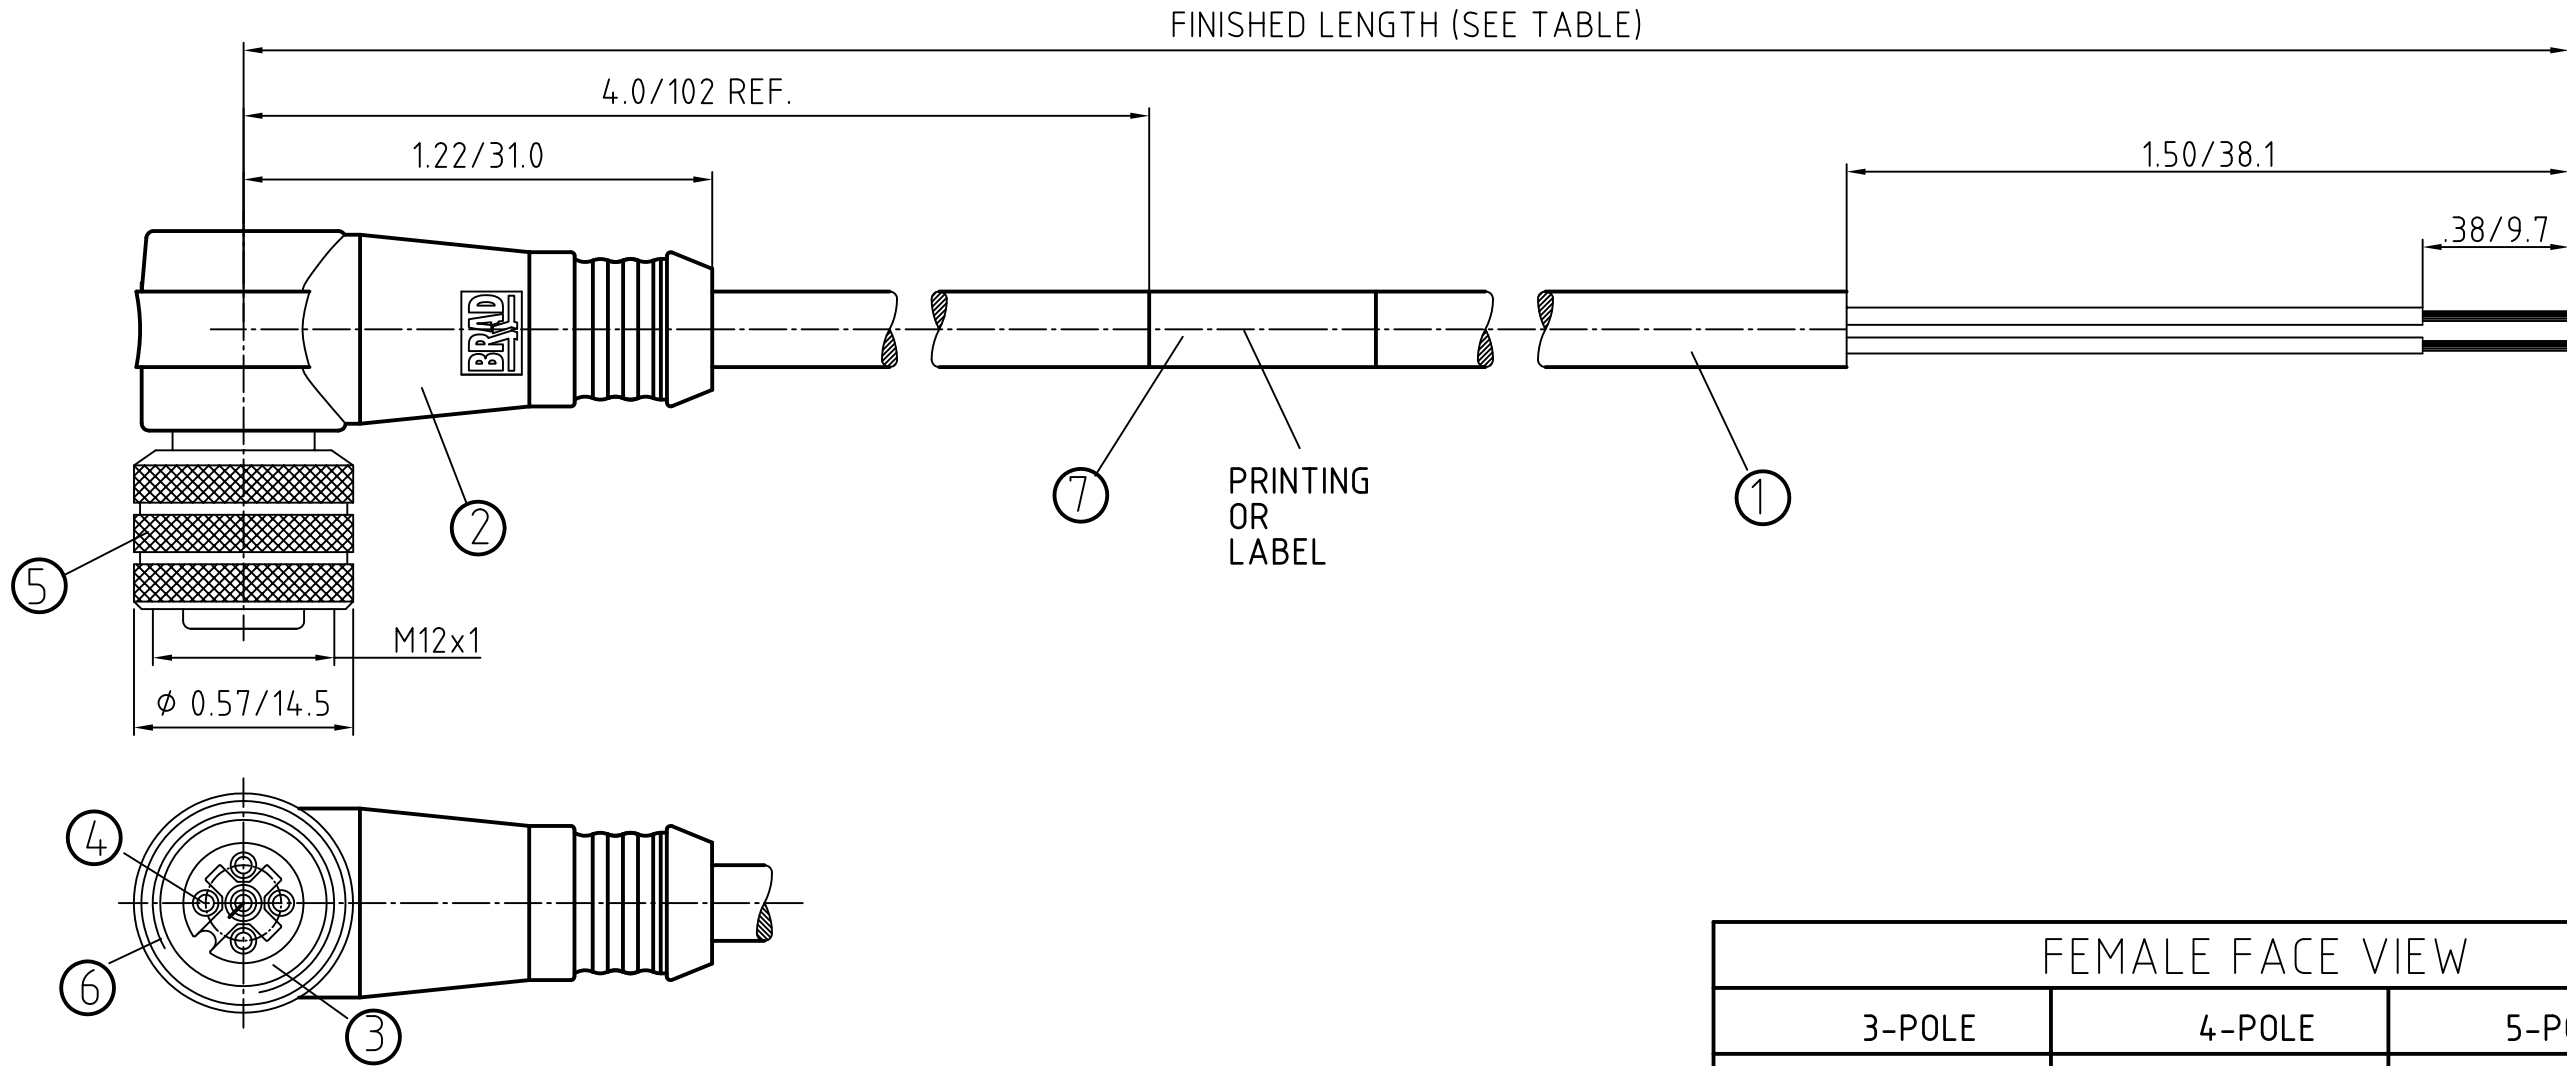


CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

FEMALE FACE VIEW		
3-POLE	4-POLE	5-POLE
WIRING DIAGRAM		
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: NS APPR: NSTAUDIG 2010/01/25		QUALITY SYMBOLS	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
							IN/MM		2:1	METRIC			
				 = 0  = 0		mm	INCH	DRAWN BY DATE		MICRO-CHANGE CORDSET 3/4/5-POL FEMALE 90 SE 22/3-5 YELLOW PVC CABLE			
					4 PLACES	±---	±---	----	----				
					3 PLACES	±---	±---	CHECKED BY DATE	RE 2010/01/21				
2 PLACES	±---	±.01	APPROVED BY DATE		 MOLEX INCORPORATED								
1 PLACE	±0.3	±---	NSTAUDIG 2010/01/25										
ANGULAR ± --- °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE SHEET 2		SD-120065-027		1 OF 1						
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

F

E

D

C

B

A

F

E

D

C

B

A

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651444	803001A09M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651551	804001A09M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651555	804001A09M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651558	804001A09M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651562	804001A09M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651567	804001A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200651697	805001A09M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200651700	805001A09M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651701	805001A09M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200651703	805001A09M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200651706	805001A09M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: NS APPR: NSTAUDIG 2010/01/25	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-POL FEMALE 90 SE 22/3-5 YELLOW PVC CABLE			
			4 PLACES	±---	±---	----	----				
			3 PLACES	±---	±---	CHECKED BY	DATE				
			2 PLACES	±---	±.01	RE	2010/01/21				
			1 PLACE	±0.3	±---	APPROVED BY	DATE		MOLEX INCORPORATED		
			ANGULAR ± --- °			NSTAUDIG	2010/01/25				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						SEE TABLE		SD-120065-027		1 OF 1	
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9