

NOTES :

1- MATERIAL : POLYESTER FIBER GLASS FILED 94-V-0
COLOR BLACK .

TERMINAL : PHOSPHOR BRONZE .


PLATINGS : FINISH 2

POST PLATE (0.00127-0.00152)/.000050-.000060

GOLD IN CONTACT AREA .

(0.00190)/.000075 MIN. PURE TIN IN TAIL AREA BOTH

OVER (0.00127)/.000050 MIN. NICKEL OVERALL .



2- PC BOARD THICKNESS : (1.57) / .062 .

3- JACK FOR MATING WITH F.C.C. 68 PLUGS 90075 MOLEX SERIES .





4- PRODUCT SPECIFICATION PS-95009.

5- APPLICATION SPECIFICATION AS-95001.


6- PACKAGING SPECIFICATION PK-95029.

MOUNTING HOLE PATTERNS


(SEE FROM COMPONENT SIDE)

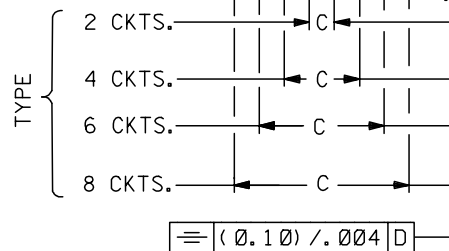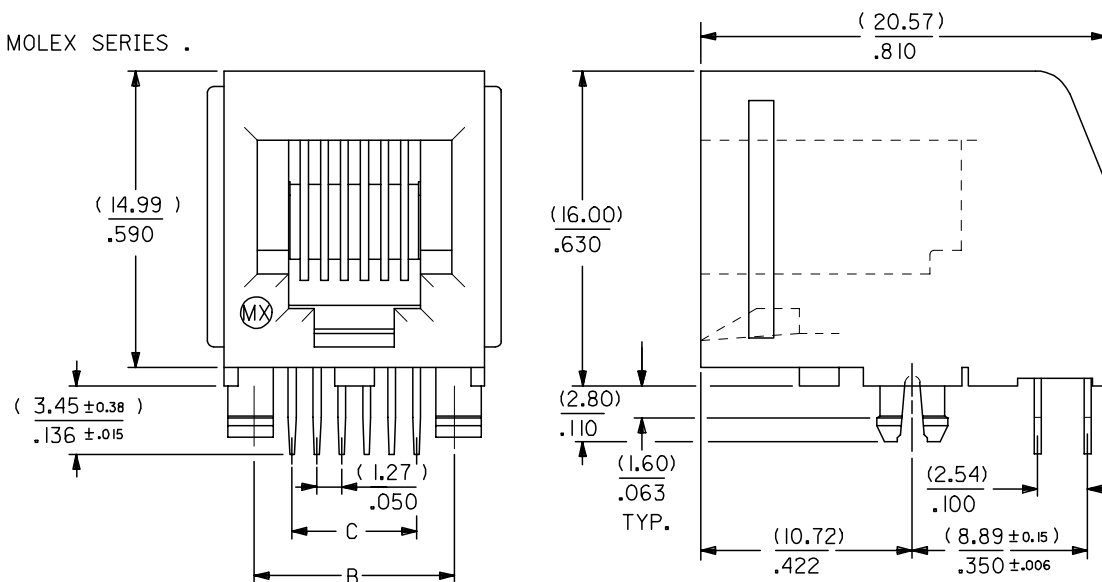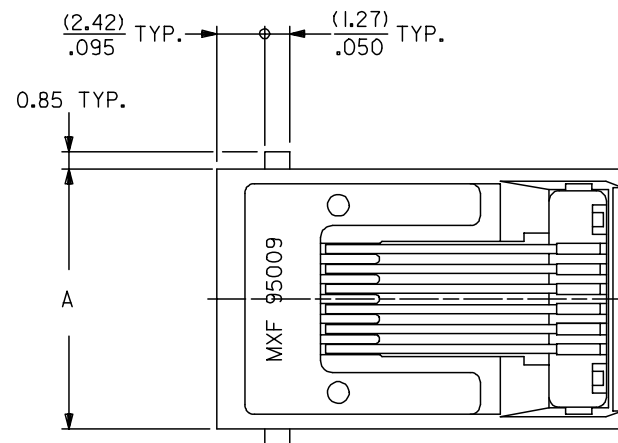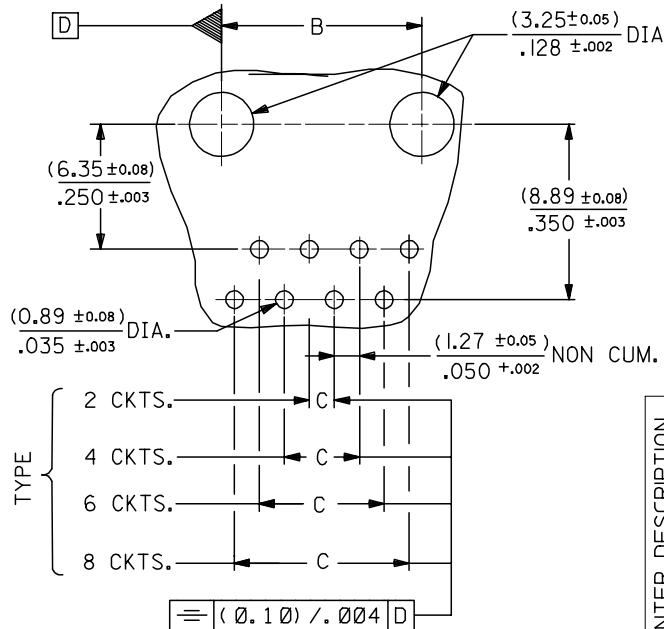


ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: MG2005-0155		DRAWN:CEBASTI 2004/11/12		mm		MM/IN		4:1		METRIC		⊙ □	
CHKD:FCARABET 2004/11/15		APPR:KNOLLER 2004/11/15		4 PLACES ± --- ± ---		DRAWN BY DATE		DP 86/10/23		TITLE		FLUSH MOUNT RIGHT ANGLE	
				3 PLACES ± --- ± .010		CHECKED BY DATE				MODULAR JACK ASSEMBLY			
				2 PLACES ± 0.25 ± .014		APPROVED BY DATE				THROUGH HOLE VERSION			
				1 PLACE ± 0.35 ± ---						MOLEX INCORPORATED			
				ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SDA-95009-F		SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART SHT 2						1 OF 4	
						SIZE A3							

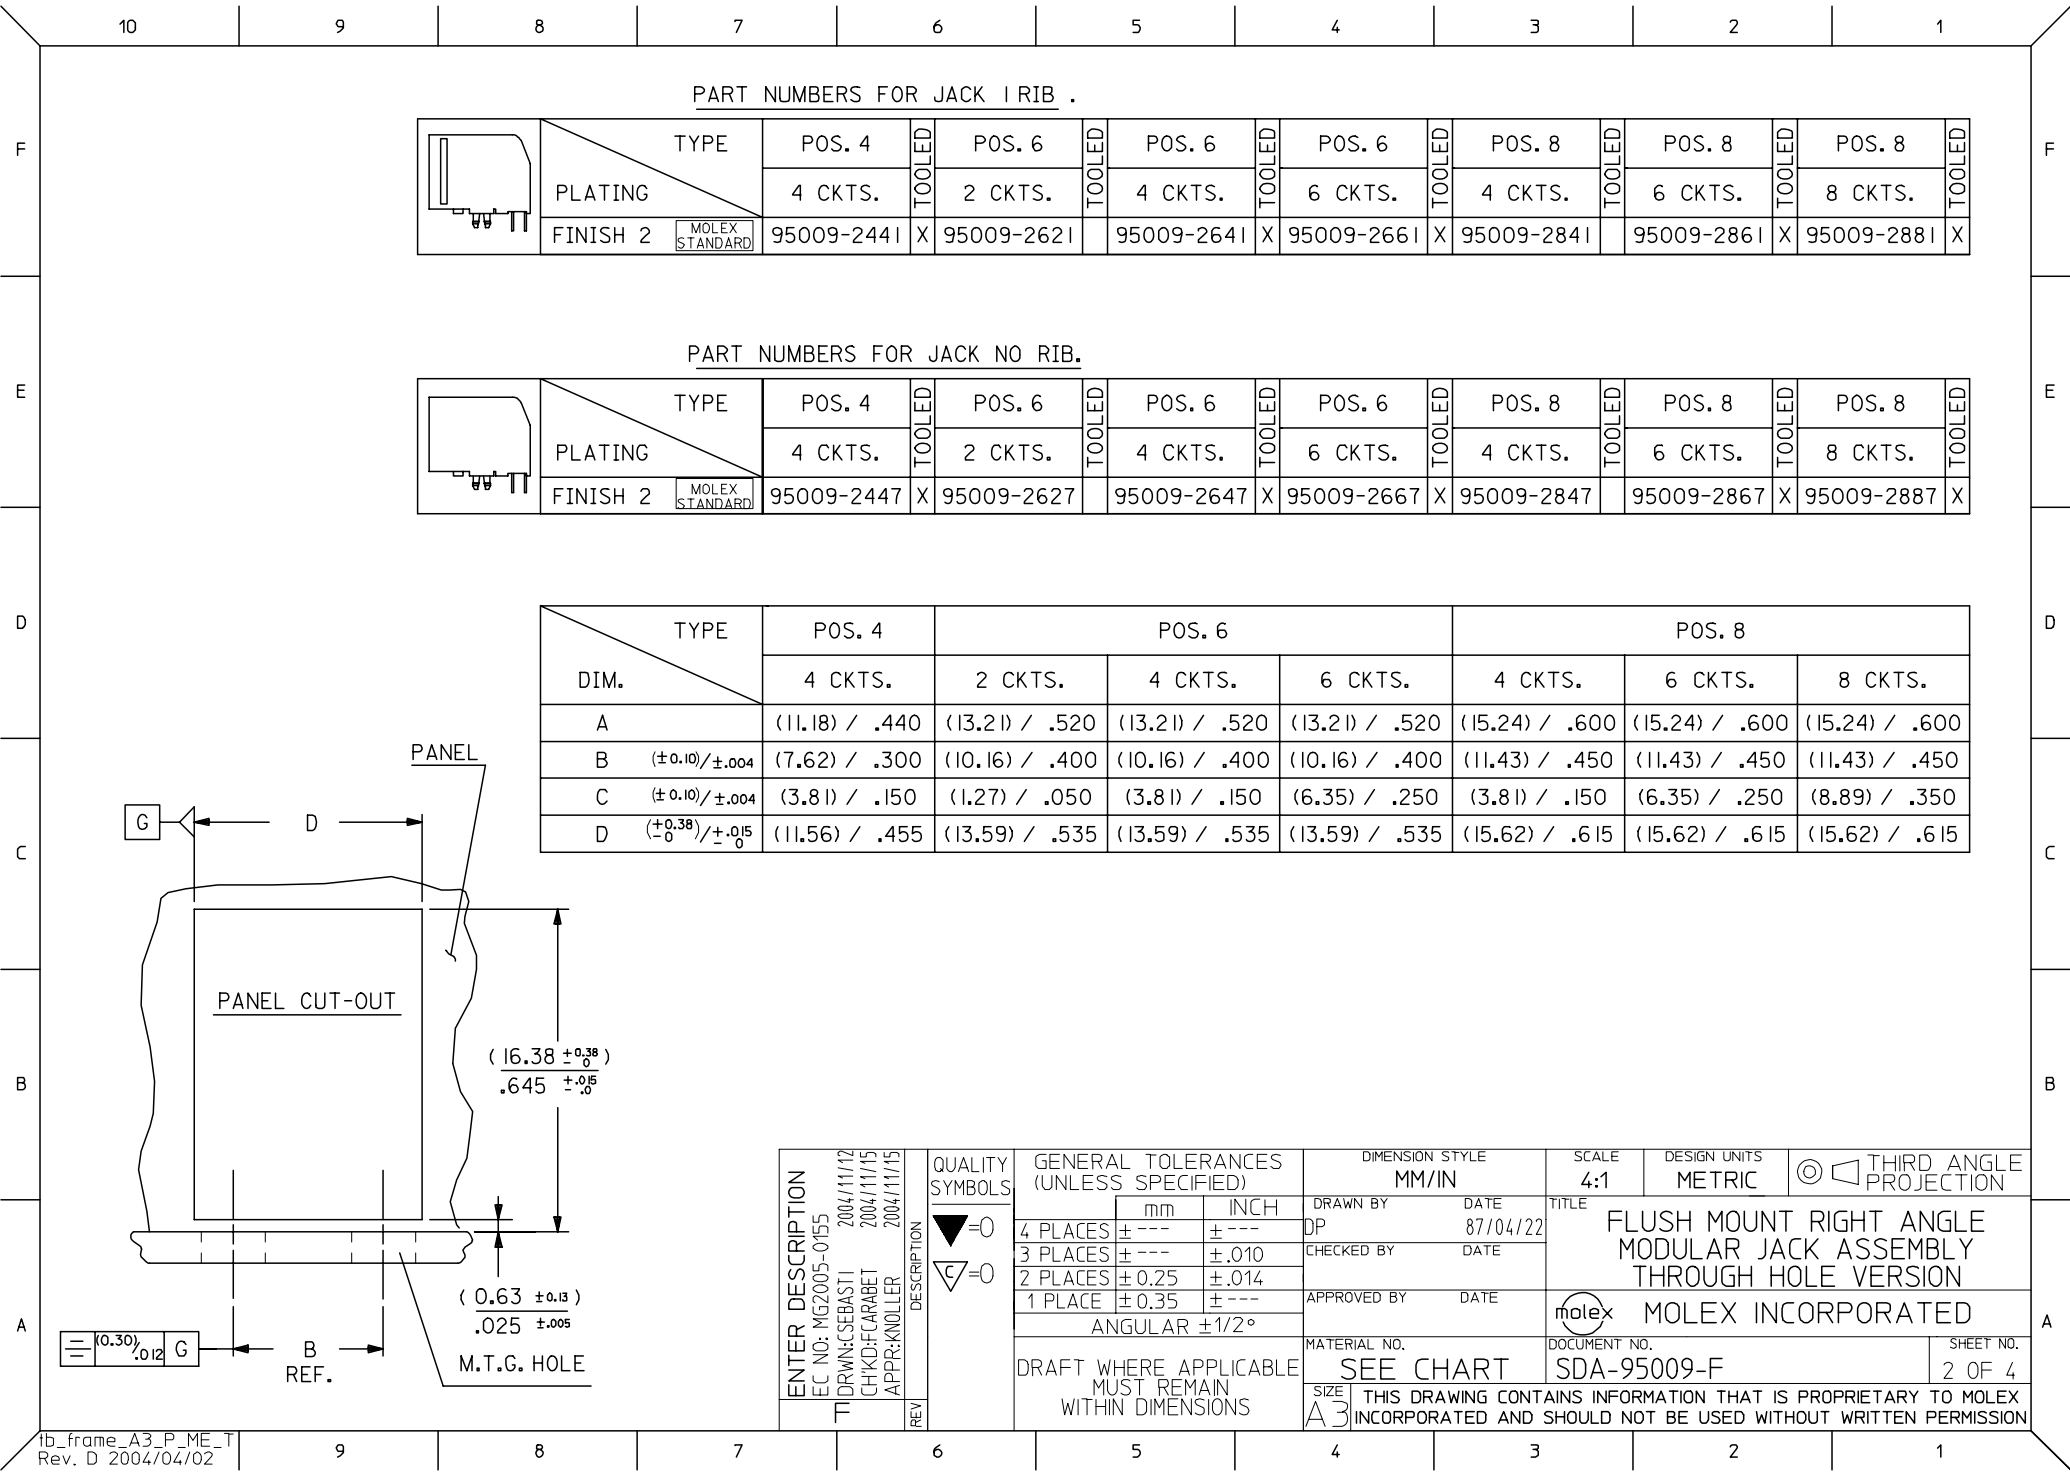


PART NUMBERS FOR JACK I RIB .

	TYPE	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8	TOOLED	POS. 8	TOOLED	POS. 8	TOOLED
		4 CKTS.		2 CKTS.		4 CKTS.		6 CKTS.		4 CKTS.		6 CKTS.		8 CKTS.	
		FINISH 2		95009-244I	X	95009-262I		95009-264I	X	95009-266I	X	95009-284I		95009-286I	X

PART NUMBERS FOR JACK NO RIB.

	TYPE	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8	TOOLED	POS. 8	TOOLED	POS. 8	TOOLED
		4 CKTS.		2 CKTS.		4 CKTS.		6 CKTS.		4 CKTS.		6 CKTS.		8 CKTS.	
		FINISH 2		95009-2447	X	95009-2627		95009-2647	X	95009-2667	X	95009-2847		95009-2867	X

DIM.	TYPE	POS. 4	POS. 6				POS. 8		
		4 CKTS.	2 CKTS.	4 CKTS.	6 CKTS.		4 CKTS.	6 CKTS.	8 CKTS.
A		(11.18) / .440	(13.21) / .520	(13.21) / .520	(13.21) / .520		(15.24) / .600	(15.24) / .600	(15.24) / .600
B	(±0.10)/±.004	(7.62) / .300	(10.16) / .400	(10.16) / .400	(10.16) / .400		(11.43) / .450	(11.43) / .450	(11.43) / .450
C	(±0.10)/±.004	(3.81) / .150	(1.27) / .050	(3.81) / .150	(6.35) / .250		(3.81) / .150	(6.35) / .250	(8.89) / .350
D	(+0.38/-0)/±.015	(11.56) / .455	(13.59) / .535	(13.59) / .535	(13.59) / .535		(15.62) / .615	(15.62) / .615	(15.62) / .615

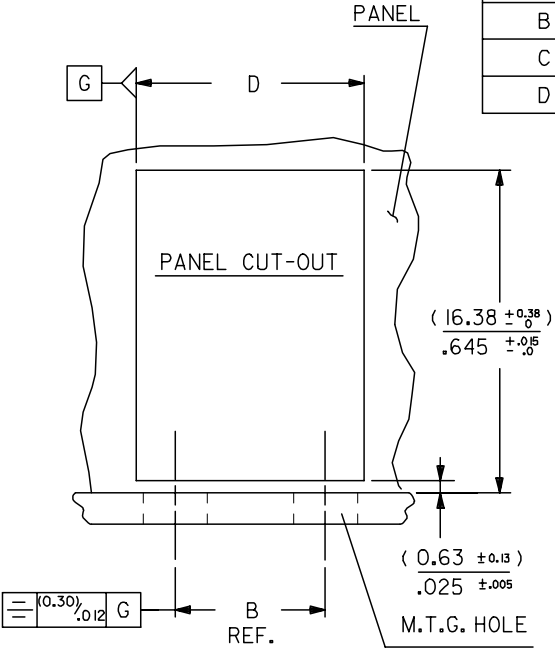

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9