

THIS DRAWING AND THE INFORMATION SET FORTH HERE-ON ARE THE PROPERTY OF TYCO ELECTRONICS AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS IS PROHIBITED.


| REVISIONS |                                     |             |          |
|-----------|-------------------------------------|-------------|----------|
| LTR       | DESCRIPTION                         | DATE        | APPROVED |
| C2        | ADMINISTRATIVE CHANGE ECO-11-012135 | Jun/13/2011 | M.HIGGY  |
| D         | REVISED PER ECO-12-021589           | Dec/11/2012 | G.WELLS  |

# SCOPE:

THIS SPECIFICATION PROVIDES A DESCRIPTION OF HEAT SHRINKABLE METAL RINGS FOR TERMINATING BRAIDED SHIELD ONTO ADAPTORS DESIGNED FOR THAT PURPOSE.

If this document is printed it becomes uncontrolled. Check for the latest revision

## PART DESCRIPTION:

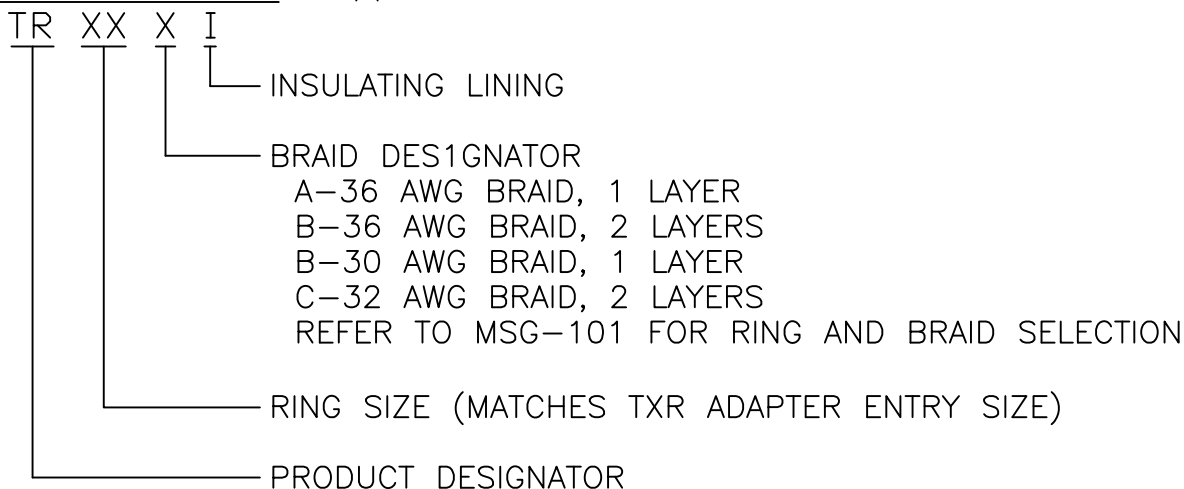

## NOTES:

- 1 MATERIAL: NICKEL/TITANIUM HEAT RECOVERABLE SHAPE MEMORY ALLOY
- 2 THE OUTSIDE SURFACE OF THE RING IS MARKED WITH TWO STRIPES OF THERMOCHROMIC PAINT WHICH CHANGE COLOR WHEN THE APPROPRIATE INSTALLATION TEMPERATURE IS REACHED.
- 3 "AI" RINGS ARE IDENTIFIED BY THE ABSENCE OF A RED OR BLUE DOT. REFER TO NOTE 4.
- 4 "BI" RINGS ARE MARKED WITH A RED DOT.  
"CI" RINGS ARE MARKED WITH A BLUE DOT.
5. REFER TO MIP-101 FOR INSTALLATION PROCEDURE.
6. REFER TO MPS-101 FOR PERFORMANCE REQUIREMENTS.

DIMENSIONING AND TOLERANCING PER ASME Y14.5M (ISO STANDARDS)

© 2008-2012 Tyco Electronics. All Rights Reserved.

Raychem Adapters  
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE INCHES. METRIC  
DIMENSIONS ARE IN BRACKETS.

### DECIMAL TOLERANCES

.XXX ± -- [ mm]  
.XX ± -- [ mm]  
.X ± -- [ mm]

### ANGLE TOLERANCE


.X ± --

DRAWN  
E. Goldy  
DATE  
05-17-93

CHECKED  
\_\_\_\_\_  
DATE  
\_\_\_\_\_  
APPROVED  
W.C. Gay  
DATE  
5-26-93

CAD FILE:  
TR-CD

THIRD ANGLE  
PROJECTION



TE Connectivity

TITLE

TINEL-LOCK RING

SIZE

CAGE CODE:

DWG. NO.

TR

REV:

D

SCALE: NONE

SHEET 1 OF 2

| PART<br>DESCRIPTION | $\phi A$           |                       | $\phi D$             |
|---------------------|--------------------|-----------------------|----------------------|
|                     | MIN AS<br>SUPPLIED | MAX FREE<br>RECOVERED |                      |
| TR04AI              | .397 [10.08]       | .379 [9.63]           | .073±.005 [1.85±.13] |
| TR04BI              | .416 [10.57]       | .398 [10.11]          | .073±.005 [1.85±.13] |
| TR05AI              | .460 [11.68]       | .440 [11.18]          | .073±.005 [1.85±.13] |
| TR05BI              | .479 [12.17]       | .458 [11.63]          | .073±.005 [1.85±.13] |
| TR06AI              | .523 [13.28]       | .499 [12.68]          | .073±.005 [1.85±.13] |
| TR06BI              | .548 [13.92]       | .523 [13.28]          | .073±.005 [1.85±.13] |
| TR07AI              | .586 [14.88]       | .559 [14.20]          | .073±.005 [1.85±.13] |
| TR07BI              | .606 [15.39]       | .578 [14.68]          | .073±.005 [1.85±.13] |
| TR08AI              | .650 [16.51]       | .620 [15.75]          | .073±.005 [1.85±.13] |
| TR08BI              | .670 [17.02]       | .639 [16.23]          | .073±.005 [1.85±.13] |
| TR10AI              | .782 [19.86]       | .744 [18.90]          | .073±.005 [1.85±.13] |
| TR10BI              | .802 [20.37]       | .763 [19.38]          | .073±.005 [1.85±.13] |
| TR10CI              | .830 [21.08]       | .791 [20.09]          | .073±.005 [1.85±.13] |
| TR12AI              | .912 [23.17]       | .867 [22.02]          | .073±.005 [1.85±.13] |
| TR12BI              | .931 [23.65]       | .886 [22.50]          | .073±.005 [1.85±.13] |
| TR12CI              | .960 [24.38]       | .912 [23.17]          | .073±.005 [1.85±.13] |
| TR14AI              | 1.040 [26.42]      | .988 [25.10]          | .073±.005 [1.85±.13] |
| TR14BI              | 1.060 [26.92]      | 1.007 [25.58]         | .073±.005 [1.85±.13] |
| TR14CI              | 1.089 [27.66]      | 1.033 [26.24]         | .073±.005 [1.85±.13] |
| TR16AI              | 1.171 [29.74]      | 1.111 [28.22]         | .073±.005 [1.85±.13] |
| TR16BI              | 1.191 [30.25]      | 1.129 [28.68]         | .073±.005 [1.85±.13] |
| TR16CI              | 1.216 [30.89]      | 1.154 [29.31]         | .073±.005 [1.85±.13] |
| TR18AI              | 1.301 [33.05]      | 1.234 [31.34]         | .073±.005 [1.85±.13] |
| TR18BI              | 1.320 [33.53]      | 1.252 [31.80]         | .073±.005 [1.85±.13] |
| TR20AI              | 1.430 [36.32]      | 1.357 [34.47]         | .073±.005 [1.85±.13] |
| TR20BI              | 1.450 [36.83]      | 1.376 [34.95]         | .073±.005 [1.85±.13] |
| TR22AI              | 1.543 [39.19]      | 1.463 [37.16]         | .084±.005 [2.13±.13] |
| TR22BI              | 1.561 [39.65]      | 1.481 [37.62]         | .084±.005 [2.13±.13] |
| TR24AI              | 1.673 [42.49]      | 1.587 [40.31]         | .084±.005 [2.13±.13] |
| TR24BI              | 1.691 [42.95]      | 1.605 [40.77]         | .084±.005 [2.13±.18] |
| TR28AI              | 1.932 [49.07]      | 1.838 [46.68]         | .084±.005 [2.13±.13] |
| TR28BI              | 1.950 [49.53]      | 1.858 [47.19]         | .084±.005 [2.13±.13] |

If this document is printed it becomes uncontrolled. Check for the latest revision

© 2008–2012 Tyco Electronics. All Rights Reserved.

Raychem Adapters  
CUSTOMER DRAWING

|                    |                    |             |                     |                |           |
|--------------------|--------------------|-------------|---------------------|----------------|-----------|
| DRAWN<br>E. Goldy  | DATE<br>05-17-1993 | SIZE<br>A   | CAGE CODE:<br>06090 | DWG. NO.<br>TR | REV:<br>D |
| CAD FILE:<br>TR-CD |                    | SCALE: NONE |                     | SHEET 2 OF 2   |           |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9