

# Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



**THIS PAGE INTENTIONALLY LEFT BLANK**



# HMC1041LC4

## GaAs MMIC I/Q MIXER 17 - 27 GHz

### Typical Applications


The HMC1041LC4 is Ideal for:

- Point-to-Point Radio
- Point-to-Multi-Point Radio
- Test Equipment & Sensors
- Military End Use

### Features

- Wide IF Bandwidth: DC - 3.5 GHz
- Image Rejection: 36 dB
- LO to RF Isolation 45 dB
- High Input IP3: +20 dBm
- 24 Lead 4x4 mm SMT Package: 16 mm<sup>2</sup>

### Functional Diagram

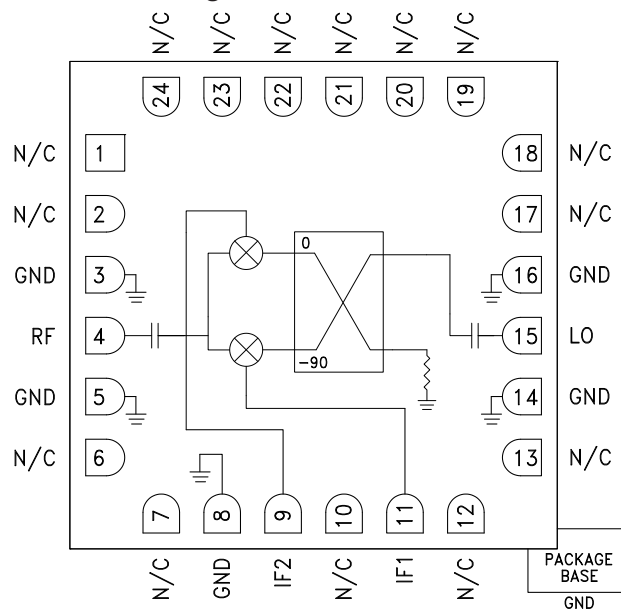

### General Description

The HMC1041LC4 is a compact I/Q MMIC mixer in a leadless "Pb free" SMT package, which can be used as either an Image Reject Mixer or a Single Sideband Upconverter. The mixer utilizes two standard Hittite double balanced mixer cells and a 90 degree hybrid fabricated in a GaAs MESFET process. A low frequency quadrature hybrid was used to produce a 1000 MHz USB IF output. This product is a much smaller alternative to hybrid style Image Reject Mixers and Single Sideband Upconverter assemblies. The HMC1041LC4 eliminates the need for wire bonding and allows the use of surface mount manufacturing techniques.

### Electrical Specifications, $T_A = +25\text{ }^\circ\text{C}$ , $IF = 1\text{ GHz}$ , $USB$ , $LO = +15\text{ dBm}$ <sup>[1]</sup>

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range, RF/LO	17 - 20			20 - 24			24 - 27			GHz
Frequency Range, IF	DC - 3.5			DC - 3.5			DC - 3.5			GHz
Conversion Loss (As IRM)		7	10		9	12		9	12	dB
Image Rejection	20	29		26	36		20	30		dB
LO to RF Isolation	40	45		38	43		34	39		dB
LO to IF Isolation		45			40			40		dB
IP3 (Input)		18			20			19		dBm
Amplitude Balance <sup>[2] [3]</sup>		±0.5			±0.5			±0.25		dB
Phase Balance <sup>[2] [3]</sup>		±2.5			±4.0			±1.5		Deg

[1] Unless otherwise noted, all measurements performed as downconverter.


[2] Data taken without external 90° hybrid.

[3] Data taken with IF = 100MHz




Data Taken As IRM with External IF 90° Hybrid, IF = 1000 MHz


**Conversion Gain, USB vs. Temperature**

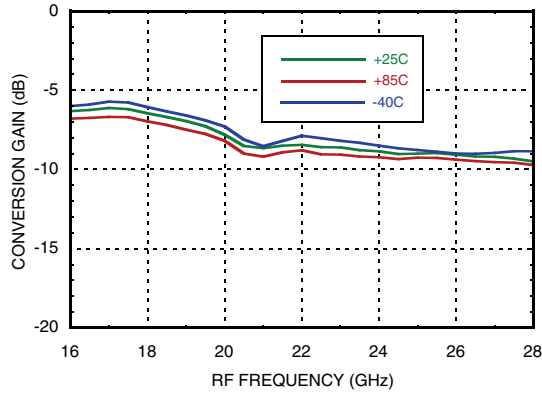


**Conversion Gain, USB vs. LO Drive**

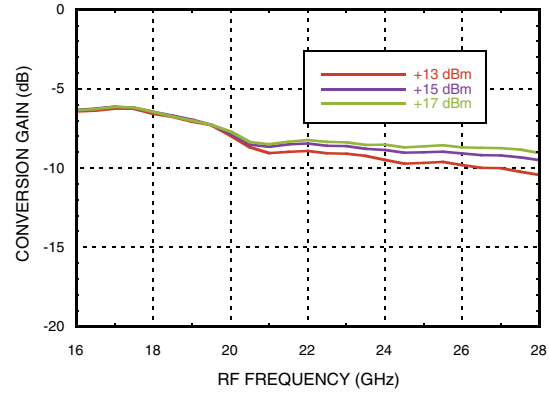


**Image Rejection, USB vs. Temperature**

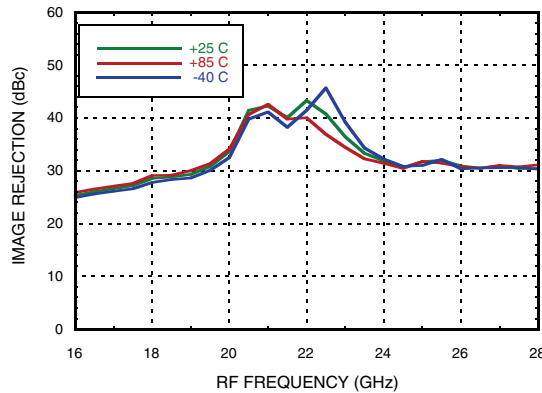


**Image Rejection, USB vs. LO Drive**

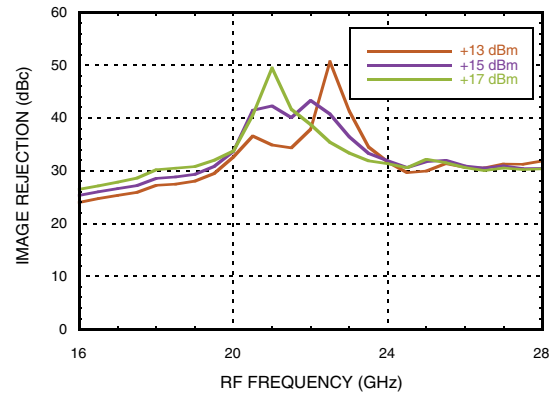

**Return Loss [1]**

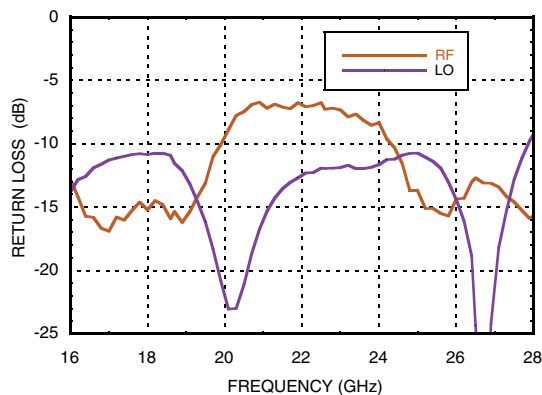

**Input P1dB, USB vs. Temperature**

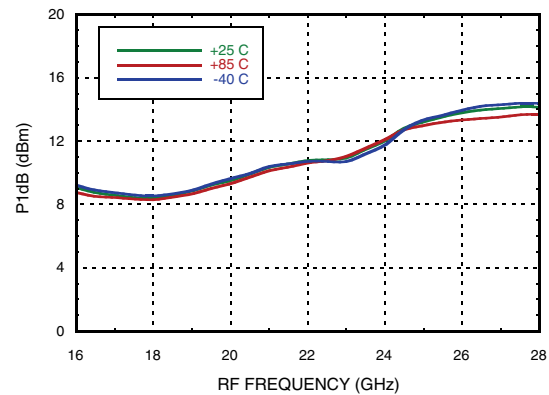


[1] Data taken without external 90° hybrid.




Data Taken As IRM with External IF 90° Hybrid, IF = 1000 MHz


**Input IP3, USB vs. Temperature**

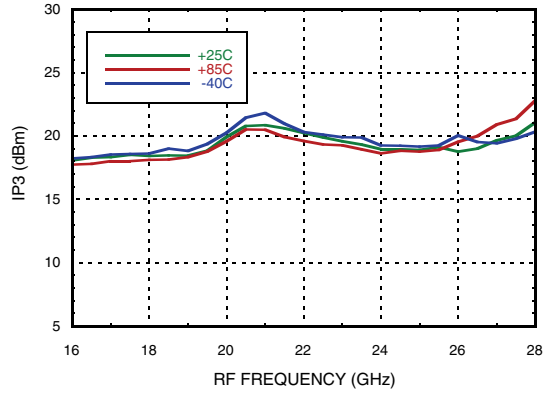


**Input IP3, USB vs LO Drive**

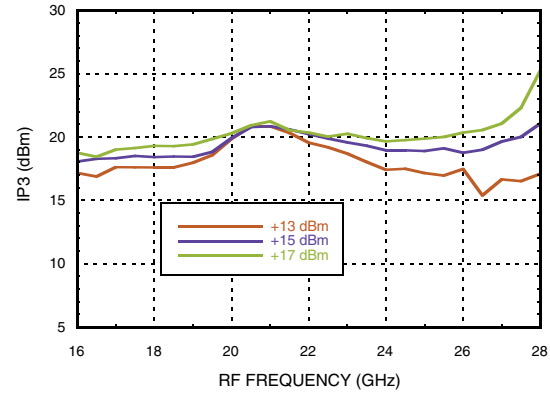


**Isolation**

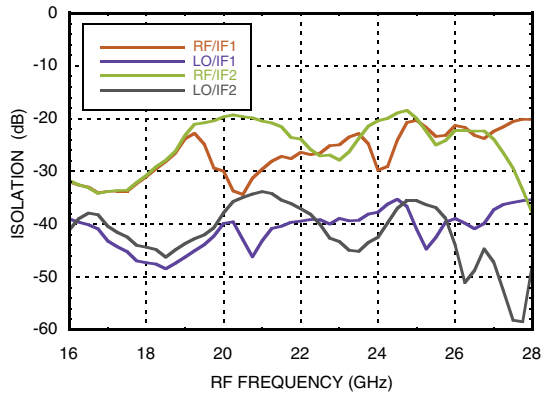


**LO/RF Isolation**

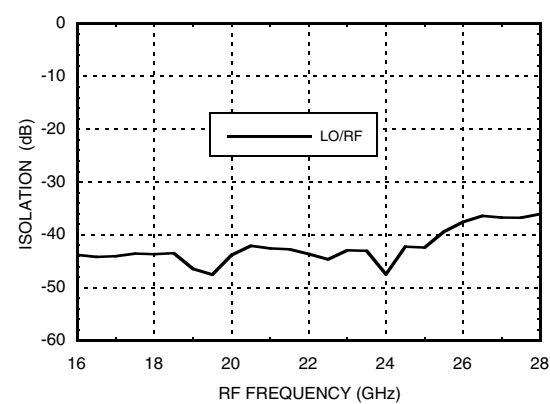

**IF Bandwidth [1]**

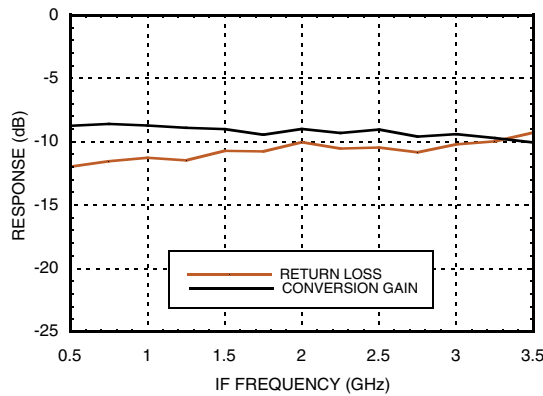

**Amplitude Balance, USB vs. LO Drive [1] [2]**

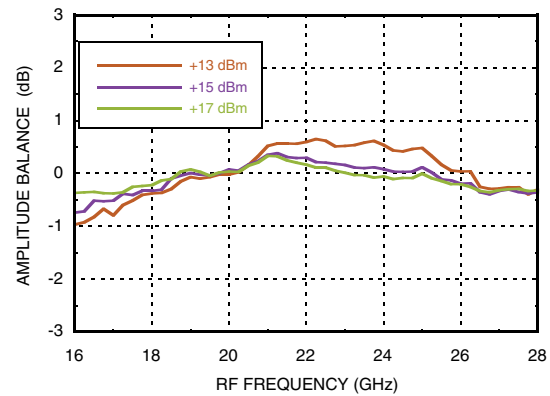


[1] Data taken without external 90° hybrid.

[2] Data taken with IF = 100MHz.




Data Taken As IRM with External IF 90° Hybrid, IF = 1000 MHz


**Phase Balance, USB vs. LO Drive** [1] [2]

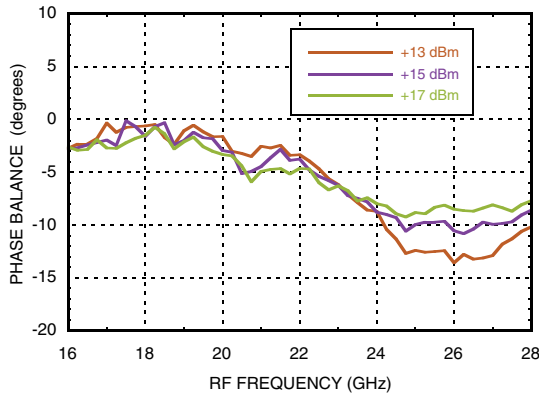


**Upconverter Performance Conversion Gain, USB vs. LO Drive**

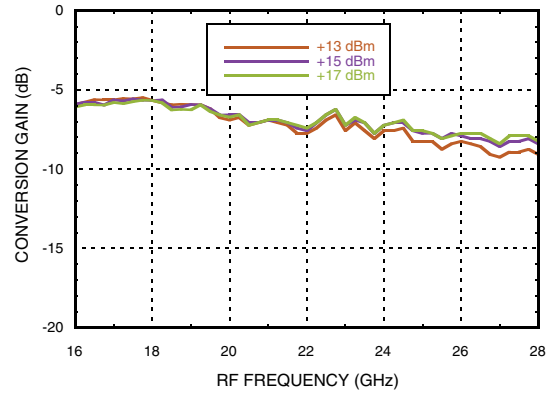


**Upconverter Performance Sideband Rejection, USB vs. LO Drive**

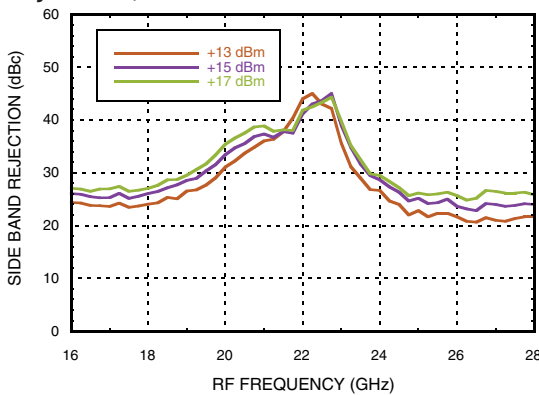


**Conversion Gain, LSB vs. Temperature**

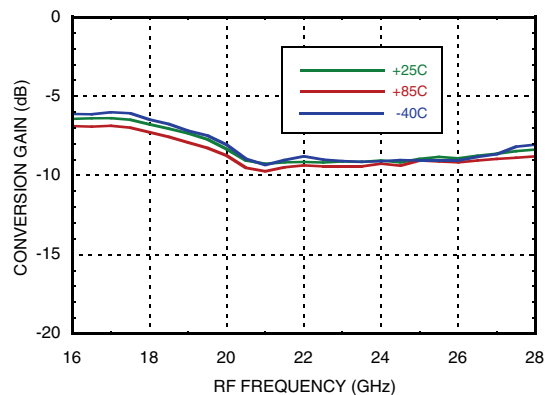

**Conversion Gain, LSB vs. LO Drive**

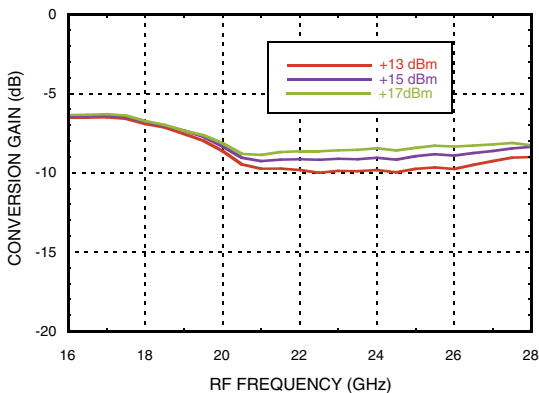

**Image Rejection, LSB vs. Temperature**

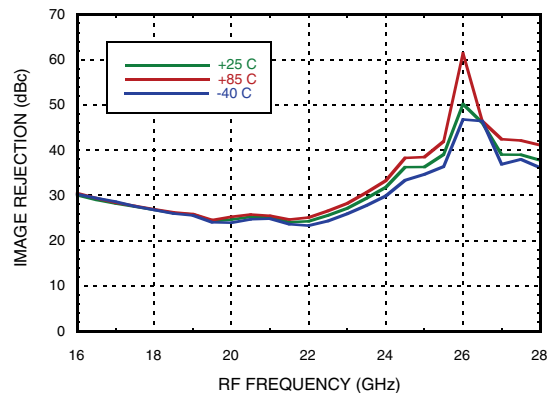


[1] Data taken without external 90° hybrid.

[2] Data taken with IF = 100MHz.




Data Taken As IRM with External IF 90° Hybrid, IF = 1000 MHz


**Image Rejection, LSB vs. LO Drive**

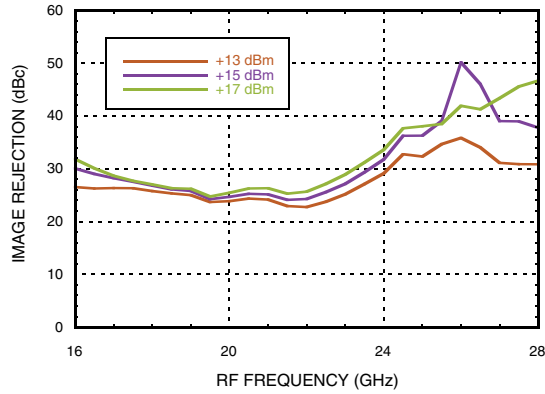


**Input P1dB, LSB vs. Temperature**

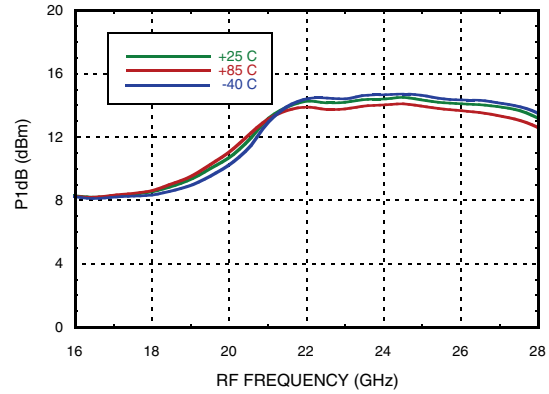


**Input IP3, LSB vs. Temperature**

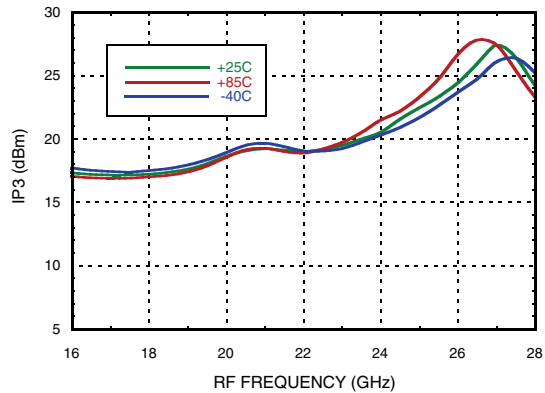


**Input IP3, LSB vs LO Drive**

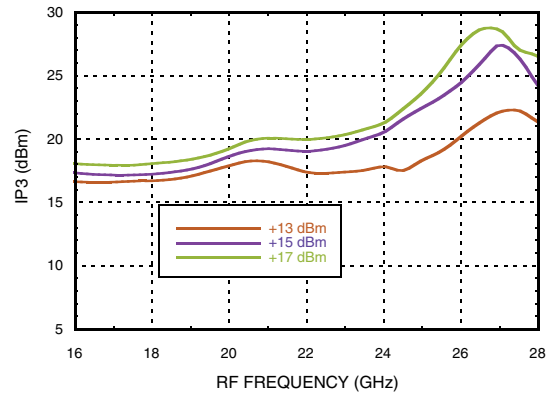

**Amplitude Balance, LSB vs. LO Drive [1] [2]**

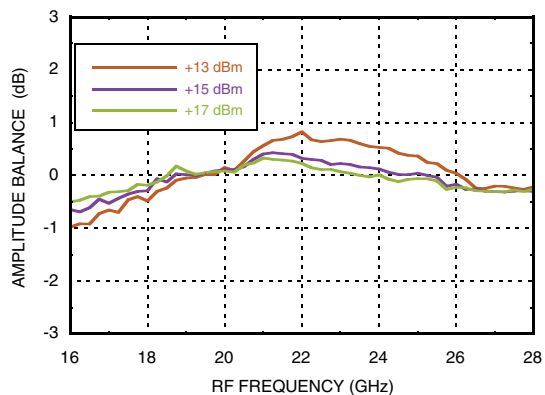

**Phase Balance, LSB vs. LO Drive [1] [2]**

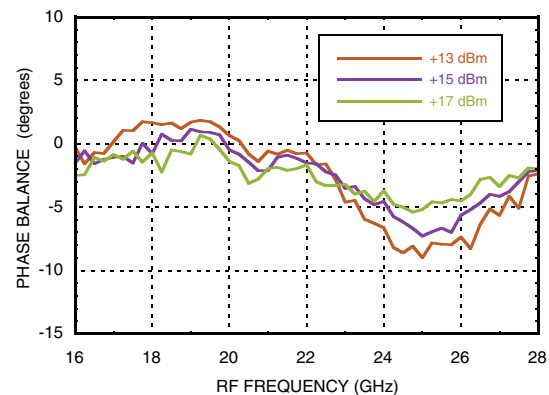


[1] Data taken without external 90° hybrid.

[2] Data taken with IF = 100MHz.




Data Taken As IRM with External IF 90° Hybrid, IF = 2000 MHz


**Conversion Gain, USB vs. Temperature**

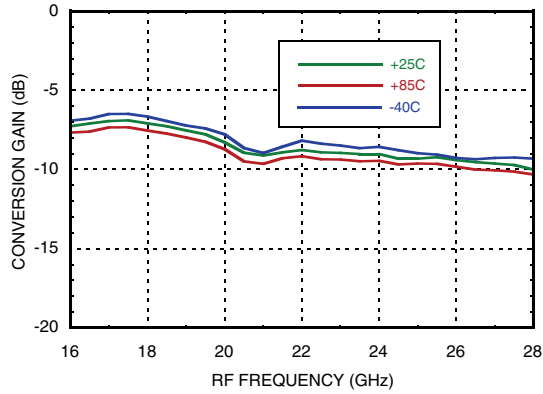


**Conversion Gain, USB vs. LO Drive**

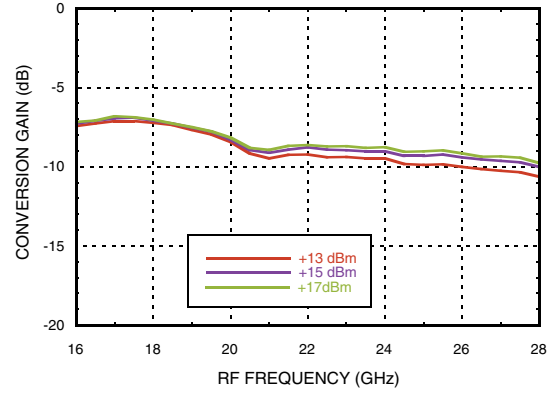


**Image Rejection, USB vs. Temperature**

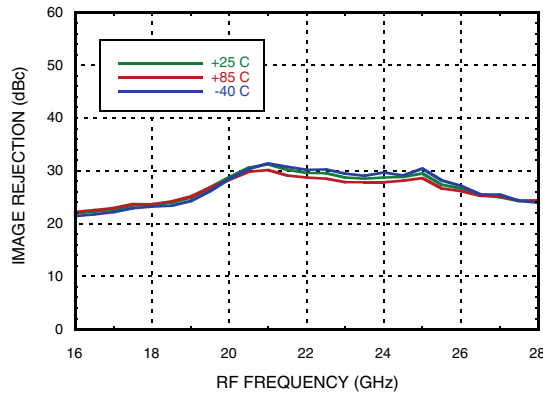


**Image Rejection, USB vs. LO Drive**

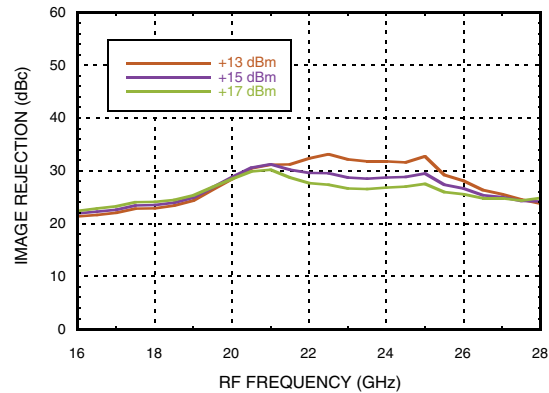

**Input P1dB, USB vs. Temperature**

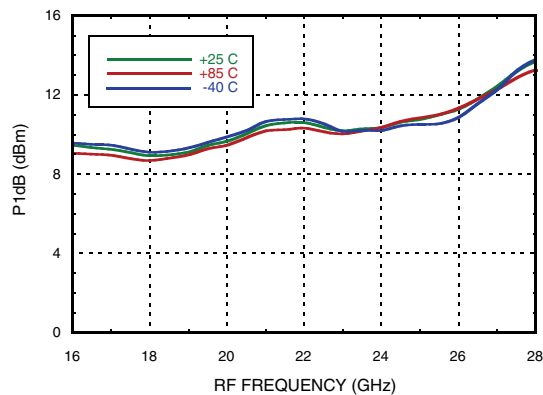

**Input IP3, USB vs. Temperature**

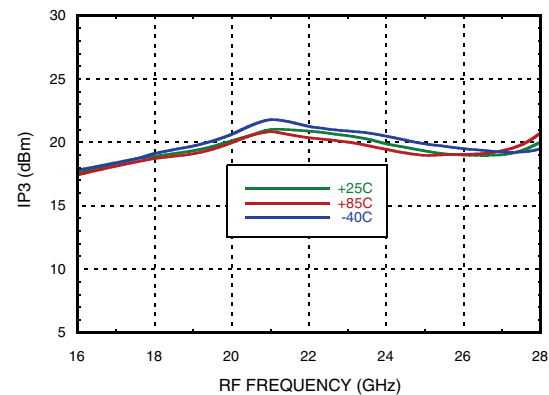







Data Taken As IRM with External IF 90° Hybrid, IF = 2000 MHz


**Input IP3, USB vs LO Drive**

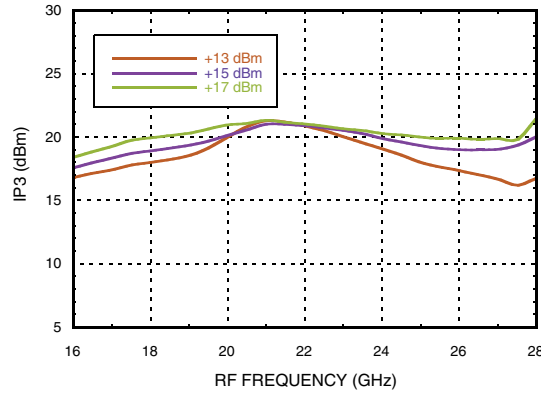


**Conversion Gain, LSB vs. Temperature**

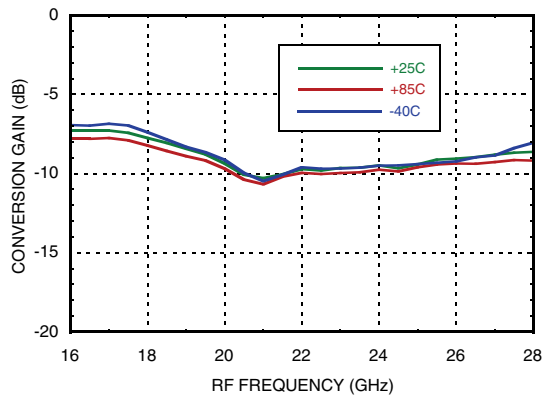


**Conversion Gain, LSB vs. LO Drive**

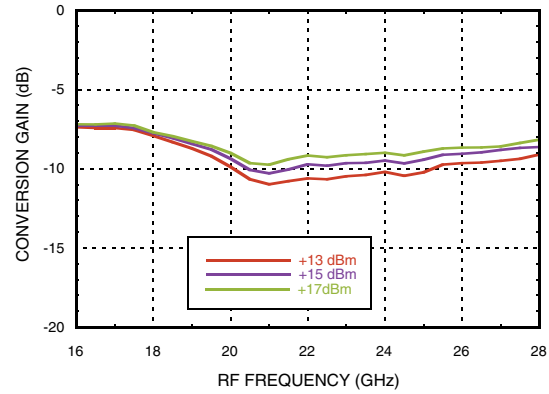

**Image Rejection, LSB vs. Temperature**

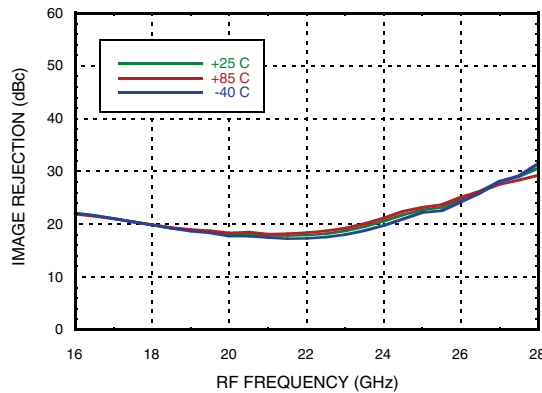


**Image Rejection, LSB vs. LO Drive**

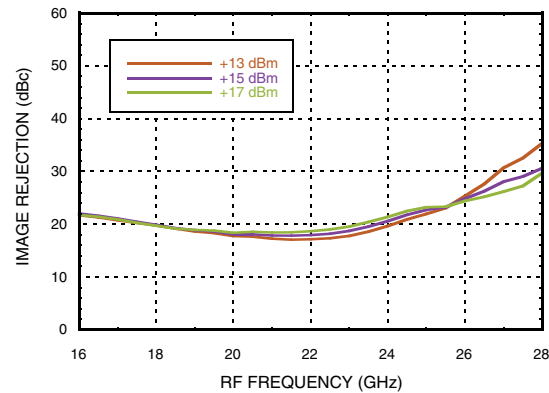




Data Taken As IRM with External IF 90° Hybrid, IF = 2000 MHz


**Input P1dB, LSB vs. Temperature**

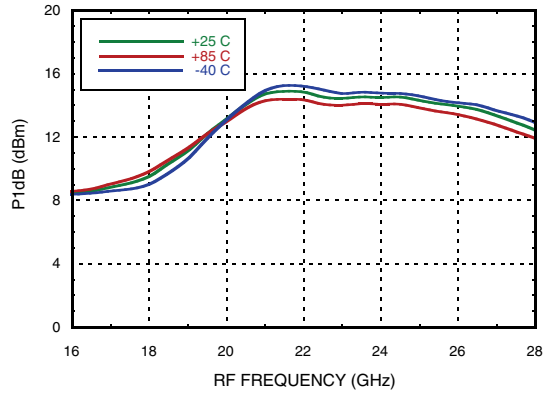

**Input IP3, LSB vs. Temperature**

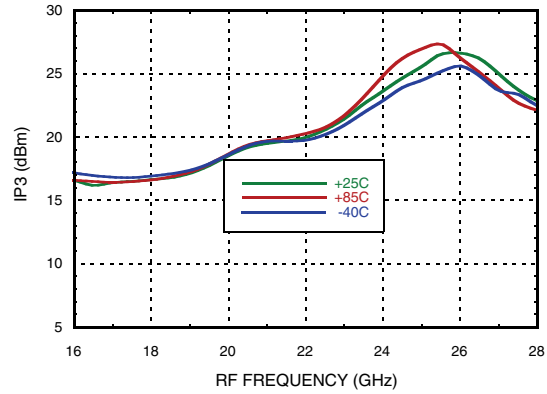


**Input IP3, LSB vs LO Drive**

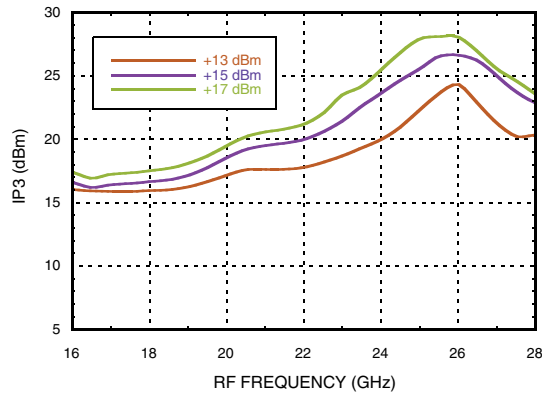




Data Taken As IRM with External IF 90° Hybrid, IF = 2500 MHz


**Conversion Gain, USB vs. Temperature**

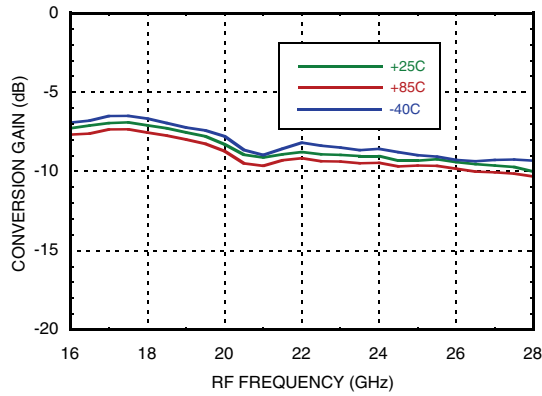


**Conversion Gain, USB vs. LO Drive**

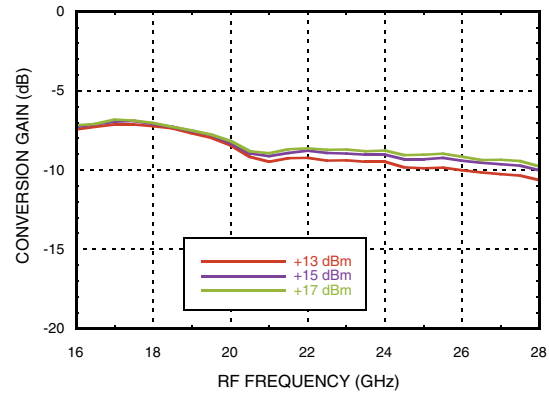


**Image Rejection, USB vs. Temperature**

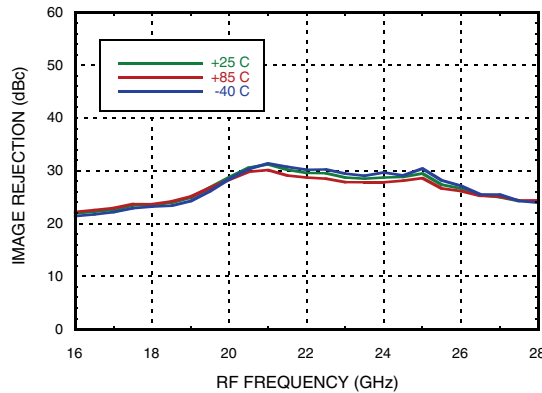


**Image Rejection, USB vs. LO Drive**

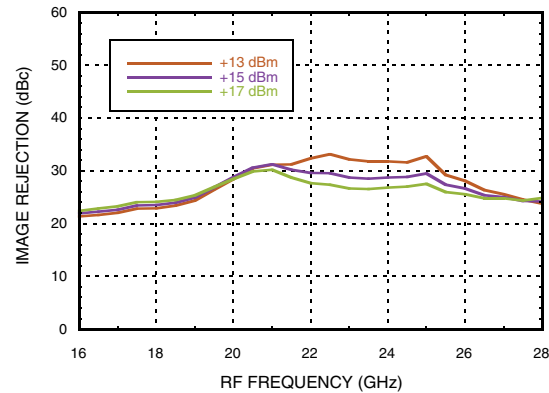

**Input P1dB, USB vs. Temperature**

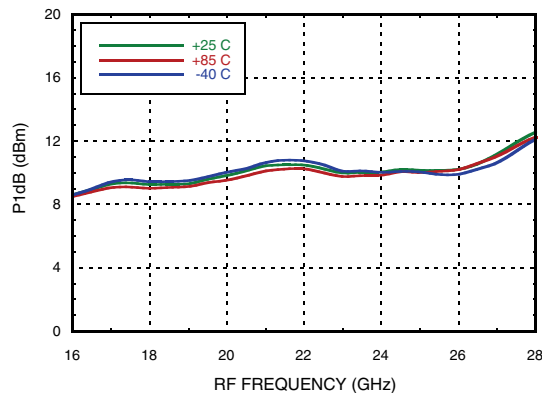


**Input IP3, USB vs. Temperature**

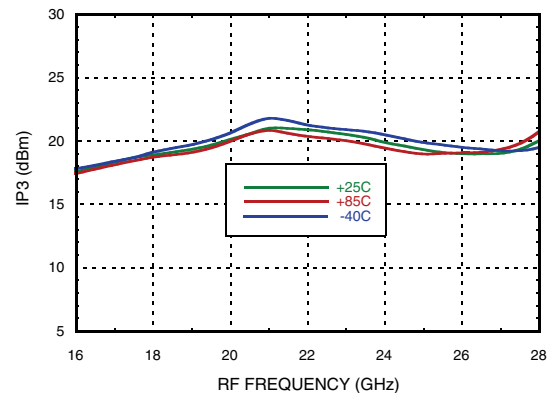


Data Taken As IRM with External IF 90° Hybrid, IF = 2500 MHz


**Input IP3, USB vs. Temperature**

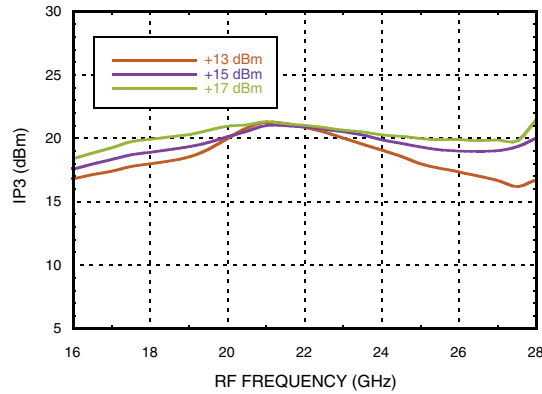


**Conversion Gain, LSB vs. Temperature**

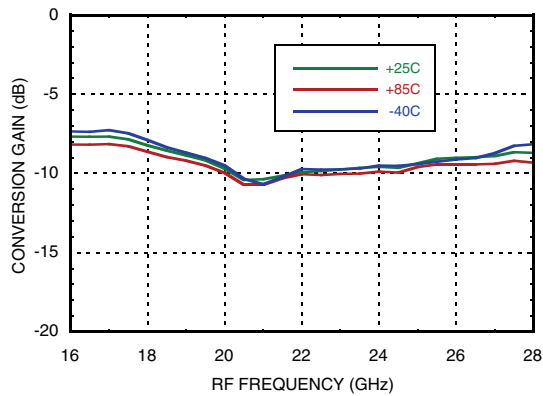


**Conversion Gain, LSB vs. LO Drive**

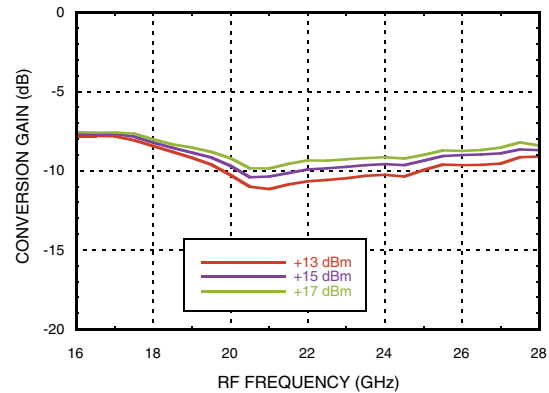

**Image Rejection, LSB vs. Temperature**

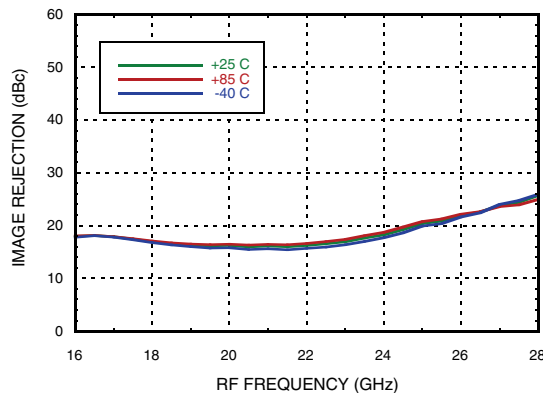


**Image Rejection, LSB vs. LO Drive**

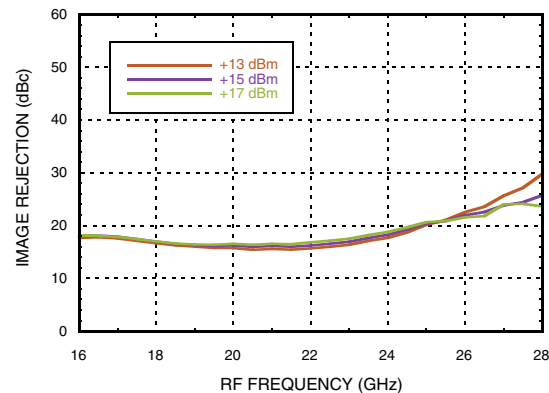




Data Taken As IRM with External IF 90° Hybrid, IF = 2500 MHz


**Input P1dB, LSB vs. Temperature**

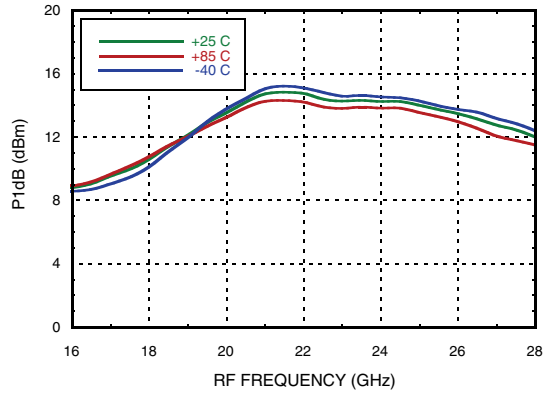

**Input IP3, LSB vs. Temperature**

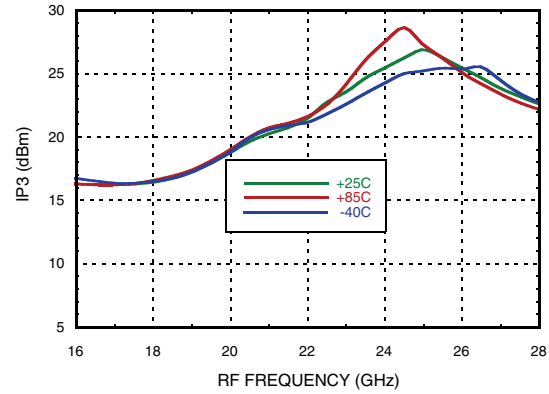

**Input IP3, LSB vs LO Drive**

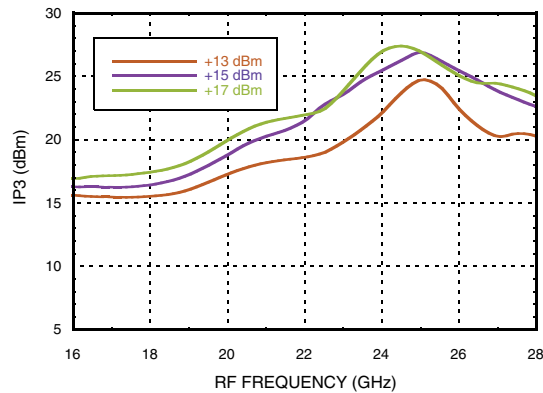


**Harmonics of LO**

LO Freq. (GHz)	nLO Spur at RF Port			
	1	2	3	4
13	43	40	46	X
18	41	50	X	X
23	44	43	X	X
28	44	X	X	X
33	36	X	X	X

LO = + 15 dBm  
Values in dBc below LO level measured at RF Port.

**MxN Spurious Outputs**

mRF	nLO				
	0	1	2	3	4
0	X	8	49	X	X
1	19	X	43	70	X
2	70	86	67	87	70
3	X	69	84	81	86
4	X	X	69	81	92

RF = 22 GHz @ -10 dBm  
LO = 21 GHz @ +15 dBm  
Data taken without IF hybrid  
All values in dBc below IF power level


**Absolute Maximum Ratings**

RF / IF Input (LO = +18 dBm)	+18 dBm
LO Drive	+20 dBm
Channel Temperature	150°C
Continuous Pdiss (T=85°C) (derate 5.2 mW/°C above 85°C)	338 mW
Thermal Resistance (R <sub>TH</sub> ) (junction to package bottom)	192°C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing

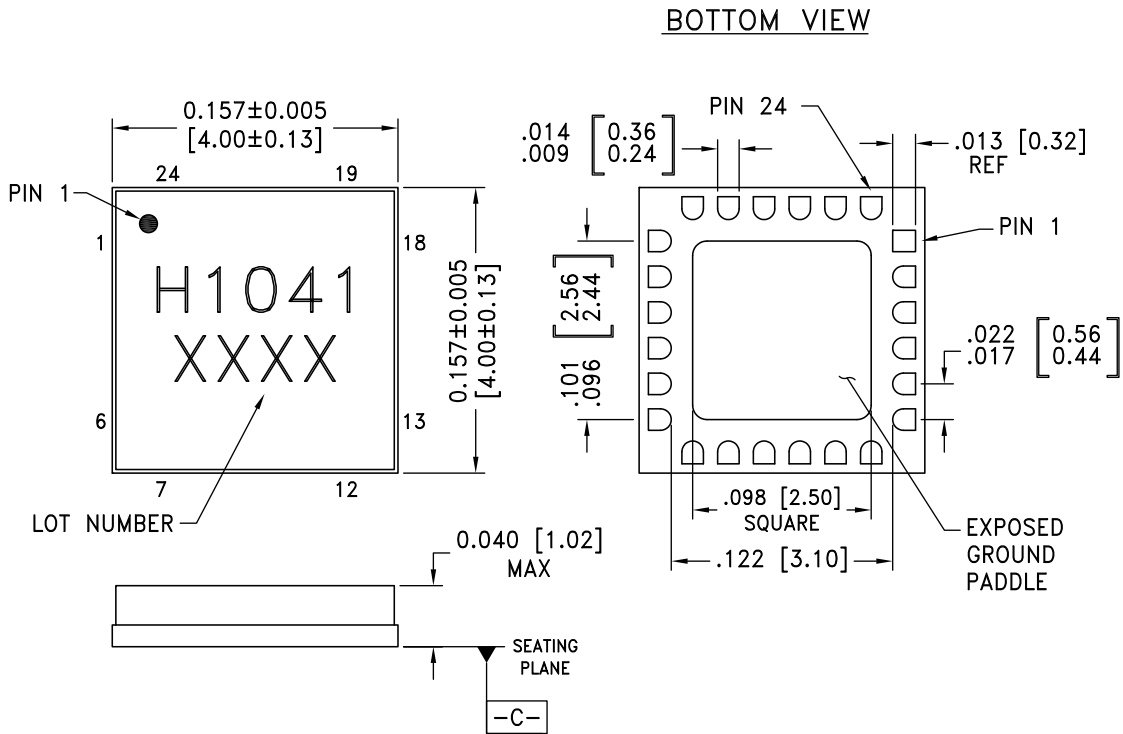

**NOTES:**

1. PACKAGE BODY MATERIAL: ALUMINA.
2. LEAD AND GROUND PADDLE PLATING: GOLD FLASH OVER NICKEL.
3. DIMENSIONS ARE IN INCHES (MILLIMETERS).
4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
5. PACKAGE WARP SHALL NOT EXCEED 0.05MM DATUM [-C-]
6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.





### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[2]</sup>
HMC1041LC4	Alumina, White	Gold over Nickel	MSL3 <sup>[1]</sup>	H1041 XXXX


[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX


**Pin Descriptions**

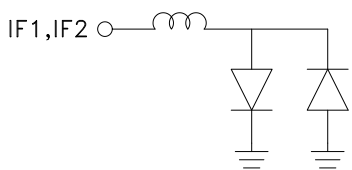Pin Number	Function	Description	Interface Schematic
1, 2, 6, 7, 10, 12, 13, 17- 24	N/C	These pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
3, 5, 8, 14, 16	GND	These pins and the exposed ground paddle must be connected to RF/DC ground.	
4	RF	This pin is AC coupled and matched to 50 Ohms.	
9	IF2	This pin is DC coupled. For application not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source/sink more than 3 mA of current or product non-function and possible product failure will result.	
11	IF1		
15	LO	This pin is AC coupled and matched to 50 Ohms from 17 to 27 GHz	

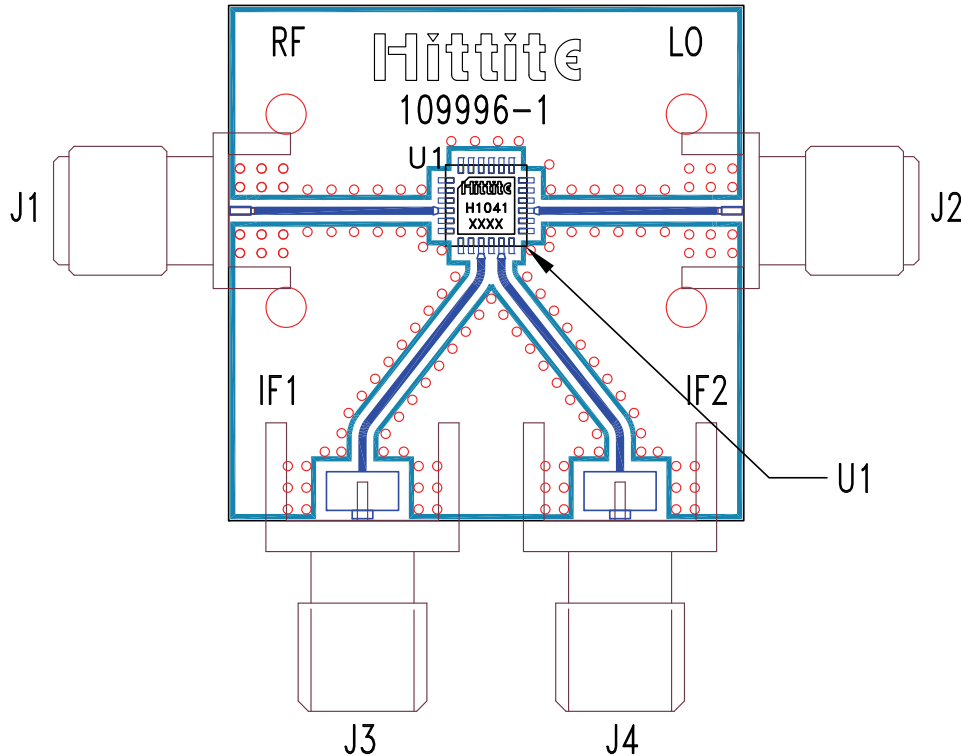

**Evaluation PCB**

**List of Materials for Evaluation PCB EVAL01-HMC1041LC4 [1]**

Item	Description
J1, J2	PCB Mount SMA RF Connector, SRI
J3 - J4	PCB Mount SMA Connector, Johnson
U1	HMC1041LC4
PCB [2]	109996-1 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



**Notes**

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9