


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B3	REVISED PER ECO-11-005027	12MAR2011	RK	HMR

1 MATERIAL:
CONTACT: BRASS
LATCH HOUSING, INSERT, COLLET, COLLET NUT:
UL 94V-0 RATED THERMOPLASTIC
COLOR:
COLLET AND INSERT: GRAY
LATCH HOUSING AND NUT: SEE TABLE


2 FINISH:
CONTACT, 0.75µm MIN. GOLD OVER NICKEL

3 SOLDER TERMINATION CONTACT, 28 AWG WIRE MAX.


4. PRODUCT IS SUPPLIED UNASSEMBLED.

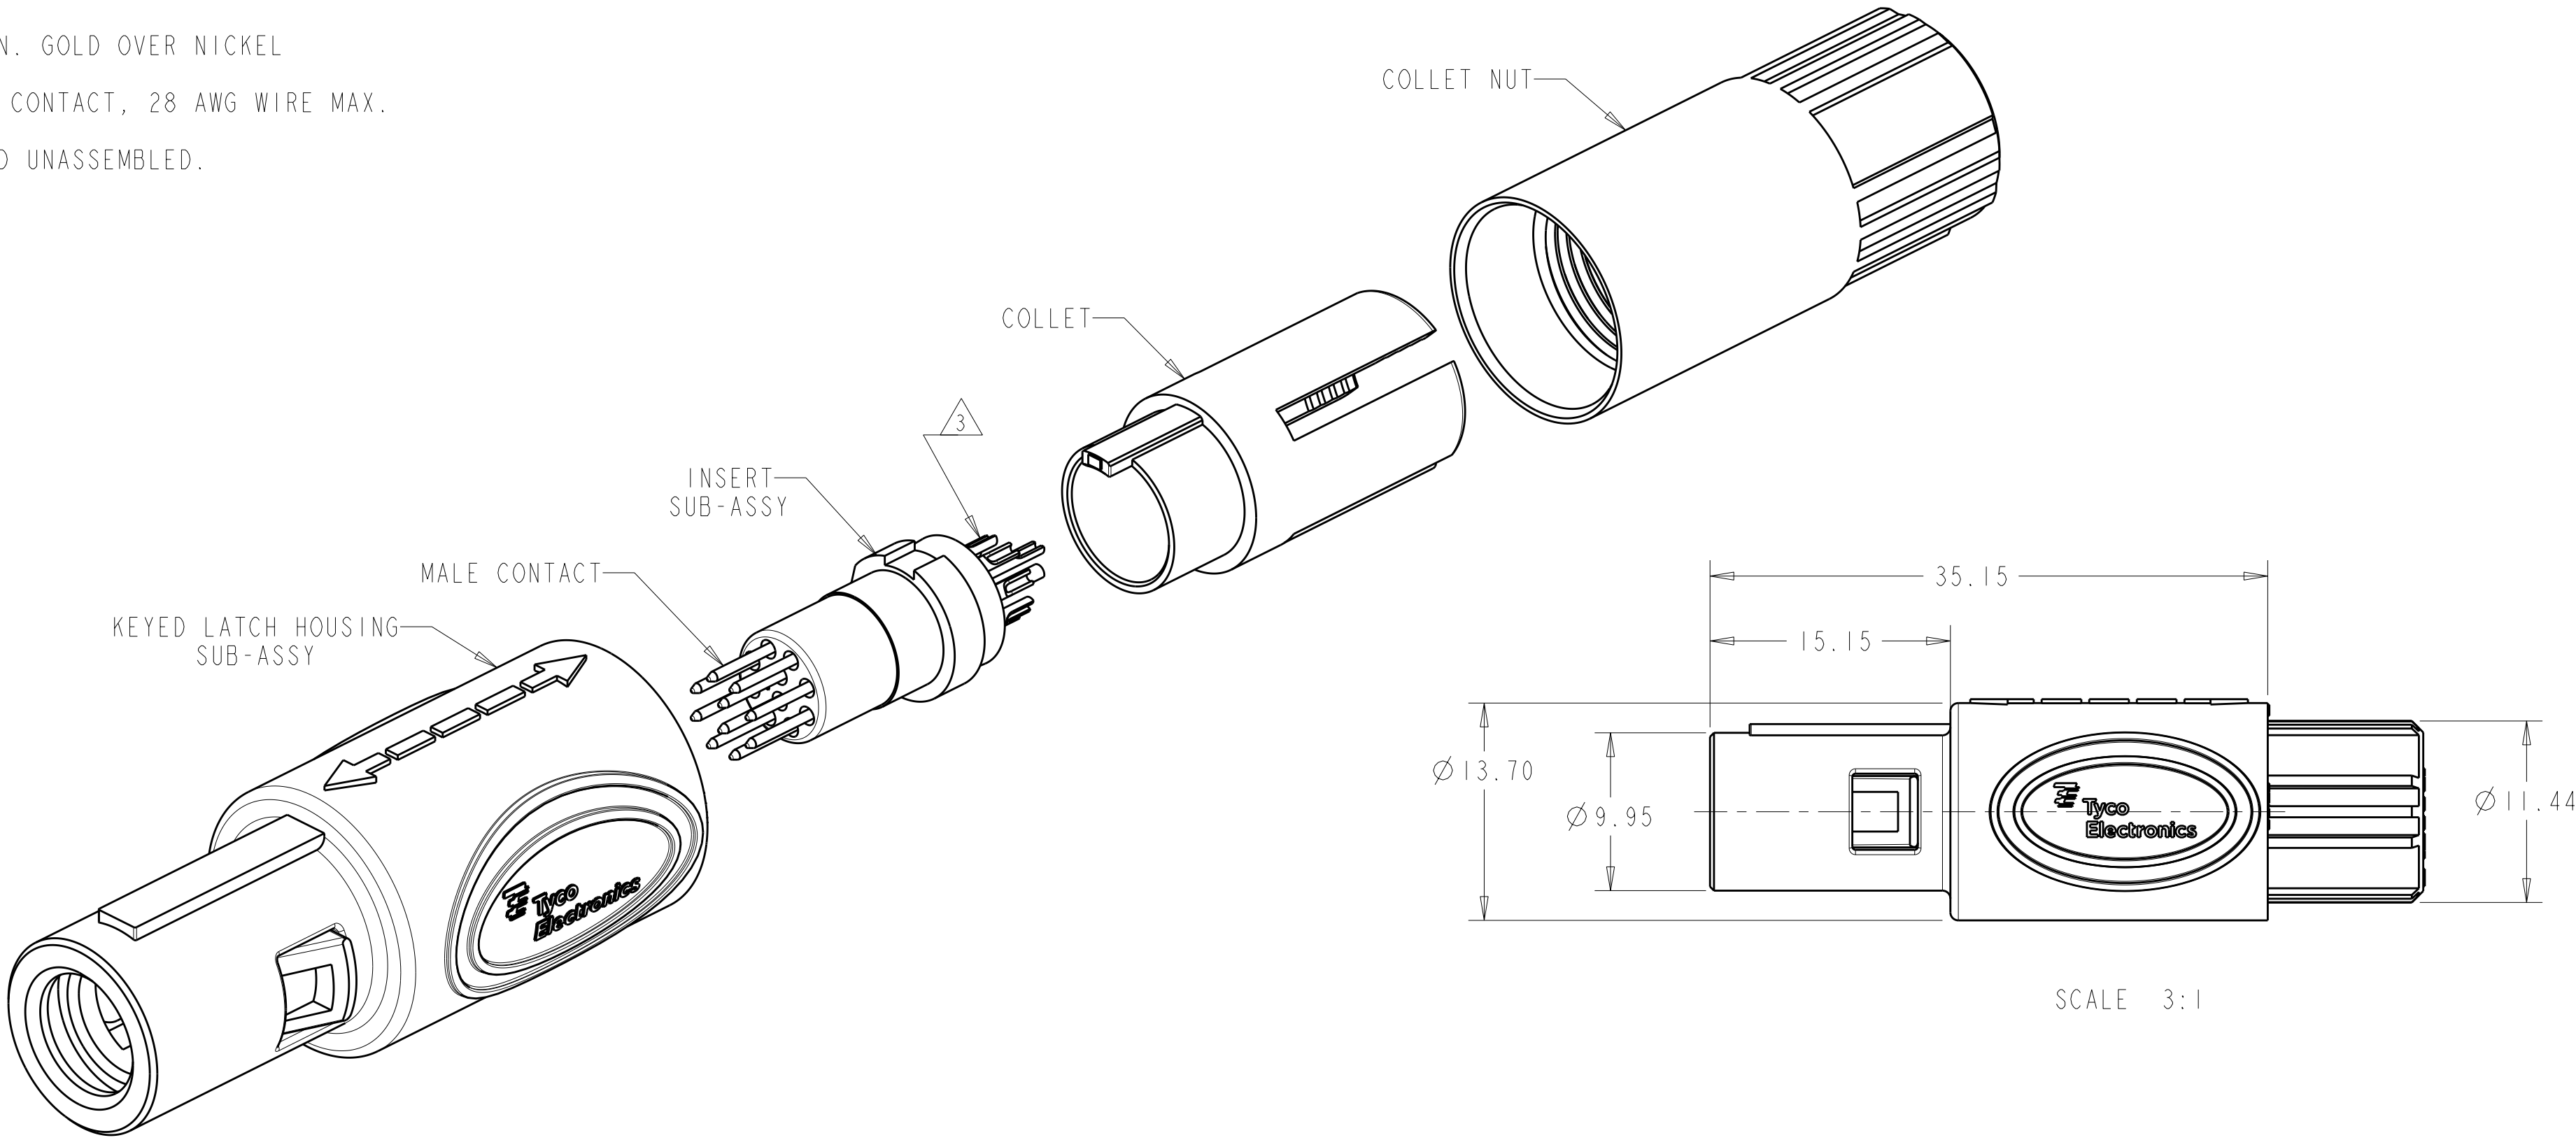


SCALE 3:1

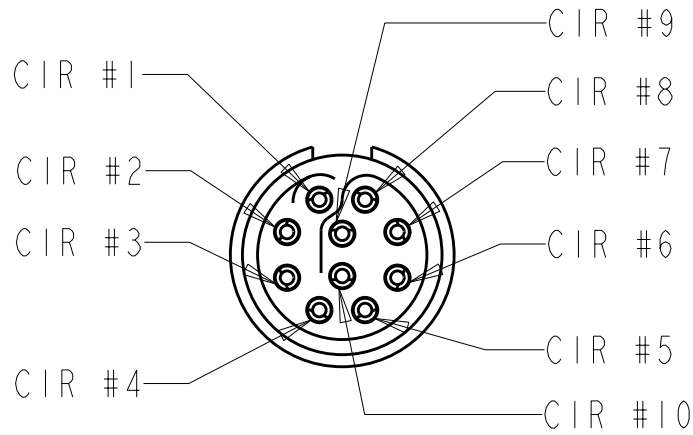

INSERT SUB-ASSY
CIRCUIT DESIGNATION VIEW

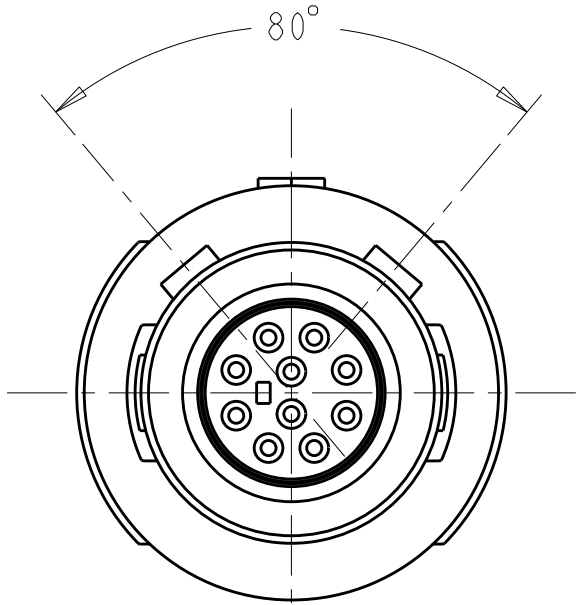

80° KEYING
SCALE 4:1

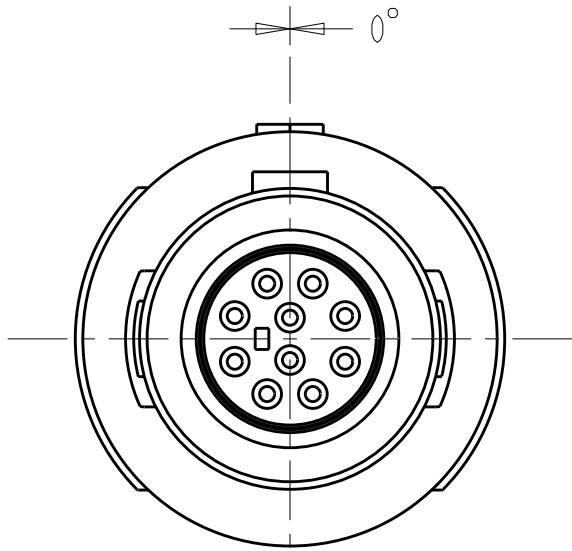

0° KEYING
SCALE 4:1

SEE SHEET 2 FOR
PART NUMBER SELECTION

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. MILLER CHK L. BREKOSKY APVD -		09MAR2006 09MAR2006		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± 1 PLC ±0.13 2 PLC ±0.08 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		10 POSITION, CABLE COLLET STRAIGHT PLUG ASSEMBLY 0 AND 80 DEGREE KEYING			
MATERIAL		PRODUCT SPEC 108-2249 APPLICATION SPEC 114-13184 WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C-1877848	RESTRICTED TO -
				CUSTOMER DRAWING			
				SCALE 4:1	SHEET 1	OF 3	REV B3

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.		

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
3-6			-	SEE SHEET 1	-	-	-

Ø 2.7-Ø 3.9	BLUE	GRAY	80°	7-1877848-2
Ø 4.0-Ø 5.2	BLUE	GRAY	80°	7-1877848-1
Ø 5.3-Ø 6.5	BLUE	GRAY	80°	7-1877848-0
Ø 2.7-Ø 3.9	BLUE	GRAY	0°	6-1877848-9
Ø 4.0-Ø 5.2	BLUE	GRAY	0°	6-1877848-8
Ø 5.3-Ø 6.5	BLUE	GRAY	0°	6-1877848-7
Ø 2.7-Ø 3.9	BLUE	BLACK	80°	6-1877848-6
Ø 4.0-Ø 5.2	BLUE	BLACK	80°	6-1877848-5
Ø 5.3-Ø 6.5	BLUE	BLACK	80°	6-1877848-4
Ø 2.7-Ø 3.9	BLUE	BLACK	0°	6-1877848-3
Ø 4.0-Ø 5.2	BLUE	BLACK	0°	6-1877848-2
Ø 5.3-Ø 6.5	BLUE	BLACK	0°	6-1877848-1
Ø 2.7-Ø 3.9	GREEN	GRAY	80°	6-1877848-0
Ø 4.0-Ø 5.2	GREEN	GRAY	80°	5-1877848-9
Ø 5.3-Ø 6.5	GREEN	GRAY	80°	5-1877848-8
Ø 2.7-Ø 3.9	GREEN	GRAY	0°	5-1877848-7
Ø 4.0-Ø 5.2	GREEN	GRAY	0°	5-1877848-6
Ø 5.3-Ø 6.5	GREEN	GRAY	0°	5-1877848-5
Ø 2.7-Ø 3.9	GREEN	BLACK	80°	5-1877848-4
Ø 4.0-Ø 5.2	GREEN	BLACK	80°	5-1877848-3
Ø 5.3-Ø 6.5	GREEN	BLACK	80°	5-1877848-2
Ø 2.7-Ø 3.9	GREEN	BLACK	0°	5-1877848-1
Ø 4.0-Ø 5.2	GREEN	BLACK	0°	5-1877848-0
Ø 5.3-Ø 6.5	GREEN	BLACK	0°	4-1877848-9
Ø 2.7-Ø 3.9	YELLOW	GRAY	80°	4-1877848-8
Ø 4.0-Ø 5.2	YELLOW	GRAY	80°	4-1877848-7
Ø 5.3-Ø 6.5	YELLOW	GRAY	80°	4-1877848-6
Ø 2.7-Ø 3.9	YELLOW	GRAY	0°	4-1877848-5
Ø 4.0-Ø 5.2	YELLOW	GRAY	0°	4-1877848-4
Ø 5.3-Ø 6.5	YELLOW	GRAY	0°	4-1877848-3
Ø 2.7-Ø 3.9	YELLOW	BLACK	80°	4-1877848-2
Ø 4.0-Ø 5.2	YELLOW	BLACK	80°	4-1877848-1
Ø 5.3-Ø 6.5	YELLOW	BLACK	80°	4-1877848-0
Ø 2.7-Ø 3.9	YELLOW	BLACK	0°	3-1877848-9
Ø 4.0-Ø 5.2	YELLOW	BLACK	0°	3-1877848-8
Ø 5.3-Ø 6.5	YELLOW	BLACK	0°	3-1877848-7
CABLE RANGE	COLLET NUT COLOR	LATCH HOUSING COLOR	KEYING	PART NO.
PART NUMBERS 37 THRU 72				

Ø 2.7-Ø 3.9	WHITE	GRAY	80°	3-1877848-6
Ø 4.0-Ø 5.2	WHITE	GRAY	80°	3-1877848-5
Ø 5.3-Ø 6.5	WHITE	GRAY	80°	3-1877848-4
Ø 2.7-Ø 3.9	WHITE	GRAY	0°	3-1877848-3
Ø 4.0-Ø 5.2	WHITE	GRAY	0°	3-1877848-2
Ø 5.3-Ø 6.5	WHITE	GRAY	0°	3-1877848-1
Ø 2.7-Ø 3.9	WHITE	BLACK	80°	3-1877848-0
Ø 4.0-Ø 5.2	WHITE	BLACK	80°	2-1877848-9
Ø 5.3-Ø 6.5	WHITE	BLACK	80°	2-1877848-8
Ø 2.7-Ø 3.9	WHITE	BLACK	0°	2-1877848-7
Ø 4.0-Ø 5.2	WHITE	BLACK	0°	2-1877848-6
Ø 5.3-Ø 6.5	WHITE	BLACK	0°	2-1877848-5
Ø 2.7-Ø 3.9	RED	GRAY	80°	2-1877848-4
Ø 4.0-Ø 5.2	RED	GRAY	80°	2-1877848-3
Ø 5.3-Ø 6.5	RED	GRAY	80°	2-1877848-2
Ø 2.7-Ø 3.9	RED	GRAY	0°	2-1877848-1
Ø 4.0-Ø 5.2	RED	GRAY	0°	2-1877848-0
Ø 5.3-Ø 6.5	RED	GRAY	0°	1-1877848-9
Ø 2.7-Ø 3.9	RED	BLACK	80°	1-1877848-8
Ø 4.0-Ø 5.2	RED	BLACK	80°	1-1877848-7
Ø 5.3-Ø 6.5	RED	BLACK	80°	1-1877848-6
Ø 2.7-Ø 3.9	RED	BLACK	0°	1-1877848-5
Ø 4.0-Ø 5.2	RED	BLACK	0°	1-1877848-4
Ø 5.3-Ø 6.5	RED	BLACK	0°	1-1877848-3
Ø 2.7-Ø 3.9	GRAY	GRAY	80°	1-1877848-2
Ø 4.0-Ø 5.2	GRAY	GRAY	80°	1-1877848-1
Ø 5.3-Ø 6.5	GRAY	GRAY	80°	1-1877848-0
Ø 2.7-Ø 3.9	GRAY	GRAY	0°	1877848-9
Ø 4.0-Ø 5.2	GRAY	GRAY	0°	1877848-8
Ø 5.3-Ø 6.5	GRAY	GRAY	0°	1877848-7
Ø 2.7-Ø 3.9	BLACK	BLACK	80°	1877848-6
Ø 4.0-Ø 5.2	BLACK	BLACK	80°	1877848-5
Ø 5.3-Ø 6.5	BLACK	BLACK	80°	1877848-4
Ø 2.7-Ø 3.9	BLACK	BLACK	0°	1877848-3
Ø 4.0-Ø 5.2	BLACK	BLACK	0°	1877848-2
Ø 5.3-Ø 6.5	BLACK	BLACK	0°	1877848-1
CABLE RANGE	COLLET NUT COLOR	LATCH HOUSING COLOR	KEYING	PART NO.
PART NUMBERS I THRU 36				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09MAR2006 K. MILLER CHK 09MAR2006 L. BREKOSKY		 TE Connectivity							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 10 POSITION, CABLE COLLET STRAIGHT PLUG ASSEMBLY 0 AND 80 DEGREE KEYING							
		APVD -						SIZECAGE CODEDRAWING NORESTRICTED TO A200779C-1877848-			
		PRODUCT SPEC 108-2249 APPLICATION SPEC 114-13184									
MATERIAL -		FINISH -		WEIGHT -							
CUSTOMER DRAWING				SCALE 4:1		SHEET 2 of 3					
						REV B3					

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09MAR2006 K. MILLER CHK 09MAR2006 L. BREKOSKY		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 10 POSITION, CABLE COLLET STRAIGHT PLUG ASSEMBLY 0 AND 80 DEGREE KEYING	
		APVD - PRODUCT SPEC 108-2249			
0 PLC ±. 1 PLC ±0.13 2 PLC ±0.08 3 PLC ±. 4 PLC ±. ANGLES ±1°		APPLICATION SPEC 114-13184			
MATERIAL -		FINISH -		SIZE A2	CAGE CODE 00779
		WEIGHT -		DRAWING NO C-1877848	
CUSTOMER DRAWING				SCALE 4:1	SHEET 3 OF 3
				REV B3	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9