

KMR Series (160~450WV)

- Downsized 5mm in height from current snap-ins KMQ series
- Max. 50% up ripple current than same case size of KMQ series
- Endurance : 105°C 2,000hrs with ripple current
- Rated voltage range : 160 to 450V_{dc}, Capacitance range : 100 to 3900μF
- For inverter control, switching power supply
- Non solvent-proof type
- RoHS Compliant




◆ SPECIFICATIONS


Items	Characteristics			
Category	-25 to +105°C			
Temperature Range				
Rated Voltage Range	160 to 450V _{dc}			
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)			
Leakage Current	$I \leq 3\sqrt{CV}$ Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)			
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2000 hours at 105°C.			
	Capacitance change	≤±20% of the initial value		
	D.F. (tanδ)	≤200% of the initial specified value		
	Leakage current	≤The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.			
	Capacitance change	≤±15% of the initial value		
	D.F. (tanδ)	≤150% of the initial specified value		
	Leakage current	≤The initial specified value		

◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

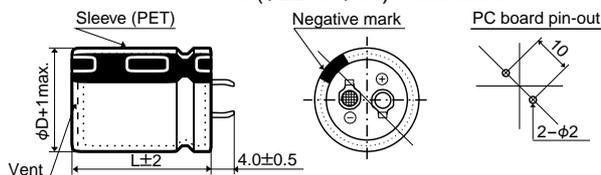


● Terminal Code : LI (φ35)

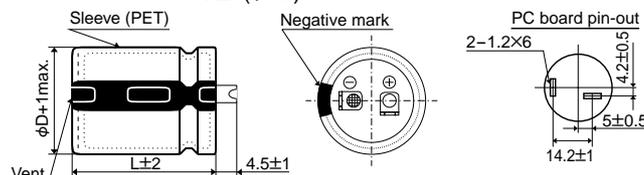

No plastic disk is the standard design.

◆ PART NUMBERING SYSTEM

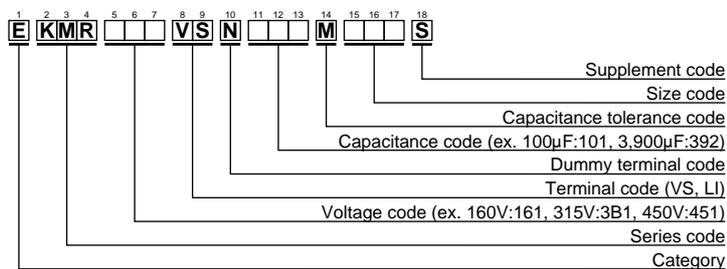

Specifications in this bulletin are subject to change without notice.

KMRSeries (160~450WV)

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.	
160	560	22×25	1.58	EKMR161VSN561MP25S	200	1,800	35×35	2.53	EKMR201VSN182MA35S	
	680	22×30	1.83	EKMR161VSN681MP30S		2,200	30×50	3.31	EKMR201VSN222MR50S	
	820	22×35	2.06	EKMR161VSN821MP35S		2,200	35×40	2.92	EKMR201VSN222MA40S	
	820	25.4×25	1.89	EKMR161VSN821MQ25S		2,700	35×45	3.33	EKMR201VSN272MA45S	
	1,000	22×40	2.33	EKMR161VSN102MP40S		2,700	35×50	3.43	EKMR201VSN272MA50S	
	1,000	25.4×30	2.15	EKMR161VSN102MQ30S		250	330	22×25	1.21	EKMR251VSN331MP25S
	1,000	30×25	1.90	EKMR161VSN102MR25S			390	22×30	1.38	EKMR251VSN391MP30S
	1,200	22×45	2.61	EKMR161VSN122MP45S			470	22×35	1.56	EKMR251VSN471MP35S
	1,200	22×50	2.69	EKMR161VSN122MP50S			470	25.4×25	1.43	EKMR251VSN471MQ25S
	1,200	25.4×35	2.45	EKMR161VSN122MQ35S			560	22×40	1.74	EKMR251VSN561MP40S
	1,500	25.4×40	2.82	EKMR161VSN152MQ40S			560	25.4×30	1.61	EKMR251VSN561MQ30S
	1,500	25.4×45	2.88	EKMR161VSN152MQ45S			560	30×25	1.42	EKMR251VSN561MR25S
	1,500	30×30	2.39	EKMR161VSN152MR30S			680	22×45	1.97	EKMR251VSN681MP45S
	1,500	35×25	2.17	EKMR161VSN152MA25S			680	25.4×35	1.85	EKMR251VSN681MQ35S
	1,800	25.4×50	3.22	EKMR161VSN182MQ50S			820	22×50	2.22	EKMR251VSN821MP50S
	1,800	30×35	2.73	EKMR161VSN182MR35S		820	25.4×40	2.08	EKMR251VSN821MQ40S	
	1,800	30×40	2.82	EKMR161VSN182MR40S		820	25.4×45	2.13	EKMR251VSN821MQ45S	
	1,800	35×30	2.47	EKMR161VSN182MA30S		820	30×30	1.77	EKMR251VSN821MR30S	
	2,200	30×45	3.23	EKMR161VSN222MR45S		820	35×25	1.60	EKMR251VSN821MA25S	
	2,200	35×35	2.79	EKMR161VSN222MA35S		1,000	25.4×50	2.40	EKMR251VSN102MQ50S	
2,700	30×50	3.66	EKMR161VSN272MR50S	1,000	30×35	2.03	EKMR251VSN102MR35S			
2,700	35×40	3.23	EKMR161VSN272MA40S	1,200	30×40	2.31	EKMR251VSN122MR40S			
3,300	35×45	3.68	EKMR161VSN332MA45S	1,200	30×45	2.38	EKMR251VSN122MR45S			
3,900	35×50	4.12	EKMR161VSN392MA50S	1,200	35×30	2.02	EKMR251VSN122MA30S			
180	470	22×25	1.45	EKMR181VSN471MP25S	1,200	35×35	2.06	EKMR251VSN122MA35S		
	560	22×30	1.66	EKMR181VSN561MP30S	1,500	30×50	2.73	EKMR251VSN152MR50S		
	680	22×35	1.87	EKMR181VSN681MP35S	1,500	35×40	2.41	EKMR251VSN152MA40S		
	680	25.4×25	1.72	EKMR181VSN681MQ25S	1,800	35×45	2.72	EKMR251VSN182MA45S		
	820	22×40	2.11	EKMR181VSN821MP40S	2,200	35×50	3.10	EKMR251VSN222MA50S		
	820	25.4×30	1.94	EKMR181VSN821MQ30S	315	180	22×25	0.91	EKMR3B1VSN181MP25S	
	1,000	22×45	2.38	EKMR181VSN102MP45S		220	22×30	1.06	EKMR3B1VSN221MP30S	
	1,000	25.4×35	2.24	EKMR181VSN102MQ35S		270	22×35	1.20	EKMR3B1VSN271MP35S	
	1,000	30×25	1.90	EKMR181VSN102MR25S		270	25.4×25	1.15	EKMR3B1VSN271MQ25S	
	1,200	22×50	2.69	EKMR181VSN122MP50S		330	22×40	1.37	EKMR3B1VSN331MP40S	
	1,200	25.4×40	2.52	EKMR181VSN122MQ40S		330	25.4×30	1.30	EKMR3B1VSN331MQ30S	
	1,200	30×30	2.14	EKMR181VSN122MR30S		390	22×45	1.52	EKMR3B1VSN391MP45S	
	1,200	35×25	1.94	EKMR181VSN122MA25S		390	25.4×35	1.48	EKMR3B1VSN391MQ35S	
	1,500	25.4×45	2.88	EKMR181VSN152MQ45S		390	30×25	1.39	EKMR3B1VSN391MR25S	
	1,500	25.4×50	2.94	EKMR181VSN152MQ50S		470	22×50	1.72	EKMR3B1VSN471MP50S	
	1,500	30×35	2.49	EKMR181VSN152MR35S	470	25.4×40	1.67	EKMR3B1VSN471MQ40S		
	1,800	30×40	2.82	EKMR181VSN182MR40S	470	30×30	1.57	EKMR3B1VSN471MR30S		
	1,800	35×30	2.47	EKMR181VSN182MA30S	470	35×25	1.52	EKMR3B1VSN471MA25S		
	2,200	30×45	3.23	EKMR181VSN222MR45S	560	25.4×45	1.86	EKMR3B1VSN561MQ45S		
	2,200	30×50	3.31	EKMR181VSN222MR50S	560	30×35	1.78	EKMR3B1VSN561MR35S		
2,200	35×35	2.79	EKMR181VSN222MA35S	680	25.4×50	2.10	EKMR3B1VSN681MQ50S			
2,200	35×40	2.92	EKMR181VSN222MA40S	680	30×40	2.03	EKMR3B1VSN681MR40S			
2,700	35×45	3.33	EKMR181VSN272MA45S	680	35×30	1.90	EKMR3B1VSN681MA30S			
3,300	35×50	3.79	EKMR181VSN332MA50S	820	30×45	2.31	EKMR3B1VSN821MR45S			
200	470	22×25	1.45	EKMR201VSN471MP25S	820	35×35	2.13	EKMR3B1VSN821MA35S		
	560	22×30	1.66	EKMR201VSN561MP30S	1,000	30×50	2.61	EKMR3B1VSN102MR50S		
	560	25.4×25	1.56	EKMR201VSN561MQ25S	1,000	35×40	2.46	EKMR3B1VSN102MA40S		
	680	22×35	1.87	EKMR201VSN681MP35S	1,200	35×45	2.78	EKMR3B1VSN122MA45S		
	680	25.4×30	1.77	EKMR201VSN681MQ30S	1,200	35×50	2.86	EKMR3B1VSN122MA50S		
	820	22×40	2.11	EKMR201VSN821MP40S	350	150	22×25	0.84	EKMR351VSN151MP25S	
	820	25.4×35	2.03	EKMR201VSN821MQ35S		220	22×30	1.06	EKMR351VSN221MP30S	
	820	30×25	1.72	EKMR201VSN821MR25S		220	25.4×25	1.04	EKMR351VSN221MQ25S	
	1,000	22×45	2.38	EKMR201VSN102MP45S		270	22×35	1.20	EKMR351VSN271MP35S	
	1,000	22×50	2.45	EKMR201VSN102MP50S		270	25.4×30	1.18	EKMR351VSN271MQ30S	
	1,000	25.4×40	2.30	EKMR201VSN102MQ40S		330	22×40	1.37	EKMR351VSN331MP40S	
	1,000	30×30	1.95	EKMR201VSN102MR30S		330	22×45	1.40	EKMR351VSN331MQ45S	
	1,200	25.4×45	2.58	EKMR201VSN122MQ45S		330	25.4×35	1.36	EKMR351VSN331MQ35S	
	1,200	30×35	2.23	EKMR201VSN122MR35S		330	30×25	1.28	EKMR351VSN331MR25S	
	1,200	35×25	1.94	EKMR201VSN122MA25S		390	22×50	1.56	EKMR351VSN391MP50S	
	1,500	25.4×50	2.94	EKMR201VSN152MQ50S	390	25.4×40	1.52	EKMR351VSN391MQ40S		
	1,500	30×40	2.58	EKMR201VSN152MR40S	390	30×30	1.43	EKMR351VSN391MR30S		
	1,500	35×30	2.25	EKMR201VSN152MA30S	390	35×25	1.38	EKMR351VSN391MA25S		
	1,800	30×45	2.92	EKMR201VSN182MR45S	470	25.4×45	1.71	EKMR351VSN471MQ45S		

Specifications in this bulletin are subject to change without notice.

KMRSeries (160~450WV)

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.
350	560	25.4×50	1.90	EKMR351VSN561MQ50S	420	220	25.4×35	1.16	EKMR421VSN221MQ35S
	560	30×35	1.78	EKMR351VSN561MR35S		220	30×25	1.11	EKMR421VSN221MR25S
	560	30×40	1.84	EKMR351VSN561MR40S		270	22×50	1.36	EKMR421VSN271MP50S
	560	35×30	1.72	EKMR351VSN561MA30S		270	25.4×40	1.32	EKMR421VSN271MQ40S
	680	30×45	2.10	EKMR351VSN681MR45S		270	30×30	1.26	EKMR421VSN271MR30S
	680	35×35	1.94	EKMR351VSN681MA35S		270	35×25	1.26	EKMR421VSN271MA25S
	820	30×50	2.36	EKMR351VSN821MP50S		330	25.4×45	1.49	EKMR421VSN331MQ45S
	820	35×40	2.23	EKMR351VSN821MA40S		330	30×35	1.45	EKMR421VSN331MR35S
	1,000	35×45	2.54	EKMR351VSN102MA45S		390	25.4×50	1.66	EKMR421VSN391MQ50S
	1,200	35×50	2.86	EKMR351VSN122MA50S		390	30×40	1.63	EKMR421VSN391MR40S
400	120	22×25	0.75	EKMR401VSN121MP25S	390	35×30	1.58	EKMR421VSN391MA30S	
	180	22×30	0.96	EKMR401VSN181MP30S	470	30×45	1.85	EKMR421VSN471MR45S	
	180	25.4×25	0.94	EKMR401VSN181MQ25S	470	35×35	1.77	EKMR421VSN471MA35S	
	220	22×35	1.09	EKMR401VSN221MP35S	560	30×50	2.07	EKMR421VSN561MR50S	
	220	25.4×30	1.07	EKMR401VSN221MQ30S	560	35×40	2.02	EKMR421VSN561MA40S	
	270	22×40	1.24	EKMR401VSN271MP40S	680	35×45	2.29	EKMR421VSN681MA45S	
	270	22×45	1.26	EKMR401VSN271MP45S	820	35×50	2.59	EKMR421VSN821MA50S	
	270	25.4×35	1.23	EKMR401VSN271MQ35S	450	100	22×25	0.71	EKMR451VSN101MP25S
	270	30×25	1.16	EKMR401VSN271MR25S		120	22×30	0.82	EKMR451VSN121MP30S
	330	22×50	1.44	EKMR401VSN331MP50S		150	22×35	0.94	EKMR451VSN151MP35S
	330	25.4×40	1.40	EKMR401VSN331MQ40S		150	25.4×25	0.89	EKMR451VSN151MQ25S
	330	30×30	1.31	EKMR401VSN331MR30S		180	22×40	1.05	EKMR451VSN181MP40S
	330	35×25	1.27	EKMR401VSN331MA25S		180	25.4×30	1.00	EKMR451VSN181MQ30S
	390	25.4×45	1.55	EKMR401VSN391MQ45S		220	22×45	1.19	EKMR451VSN221MP45S
	390	30×35	1.49	EKMR401VSN391MR35S		220	25.4×35	1.16	EKMR451VSN221MQ35S
	470	25.4×50	1.74	EKMR401VSN471MQ50S		220	30×25	1.11	EKMR451VSN221MR25S
	470	30×40	1.69	EKMR401VSN471MR40S		270	22×50	1.36	EKMR451VSN271MP50S
	470	35×30	1.58	EKMR401VSN471MA30S		270	25.4×40	1.32	EKMR451VSN271MQ40S
	560	30×45	1.91	EKMR401VSN561MR45S		270	25.4×45	1.35	EKMR451VSN271MQ45S
	560	35×35	1.76	EKMR401VSN561MA35S		270	30×30	1.26	EKMR451VSN271MR30S
680	30×50	2.15	EKMR401VSN681MR50S	270		35×25	1.26	EKMR451VSN271MA25S	
680	35×40	2.03	EKMR401VSN681MA40S	330		25.4×50	1.52	EKMR451VSN331MQ50S	
820	35×45	2.30	EKMR401VSN821MA45S	330		30×35	1.45	EKMR451VSN331MR35S	
820	35×50	2.37	EKMR401VSN821MA50S	330		35×30	1.45	EKMR451VSN331MA30S	
420	120	22×25	0.78	EKMR421VSN121MP25S		390	30×40	1.63	EKMR451VSN391MR40S
	150	22×30	0.91	EKMR421VSN151MP30S		470	30×45	1.85	EKMR451VSN471MR45S
	150	25.4×25	0.89	EKMR421VSN151MQ25S		470	30×50	1.90	EKMR451VSN471MR50S
	180	22×35	1.03	EKMR421VSN181MP35S	470	35×35	1.77	EKMR451VSN471MA35S	
	180	25.4×30	1.00	EKMR421VSN181MQ30S	560	35×40	2.02	EKMR451VSN561MA40S	
	220	22×40	1.16	EKMR421VSN221MP40S	560	35×45	2.08	EKMR451VSN561MA45S	
	220	22×45	1.19	EKMR421VSN221MP45S	680	35×50	2.36	EKMR451VSN681MA50S	

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The ripple current gives aluminum electrolytic capacitors higher internal heat, the increased temperature accelerate the deterioration of the capacitors.

The lifetime is approximately halved with every 5°C rise.

Specifications in this bulletin are subject to change without notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9