
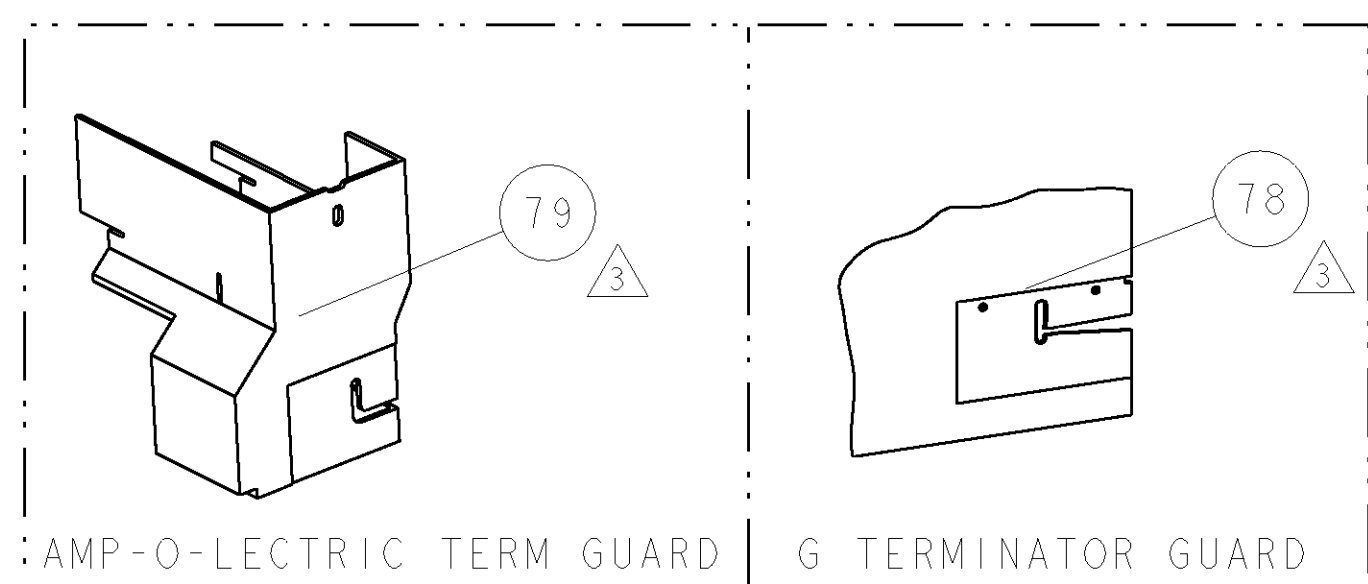
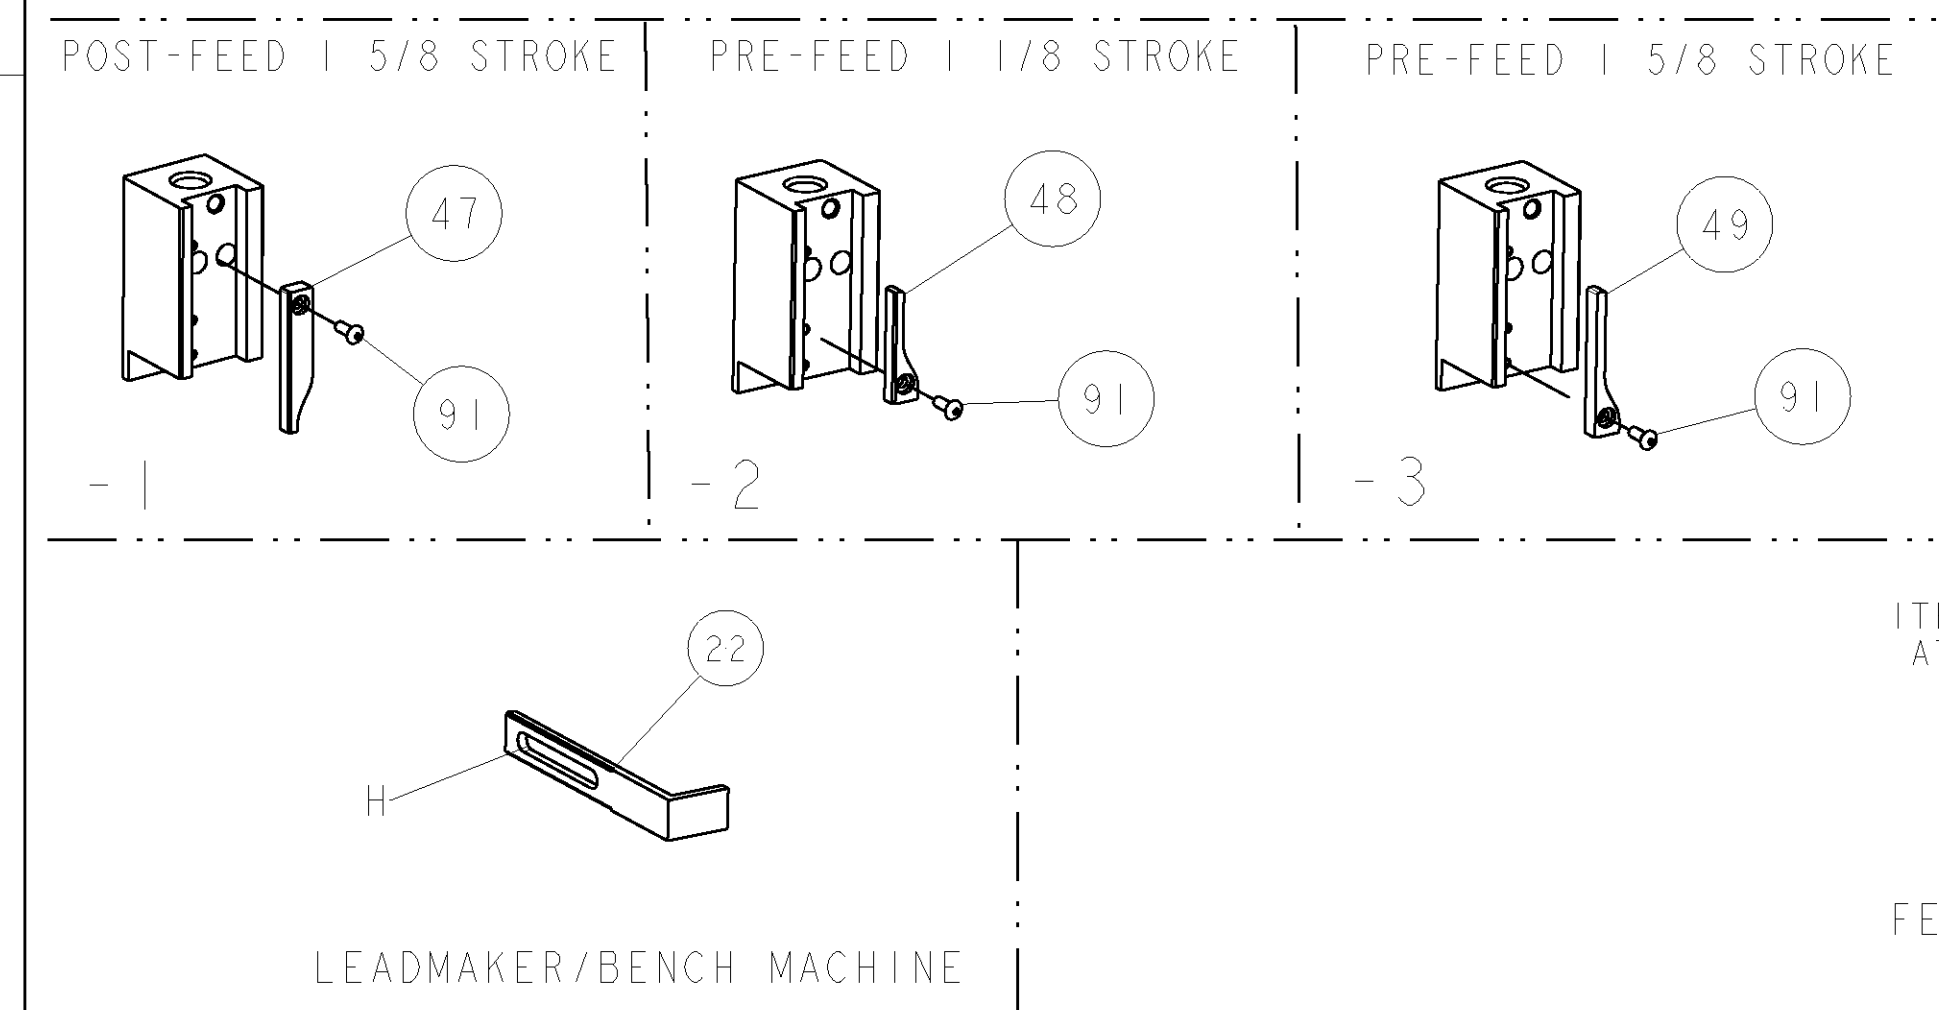


8			7		
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION		
20			20		
(C) COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		
PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	
1385878-1	A	122500-1	LEADMAKER	POST FEED	
1385878-2	A	565435-5	BENCH MODEL K	PRE FEED	
1385878-3	A	354500-1	BENCH MODEL G	PRE FEED	

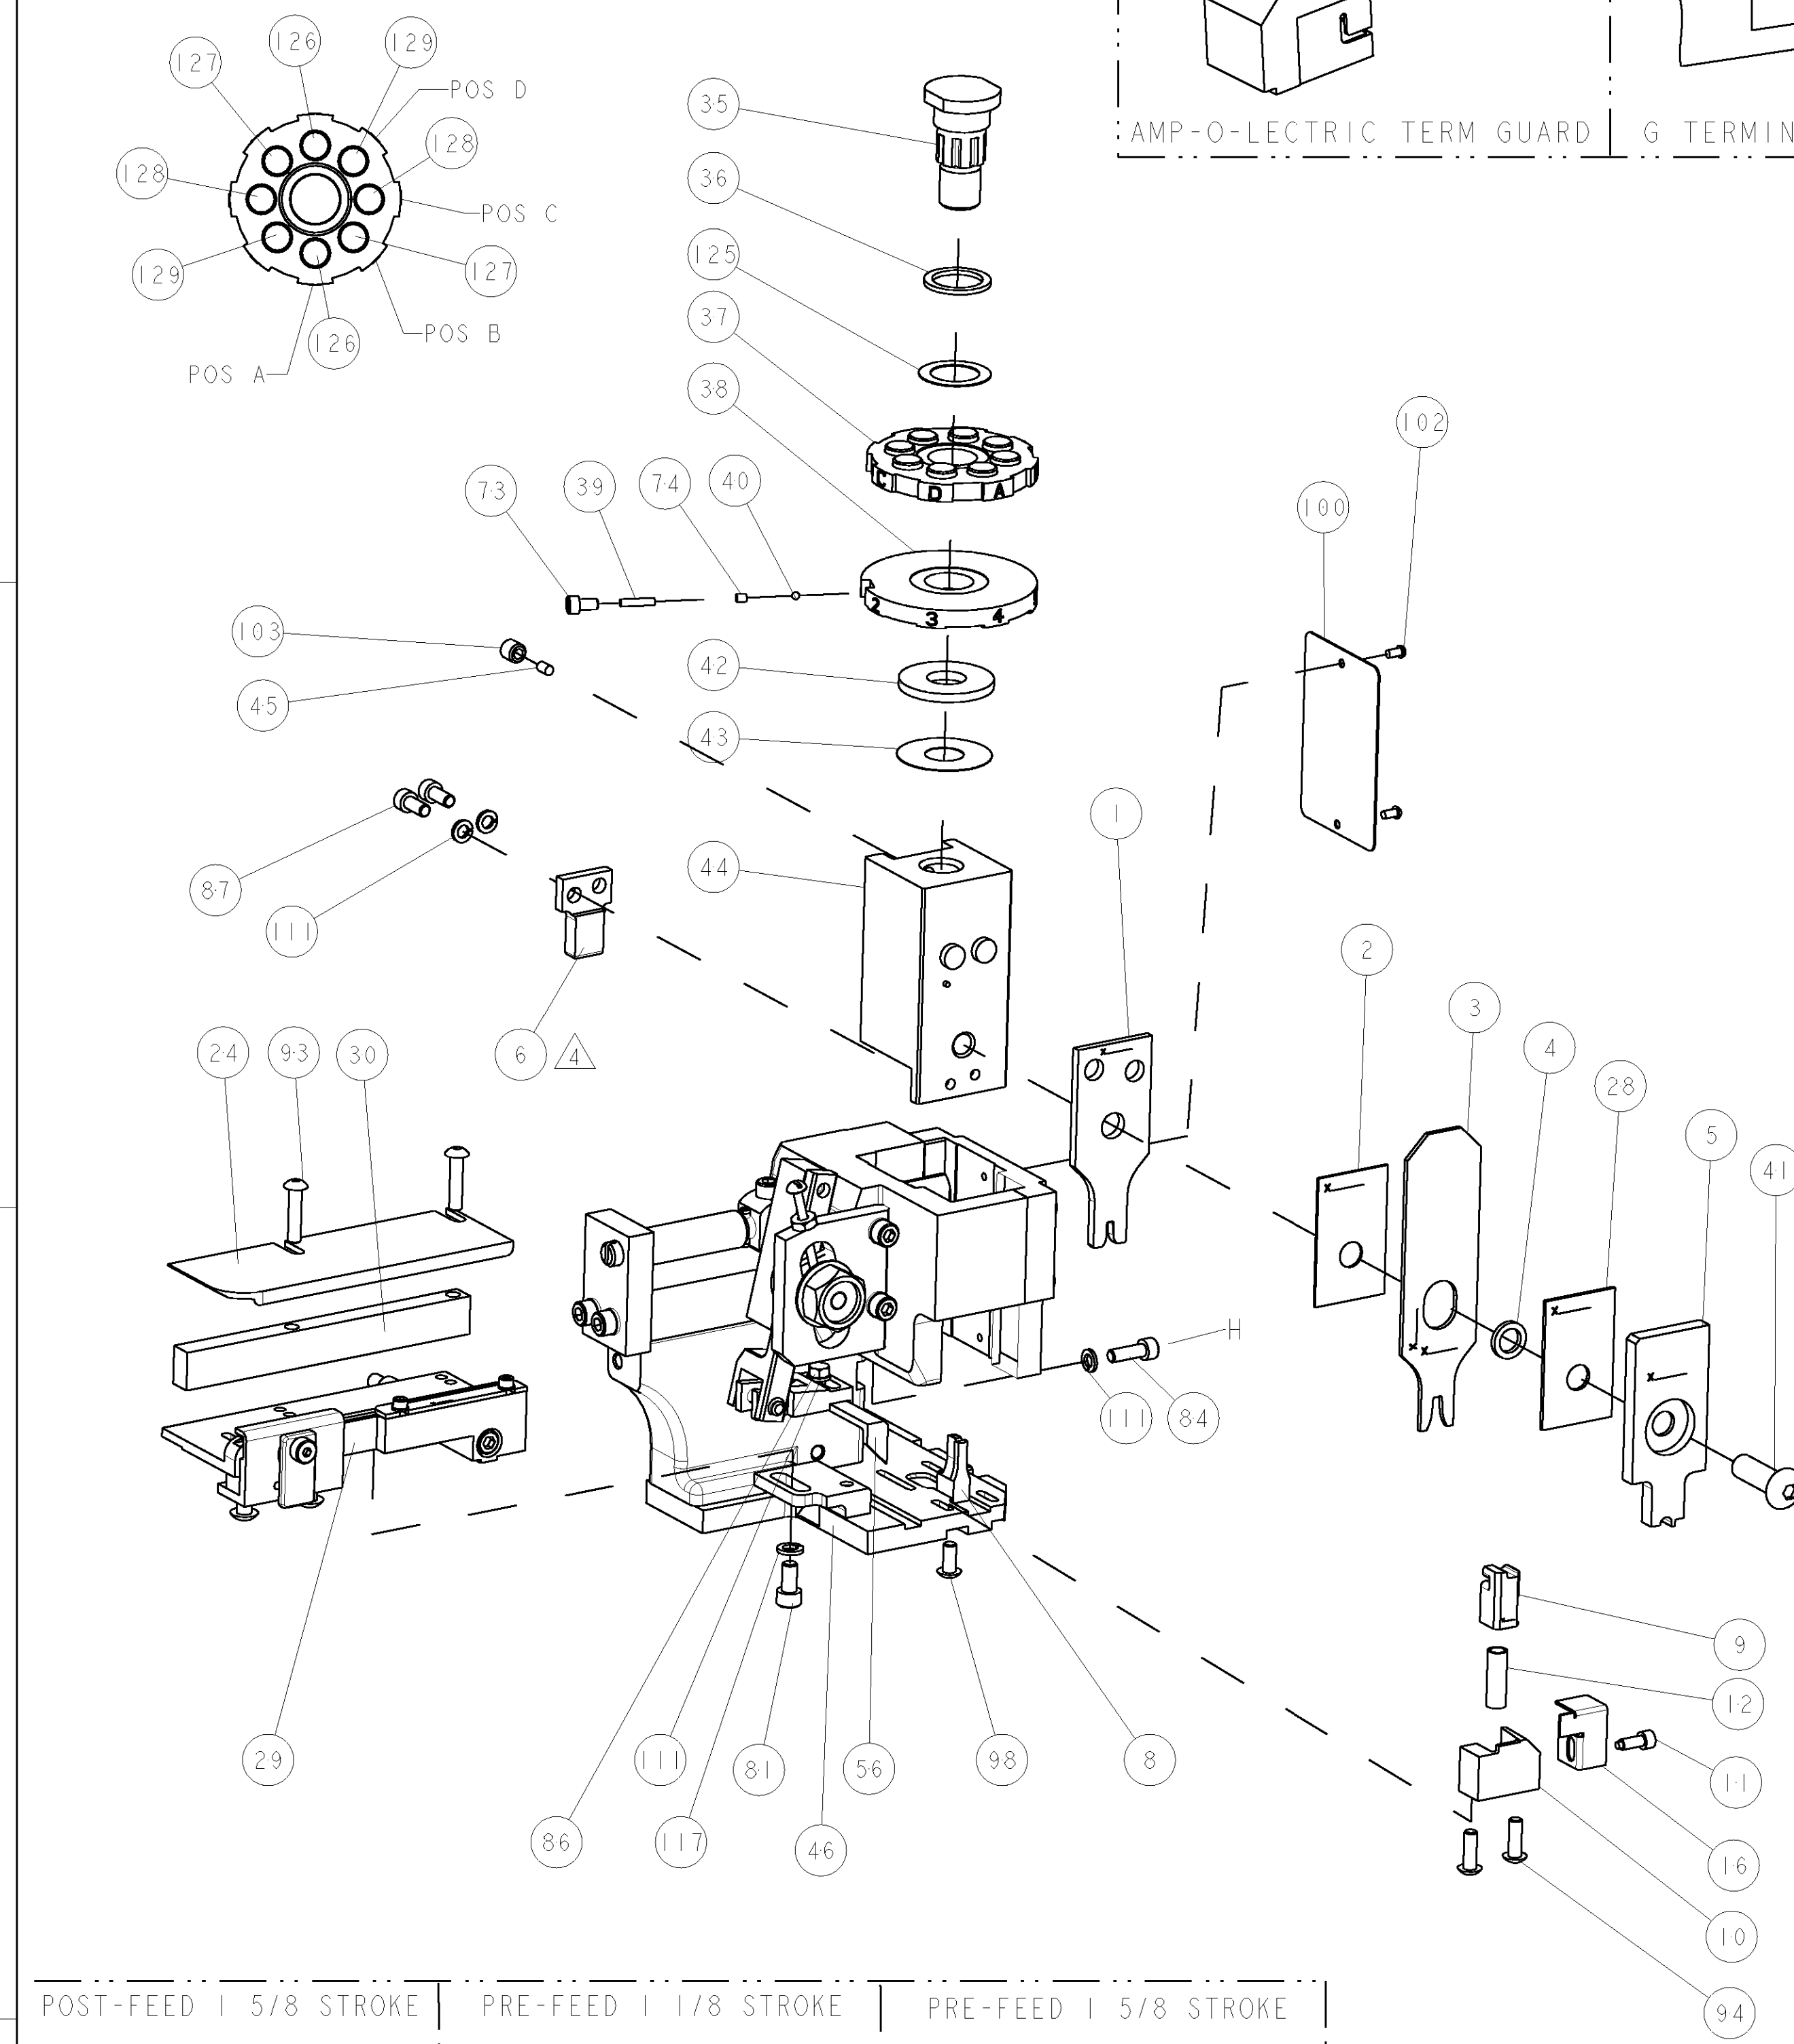

TERMINAL NAME: MAG-MATE POKE-IN TAB					
TERMINAL PN	AMP TERMINAL - AMP CRIMP SPECS				
281623	-				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	.058±.002[1.47±0.05mm]	1.00mm2	
-	-	B	.054±.002[1.37±0.05mm]	0.75mm2	
-	-	C	.050±.002[1.27±0.05mm]	0.50mm2	
-	-	D	.048±.002[1.22±0.05mm]	0.30mm2	
SEAL PN.	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.090 [2.28mm]	F	0.30-1.00mm2
-	-	INSUL	.140 [3.55mm]	F	Ø3.00mm MAX
WIRE STRIP LENGTH	156-188	TERM APPL SPEC	114-20003	FEED	.394
		APPL INSTRUCTIONS	408-8040	SET UP GAGE	458637-1

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ TONKER NEEDS ADJUSTED FOR EACH WIRE SIZE TO ACHIEVE 30° BEND OF THE TERMINAL.
- △ SPEC 114-20003 REQUIRES 90° BEND, CUSTOMER REQUESTS 30° DOWN BEND.

2	2	2	-	3-354779-6	PIN, WIRE DISC, .3170	129
2	2	2	-	3-354779-1	PIN, WIRE DISC, .3145	128
2	2	2	-	2-354779-2	PIN, WIRE DISC, .3100	127
2	2	2	-	1-354779-3	PIN, WIRE DISC, .3055	126
1	1	1	-	986950-1	WASHER, FLAT PRECISION	125
1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	124
1	1	1	-	4088040	SF APPL INST 408-8040	123
-	-	-	-	-	-	122
-	-	-	-	-	-	121
-	-	-	-	-	-	120
-	-	-	-	-	-	119
-	-	-	-	-	-	118
1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	117
-	-	-	-	-	-	116
-	-	-	-	-	-	115
-	-	-	-	-	-	114
-	-	-	-	-	-	113
-	-	-	-	-	-	112
4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	111
-	-	-	-	-	-	110
-	-	-	-	-	-	109
-	-	-	-	-	-	108
-	-	-	-	-	-	107
-	-	-	-	-	-	106
-	-	-	-	-	-	105
-	-	-	-	-	-	104
1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	103
2	2	2	-	21017-2	SCREW, DRIVE	102
-	-	-	-	-	-	101
1	1	1	-	461264-1	PLATE, IDENTIFICATION	100
-	-	-	-	-	-	99
1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	98
-	-	-	-	-	-	97
-	-	-	-	-	-	96
-	-	-	-	-	-	95
2	2	2	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	94
2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	93
-	-	-	-	-	-	92
1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	-	-	-	-	-	90
-	-	-	-	-	-	89
-	-	-	-	-	-	88
2	2	2	-	2-21000-6	SCR, SKT HD CAP 8-32 X .375	87
1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	86
-	-	-	-	-	-	85
1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	84
-	-	-	-	-	-	83
-	-	-	-	-	-	82
1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	81
-	-	-	-	-	-	80
-	REF	-	-	455749-1	GUARD WINDOW	79
-	REF	-	-	679532-1	INSERT, GUARD	78
-	-	-	-	-	-	77
-	-	-	-	-	-	76
-	-	-	-	-	-	75
-	-	-	-	-	-	74
1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	73
-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

LOC		DIST		REVISONS			
A	66	P	LTR	DESCRIPTION		DATE	DWN
		A		RELEASED		21JAN2005	LG
							GB

1	1	1	-	23030-1	SCR, SKT HD CAP 6-32 x .25	73
-	-	-	-	-	-	72
-	-	-	-	-	-	71
-	-	-	-	-	-	70
-	-	-	-	-	-	69
-	-	-	-	-	-	68
-	-	-	-	-	-	67
-	-	-	-	-	-	66
-	-	-	-	-	-	65
-	-	-	-	-	-	64
-	-	-	-	-	-	63
-	-	-	-	-	-	62
-	-	-	-	-	-	61
-	-	-	-	-	-	60
-	-	-	-	-	-	59
-	-	-	-	-	-	58
-	-	-	-	-	-	57
1	1	1	-	458537-2	PAWL, FEED	56
-	-	-	-	-	-	55
-	-	-	-	-	-	54
-	-	-	-	-	-	53
-	-	-	-	-	-	52
-	-	-	-	-	-	51
-	-	-	-	-	-	50
1	-	-	-	690602-6	CAM, PRE FEED, 1 5/8	49
-	1	-	-	690602-5	CAM, PRE FEED, 1 1/8	48
-	-	1	-	690501-4	CAM, POST FEED, 1 5/8	47
1	1	1	-	459456-1	APPL. BASIC SUB ASSEMBLY	46
1	1	1	-	690191-1	PLUG,NYLON	45
1	1	1	-	455673-1	RAM	44
1	1	1	-	690125-1	SHIM SUB-ASSY	43
1	1	1	-	690124-1	WASHER, RAM (.115)	42
1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
1	1	1	-	23241-6	BALL, STEEL	40
1	1	1	-	690170-1	SPRING, COMPRESSION	39
1	1	1	-	690142-1	DISC, INSULATION	38
1	1	1	-	354777-1	WIRE DISC, PLASTIC	37
1	1	1	-	22480-5	SPRING, COMPRESSION	36
1	1	1	-	690212-1	POST, RAM	35
-	-	-	-	-	-	34
-	-	-	-	-	-	33
-	-	-	-	-	-	32
-	-	-	-	-	-	31
1	1	1	-	1320908-8	SPACER, STRIP GUIDE	30
1	1	1	-	1633091-2	SUB-ASSEMBLY, FEEDTRACK	29
1	1	1	-	1-455888-0	SPACER, CRIMPER	28
-	-	-	-	-	-	27
-	-	-	-	-	-	26
-	-	-	-	-	-	25
1	1	1	-	1320928-3	PLATE, STRIP GUIDE	24
-	-	-	-	-	-	23
1	1	-	-	690472-9	STRIPPER	22
-	-	-	-	-	-	21
-	-	-	-	-	-	20
-	-	-	-	-	-	19
-	-	-	-	-	-	18
-	-	-	-	-	-	17
1	1	1	-	318563-1	GUARD, FRONT CHIP	16
-	-	-	-	-	-	15
-	-	-	-	-	-	14
-	-	-	-	-	-	13
1	1	1	-	5-22280-0	SPRING, COMPRESSION	12
1	1	1	-	690461-1	STOP, SHEAR	11
1	1	1	-	690459-1	SHEAR HOLDER, FRONT	10
1	1	1	-	454276-1	FLOATING SHEAR, FRONT	9
1	1	1	-	853224-2	ANVIL, COMBINATION	8
-	-	-	-	-	-	7
4	1	1	-	1-690639-4	BENDING TOOL	6
1	1	1	-	1-455889-4	DEPRESSOR, SHEAR	5
1	1	1	-	1-238011-6	BLOCK, CRIMPER SPACER	4
1	1	1	-	2-683453-7	CRIMPER, INSULATION	3
1	1	1	-	455888-6	SPACER, CRIMPER	2
1	1	1	-	4-456406-7	CRIMPER, WIRE	1

- △ 1
- △ 2
- △ 3
- △ 4
- △ 5

-3		-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. IT IS THE CUSTOMER'S RESPONSIBILITY TO OBTAIN THE LATEST REVISIONS OF THIS DRAWING. THE CUSTOMER'S RESPONSIBILITY TO OBTAIN THE LATEST REVISIONS OF THIS DRAWING. THE CUSTOMER'S RESPONSIBILITY TO OBTAIN THE LATEST REVISIONS OF THIS DRAWING.							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		DATE	
INCHES		9 PLC ±.01		L. GROSS		05JAN2005	
		3 PLC ±.01		R. KNEPPER		05JAN2005	
		5 PLC ±.01		APVD			
		4 PLC ±.0001		PRODUCT SPEC			
		FINISH		APPLICATION SPEC			
MATERIAL				WEIGHT			
				CUSTOMER DRAWING			
				SCALE		3:5	
				SHEET		1 OF 1	
				REV		A	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9