

MICRO SWITCH




FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED. MFG CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING

1EN342-R

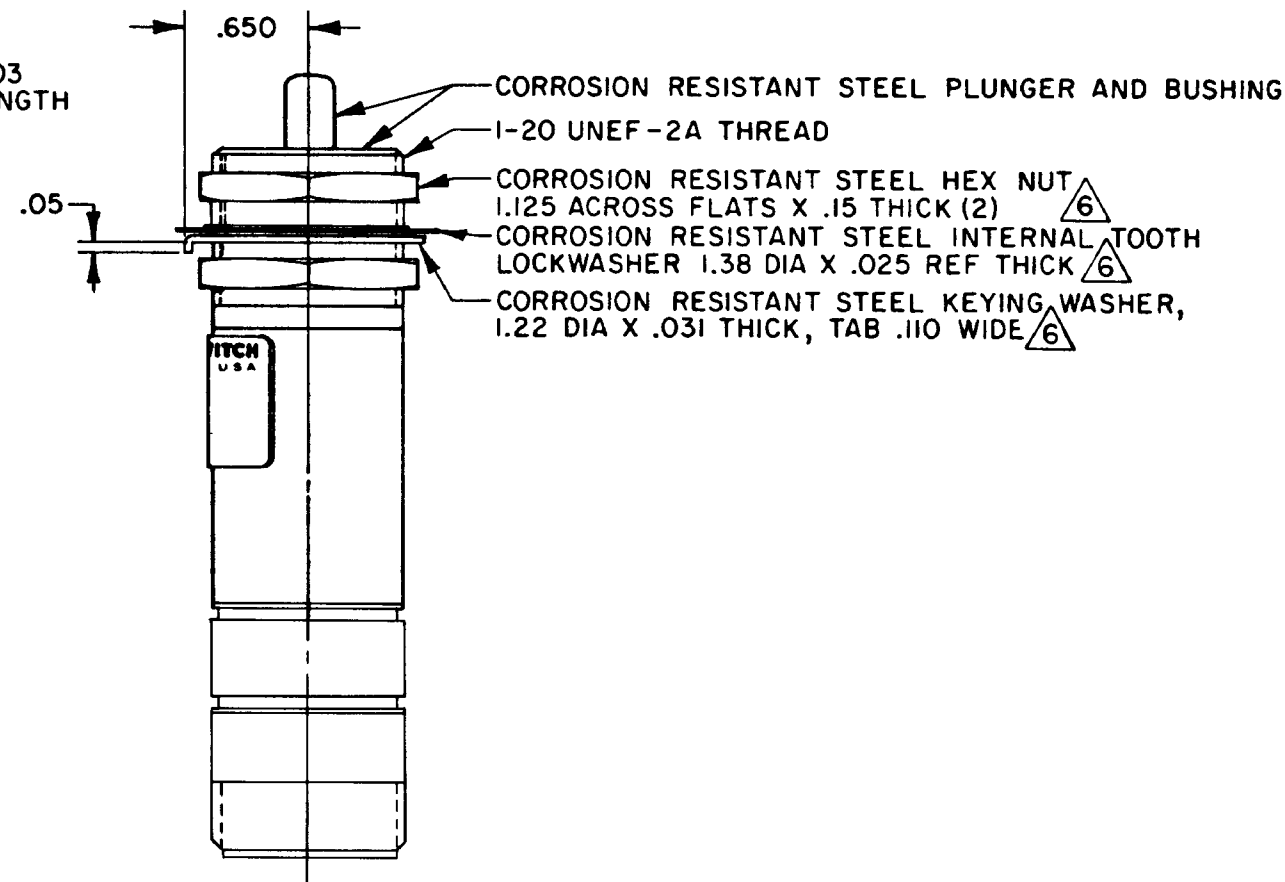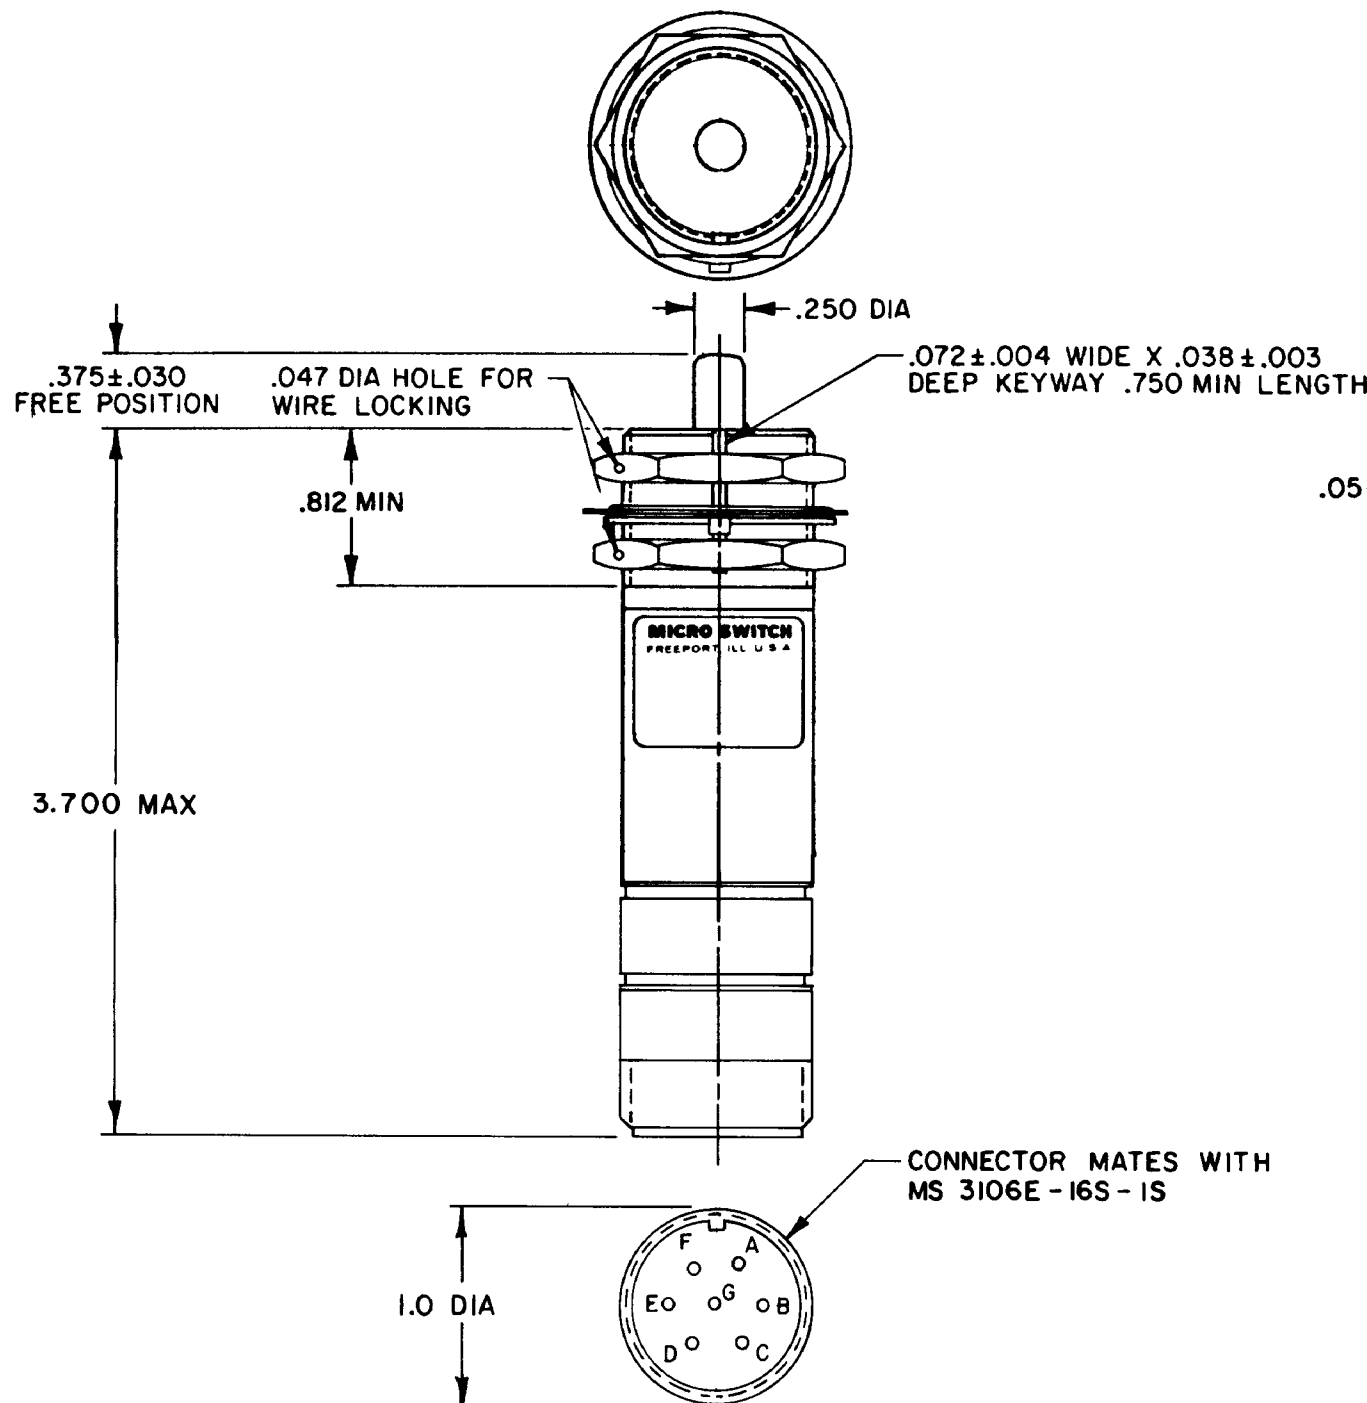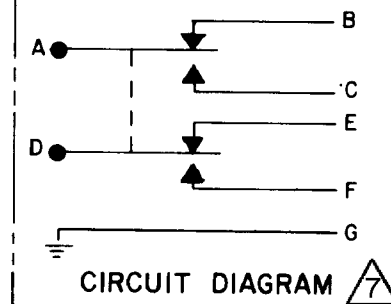

NOTES

- 1 - COLD ROLLED STEEL ENCLOSURE FINISHED WITH GREEN EPOXY BASED ENAMEL COLOR NO. 34151 PER FEDERAL STANDARD
- 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
- 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
- 4 - ALL EXTERNAL PARTS ARE MADE OF OR TREATED WITH CORROSION RESISTANT MATERIAL
- 5 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 6 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
- 7 - RESISTANCE BETWEEN PIN "G" AND THREADED BUSHING MEASURED PER MIL-STD-202, METHOD 303, NOT TO EXCEED 1.0 OHMS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES			
ONE PLACE	X	1/64	X X
TWO PLACES	X,XX	0.01/0.16	X X X
THREE PLACES	X,XXX	0.001/0.005	X X X X

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

RAW MATERIAL—COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT 7.0 OZ MAX

FORMTEK

CHARACTERISTICS

OPERATING FORCE ——— 6-12 LB
FULL OVERTRAVEL FORCE — 30 LB MAX
RELEASE FORCE ——— 4 LB MIN
PRETRAVEL ——— .040 MAX
DIFFERENTIAL TRAVEL — .020 MAX
OVERTRAVEL ——— .250 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT (2)

LOAD	28 VDC
RES	SEA LEVEL
IND	5
MOTOR	3
	4

1EN342-R

PAGE 1 OF 1

REPLACES

PR-5967

DRAWING NUMBER

ISSUE

REVISIONS

A	CO44351	PART 1
4	WJM	APR 79
B	CO47573	
5	J A P	AUG 80
C	CO68547	
15	SAV	OCT 90
D	CO73874	
5	Y SM	DEC 92
E	CO-92255	
10	J A P	FEB 98

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

FO-32831-A

DRAWN

WJM 4 APR 79

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9