
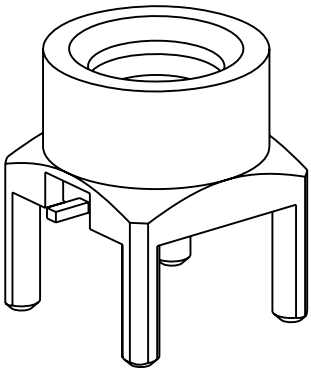


- NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, GOLD PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - LCP
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. RETURN LOSS: 26 dB MIN, DC TO 6 GHz
20 dB MIN, 6 TO 12.4 GHz
C. INSERTION LOSS: 0.05*SQRT(f) dB MAX ; "f" IN GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. PHYSICAL:
A. DURABILITY: 500 CYCLES MIN.
B. ENGAGEMENT FORCE: 10 LBS [45 N] MAX
C. DISENGAGEMENT FORCE: 2 LBS [9 N] MIN
D. INNER CONTACT RETENTION FORCE: 1.5 LB [7 N] MIN
E. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. PACKAGE CONNECTOR AS PER ROUTING INSTRUCTIONS.
B. MARK BAG OR TAG "SMP-MSLD-PCT-4, AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG	9/1/06	46191	MY
B	INSULATOR WAS CHANGED	07-May-07	- - -	ANGELA
C	SYNCH THE DRAWING WITH DANBURY	07-Nov-12	49307	SH
D	ELECTRICAL SPEC UPDATE	15-Jul-13	49648	MJD
E	1.27±0.12 WAS 1.3±0.12, \RD-13091001J8	24-Sep-13	49741	MD

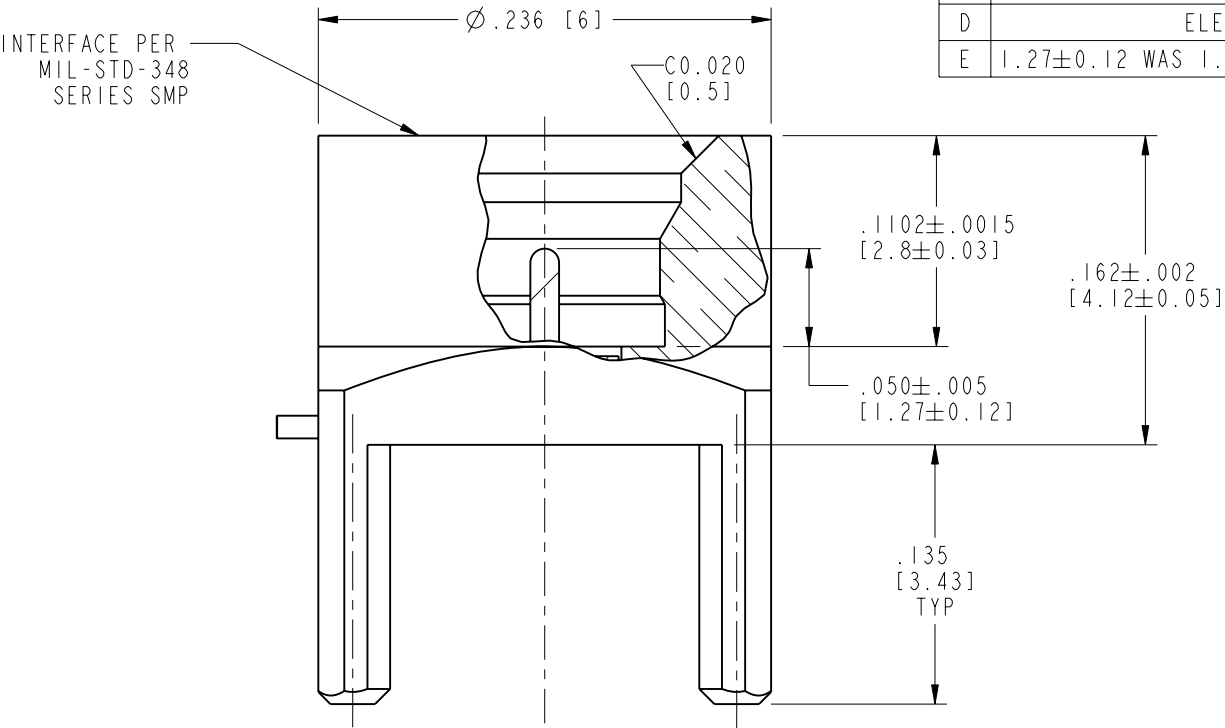

SCALE 5.000

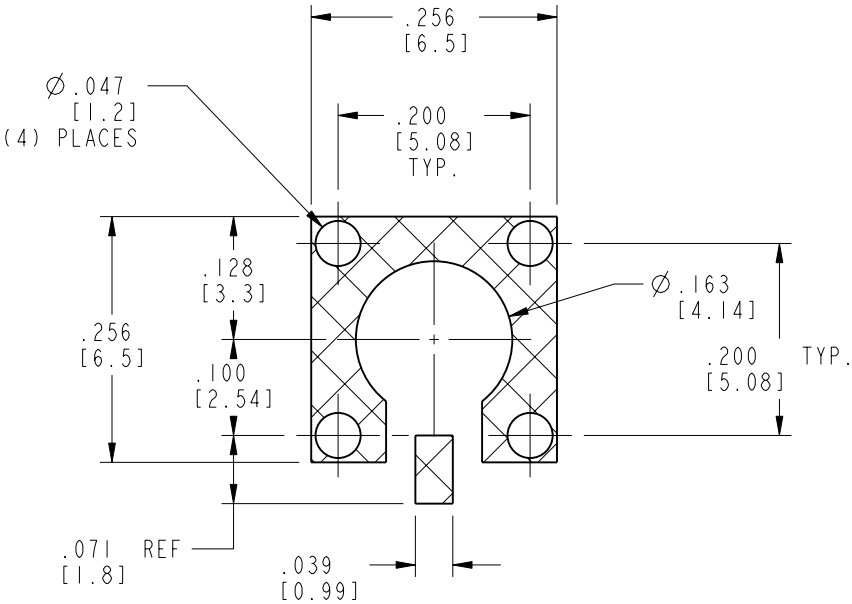

RECOMMENDED PCB FOOTPRINT
SCALE 5.000

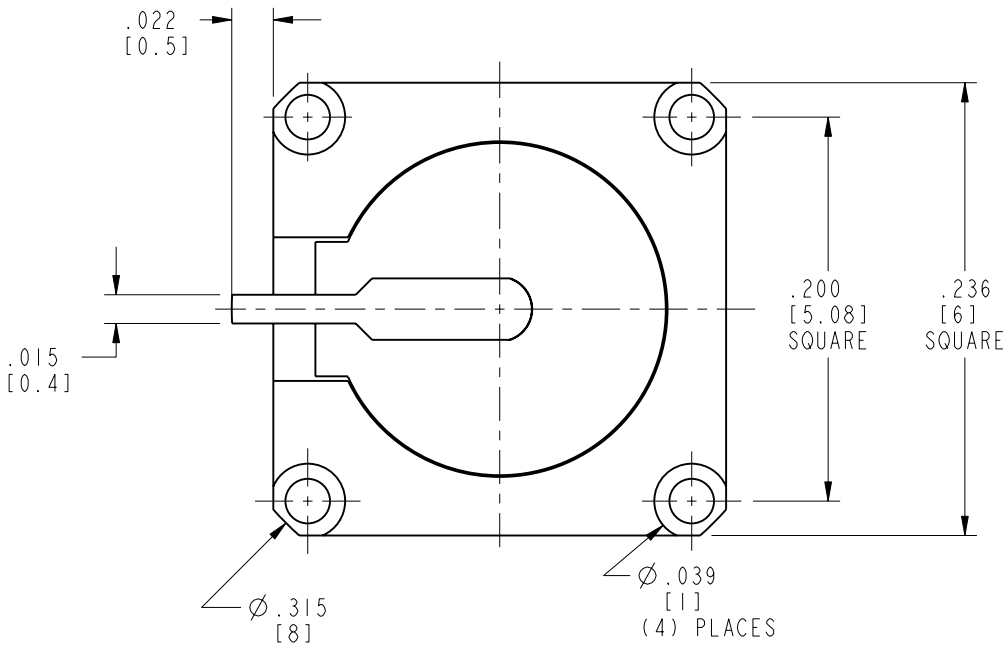

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES
±.015 (0.381 mm) ±.005 (0.127 mm) ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

DRAWN
J. CHEN

DATE
24-Sep-13

ENGINEER
H. PARIKH

DATE
08-Aug-06

REFERENCE
EAR#2143
REF SMP-MSLD-PCT
CONFIGURATION LEVEL:

APPROVED
S. HSIEH

DATE
27-Sep-13

CAD FILE

FINISH

TITLE
SMP JACK, PIN CONTACT
LIMITED DETENT

SCALE: 10.0:1.0 SHEET 2 OF 2

DWG SIZE
B

REV
E

Amphenol RF

www.amphenolrf.com

DRAWING NO. SMP-MSLD-PCT-4

ITEM NO. SMP-MSLD-PCT-4

PART NO. SMP-MSLD-PCT-4

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9