
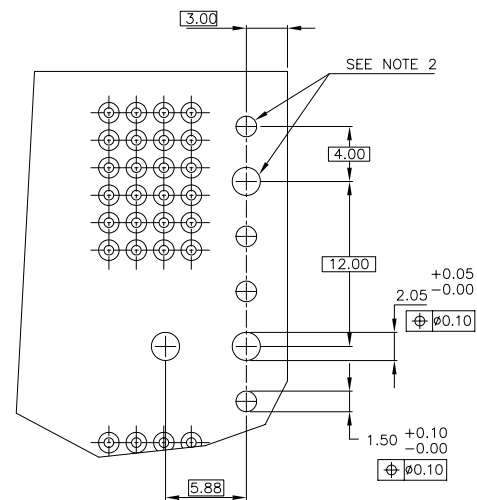
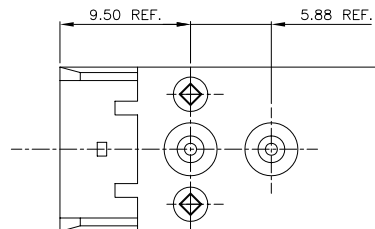

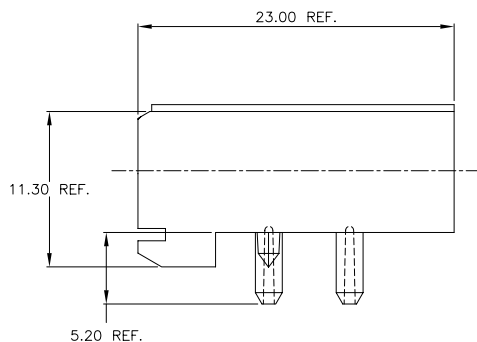


PRODUCT NUMBER	DESCRIPTION
88917-101 & -101LF	HEAT STAKE VERSION

FRONT VIEW



REQUIRED PC BOARD LAYOUT COMPONENT SIDE





NOTE:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED
- PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecr	no	dr	date	tolerances unless otherwise specified	mm	title
F	C80040	MDF		7/23/98	angles	xx ±.01/.3	RECEPTACLE GUIDE MODULE, 4 ROW
G	H80473	MDF		7/23/98	linear	xxx ±.005/.13	
H	V02701	JWS		10/19/00	0°±2'	xxxx ±.0020/.050	scale 1:1
J	V11668	LSS		6/13/01	dr	S. STONER	9/30/93
K	V12868	CGD		1/02/02	enr	R. DOUTRICH	9/30/93
L	M05-0262	MHT		12/20/05	chr	S. STONER	9/30/93
M	M06-0286	MNR		7/27/06	appd	S. STONER	9/30/93
sheet	revision	M	M	M	M		
index	sheet	1	2	3	4		

PRODUCT NUMBER	DESCRIPTION
88917-201 & -201LF	PRESS-PEG VERSION

FRONT VIEW

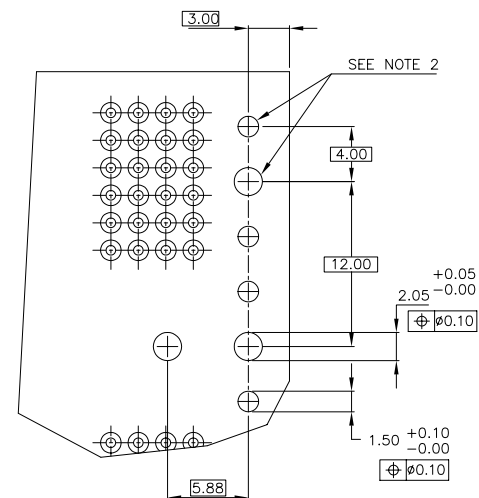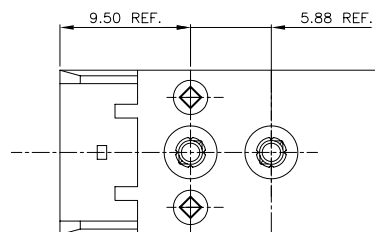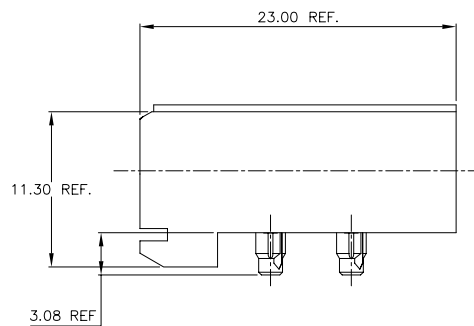


REQUIRED PC BOARD LAYOUT
COMPONENT SIDE

NOTE:





- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED
- PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
M					angles	linear	RECEPTACLE GUIDE MODULE, 4 ROW
					0°±2'	xxx ±.01/.3 xxx ±.005/.13 xxxx ±.0020/.050	mm
					dr	S. STONER 9/30/93	scale 1:1
					enr	R. DOUTRICH 9/30/93	FCI
					chr	S. STONER 9/30/93	dwg no 88917 sheet 2 of 4 size A3
					appd	S. STONER 9/30/93	type Product Customer Drawing
sheet index	revision sheet						

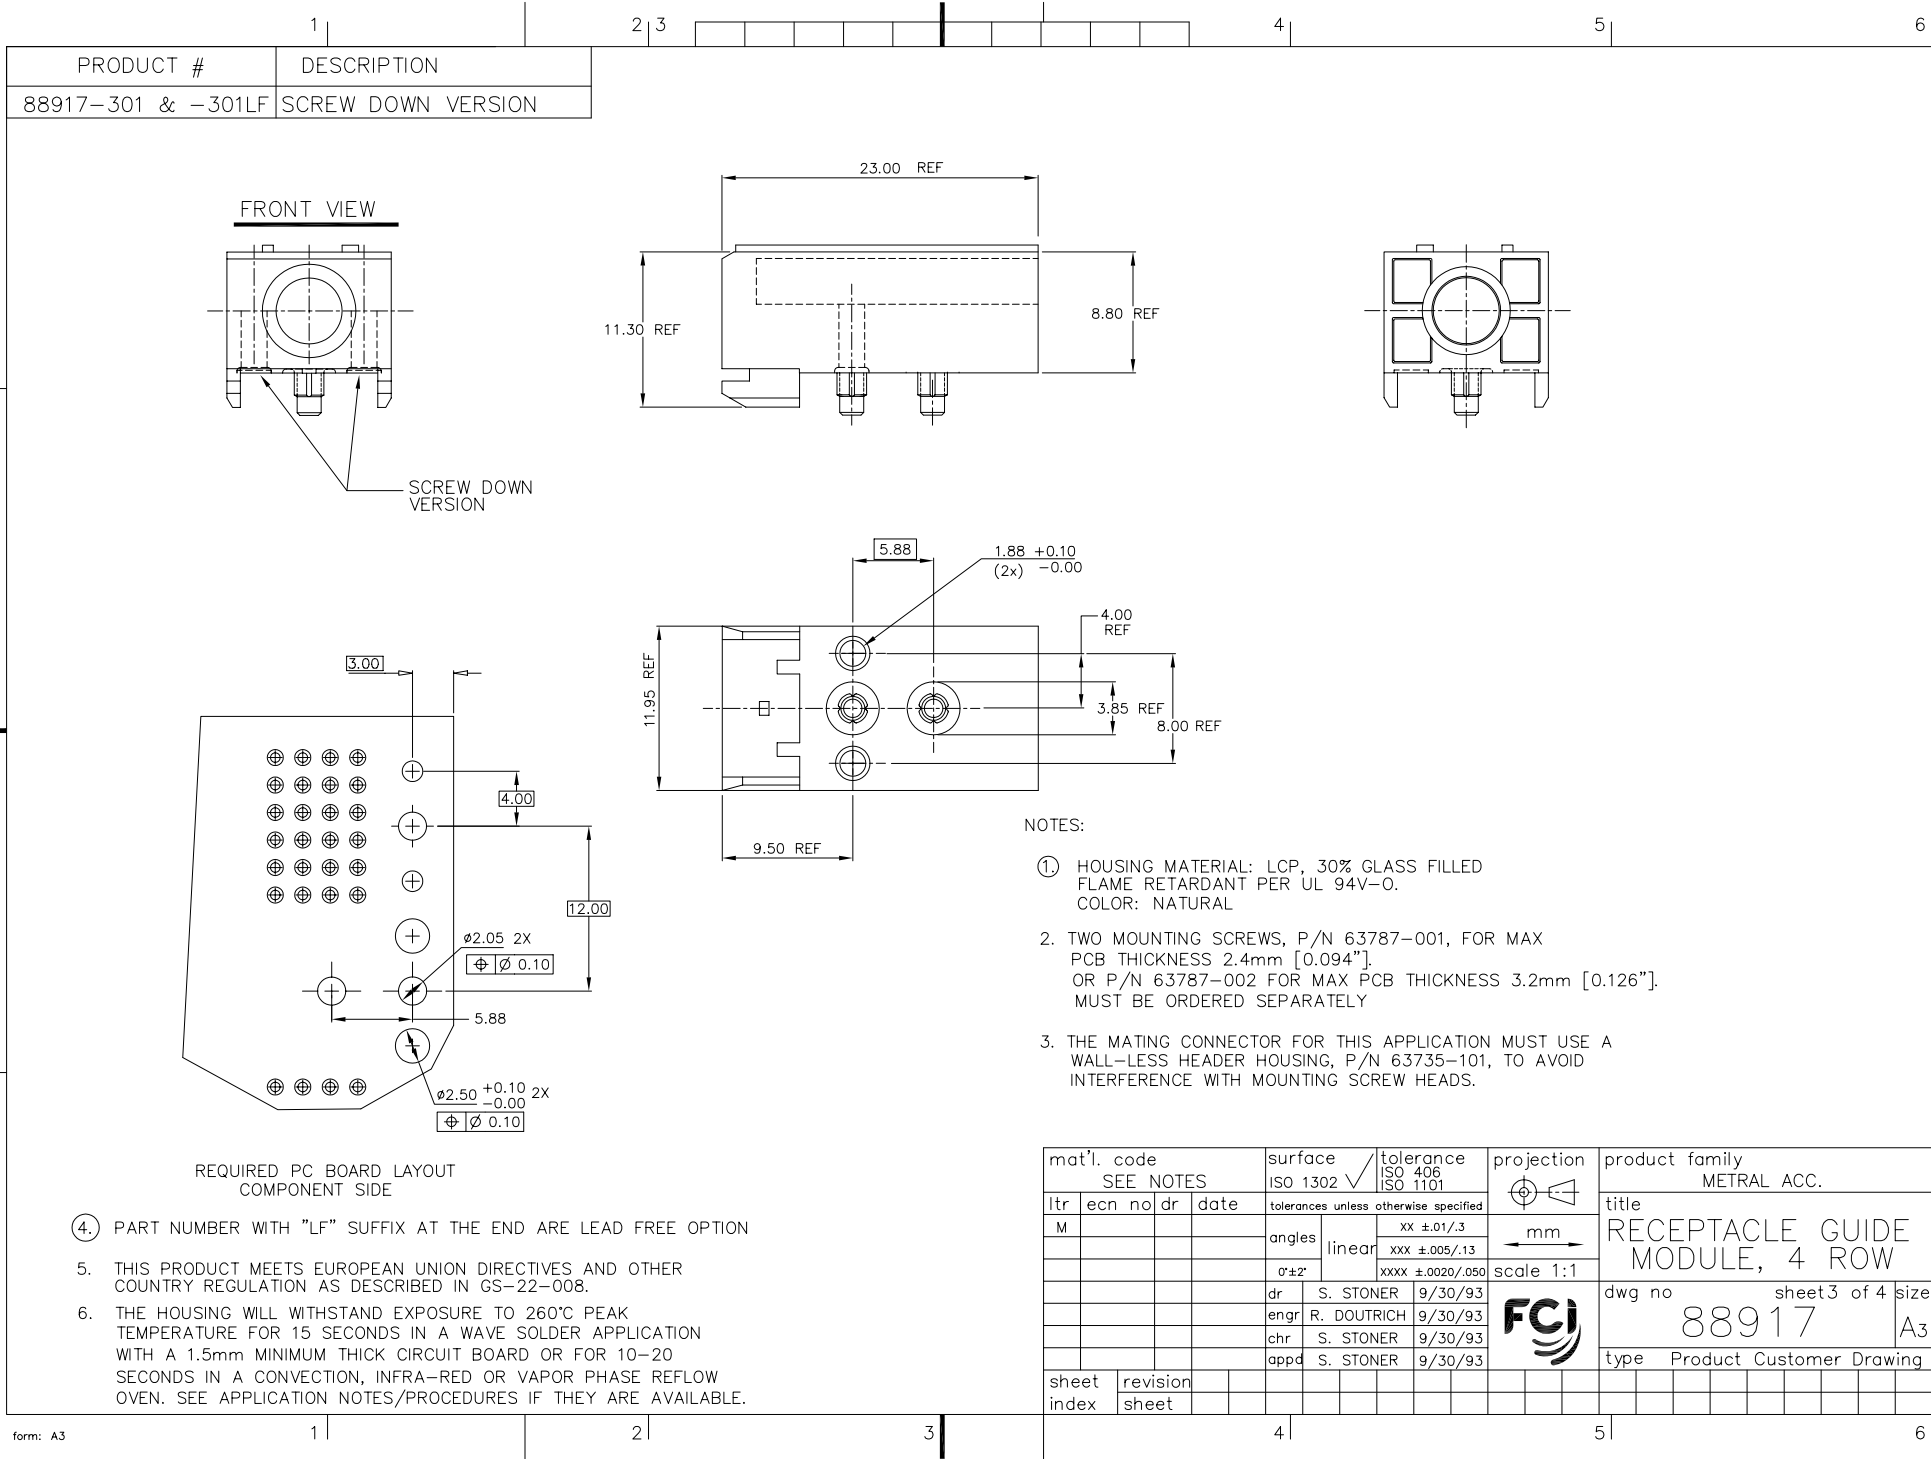

PRODUCT #	DESCRIPTION
88917-401 & -401LF	CLAW RETENTION VERSION

FRONT VIEW

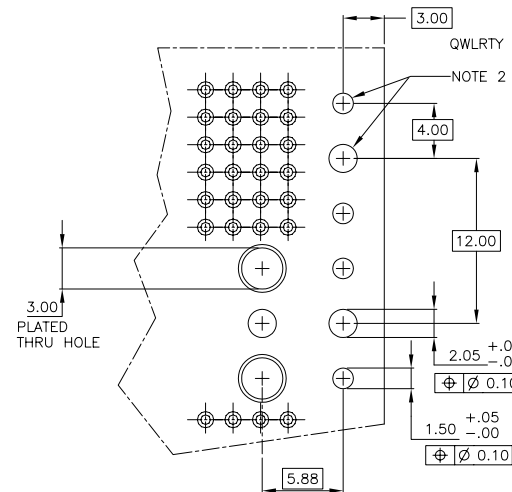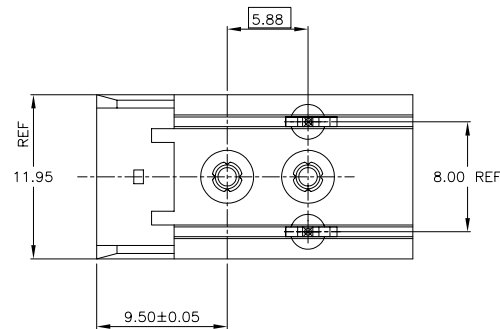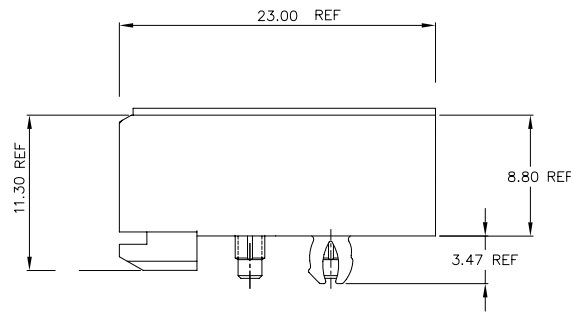

REQUIRED P.C. BOARD LAYOUT
COMPONENT SIDE

NOTES:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED.

③ PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION

- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
M					angles linear	mm	RECEPTACLE GUIDE MODULE, 4 ROW
					0°±2'	scale 1:1	
			dr	S. STONER	9/30/93	FCI	dwg no
			enr	R. DOUTRICH	9/30/93		88917
			chr	S. STONER	9/30/93		sheet 4 of 4
			appd	S. STONER	9/30/93		A3
sheet index	revision sheet						type Product Customer Drawing

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9