



4

3




2

1


LOC	DIST	REVISIONS				
DW	—	P	LTR	DESCRIPTION	DATE	APVD
			A1	REVISED PER ECO-11-005301	6APR11	RK HMR

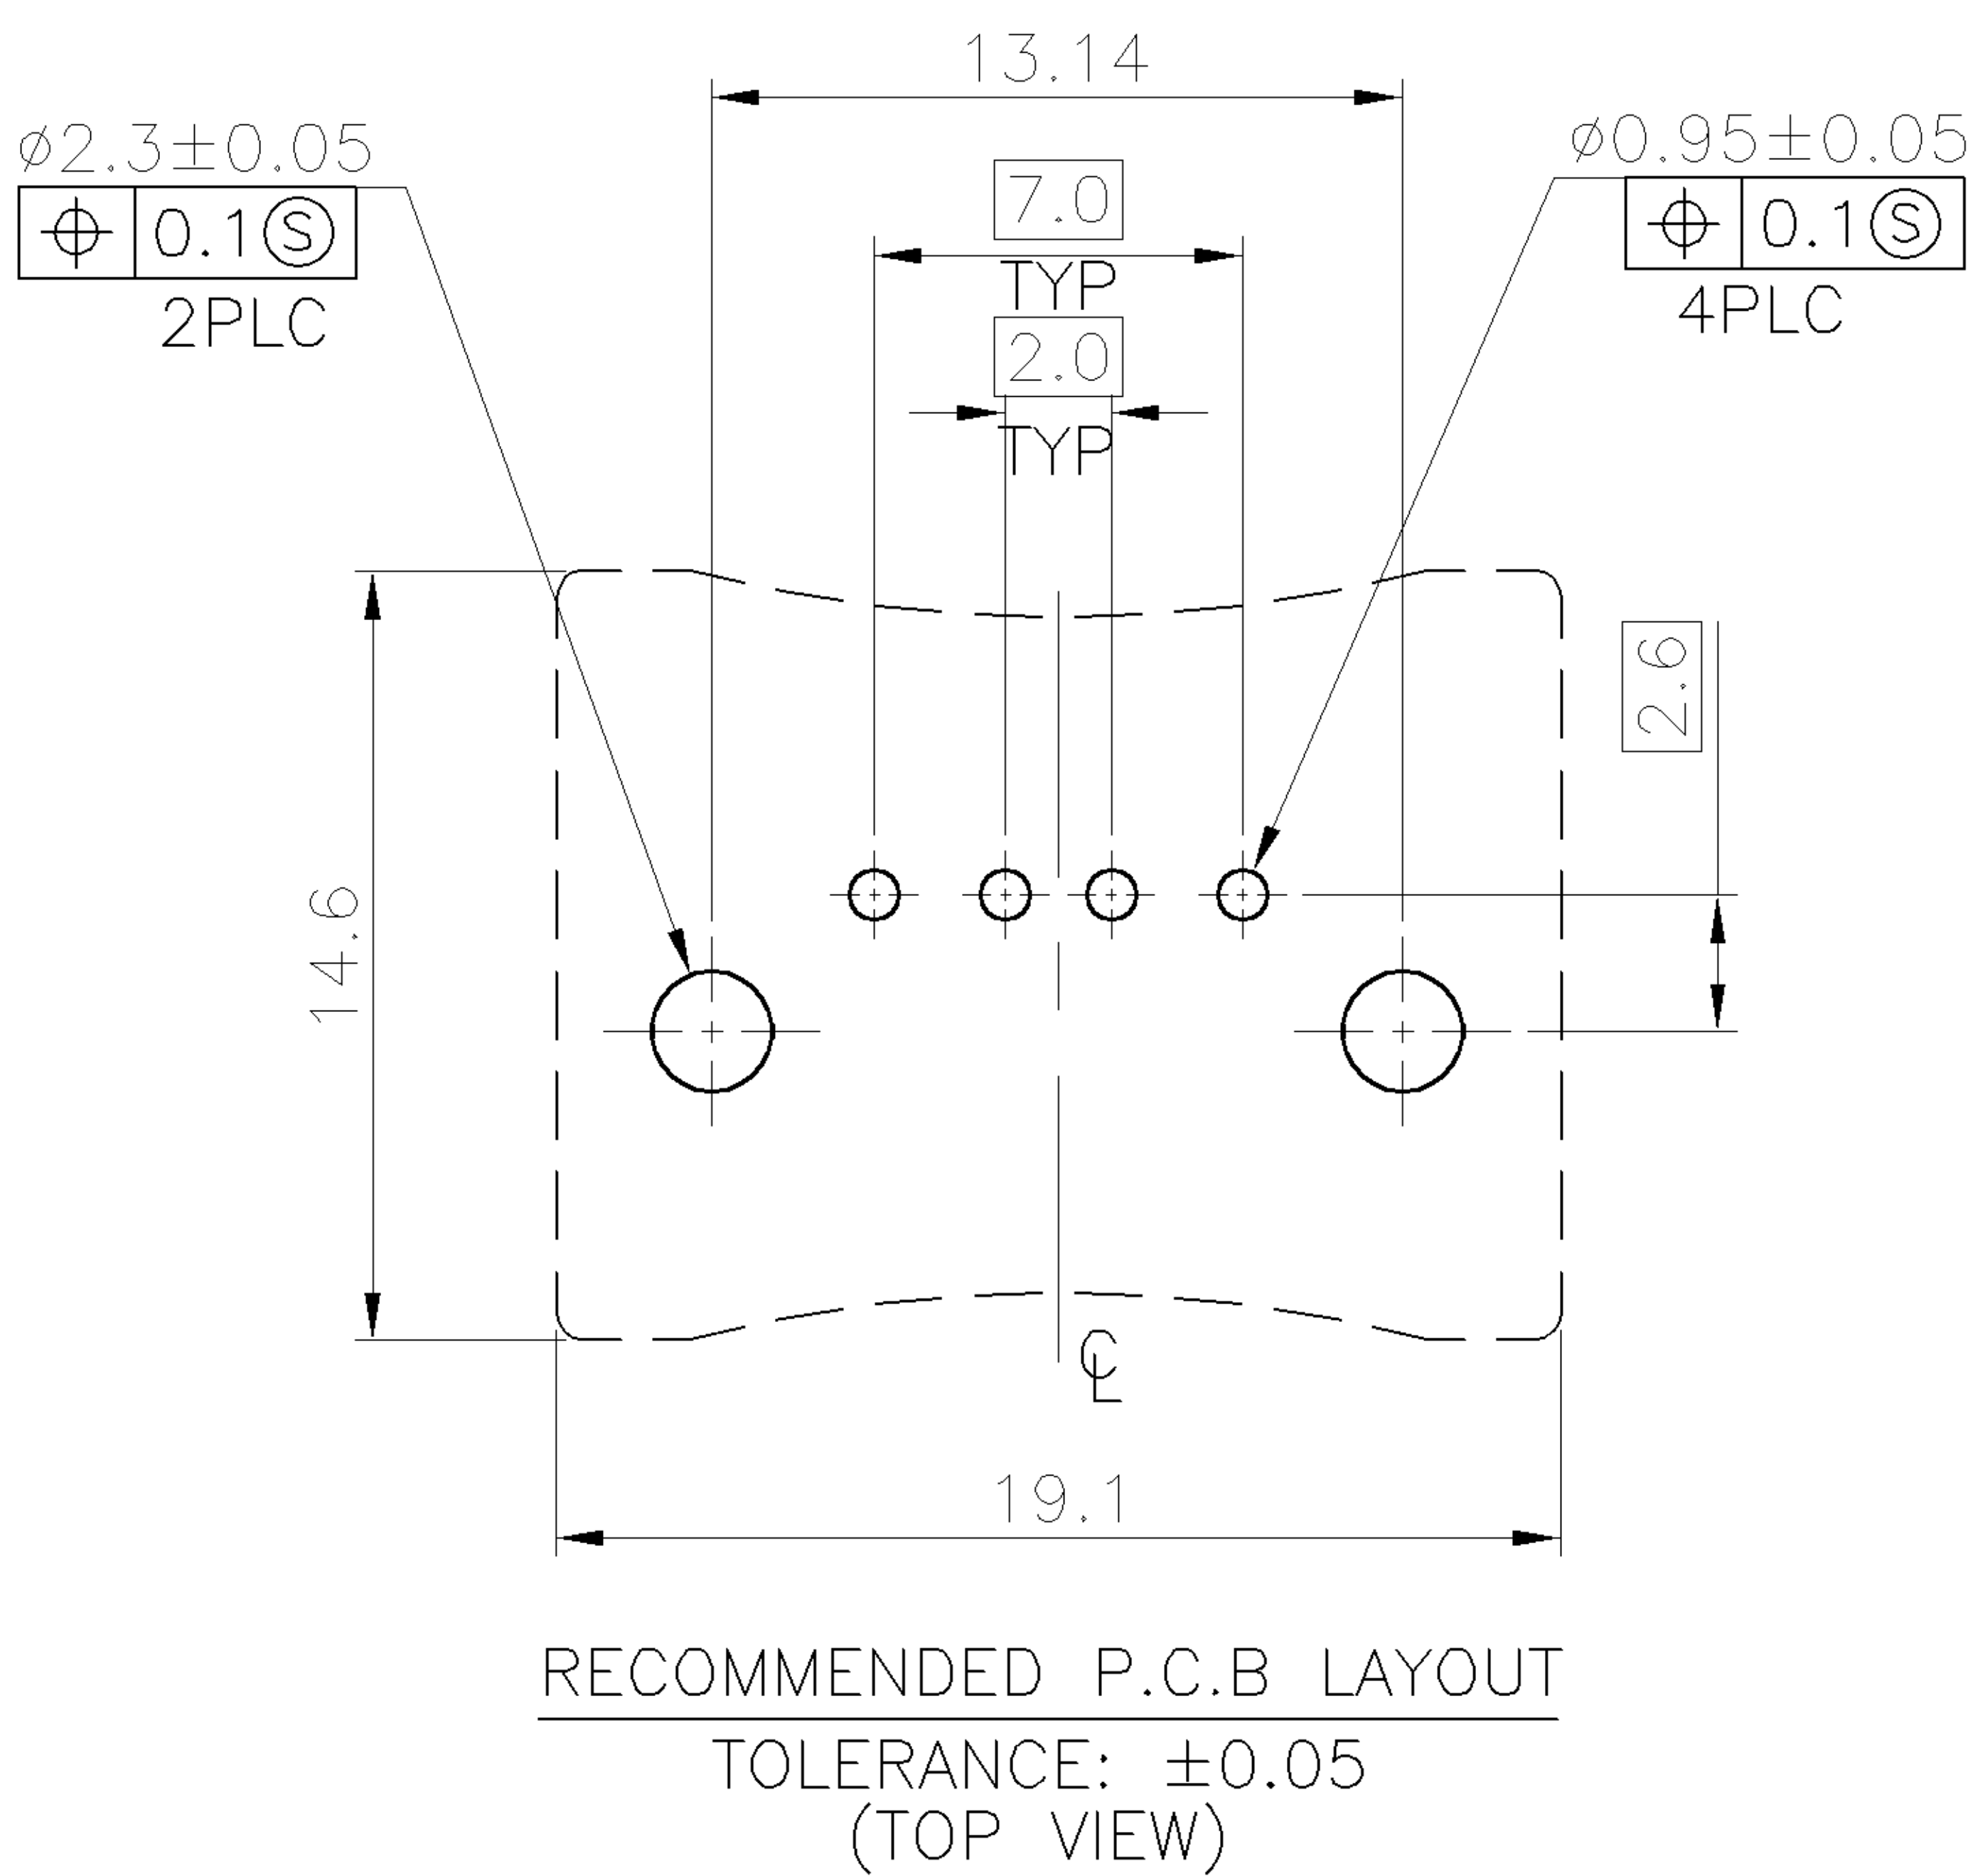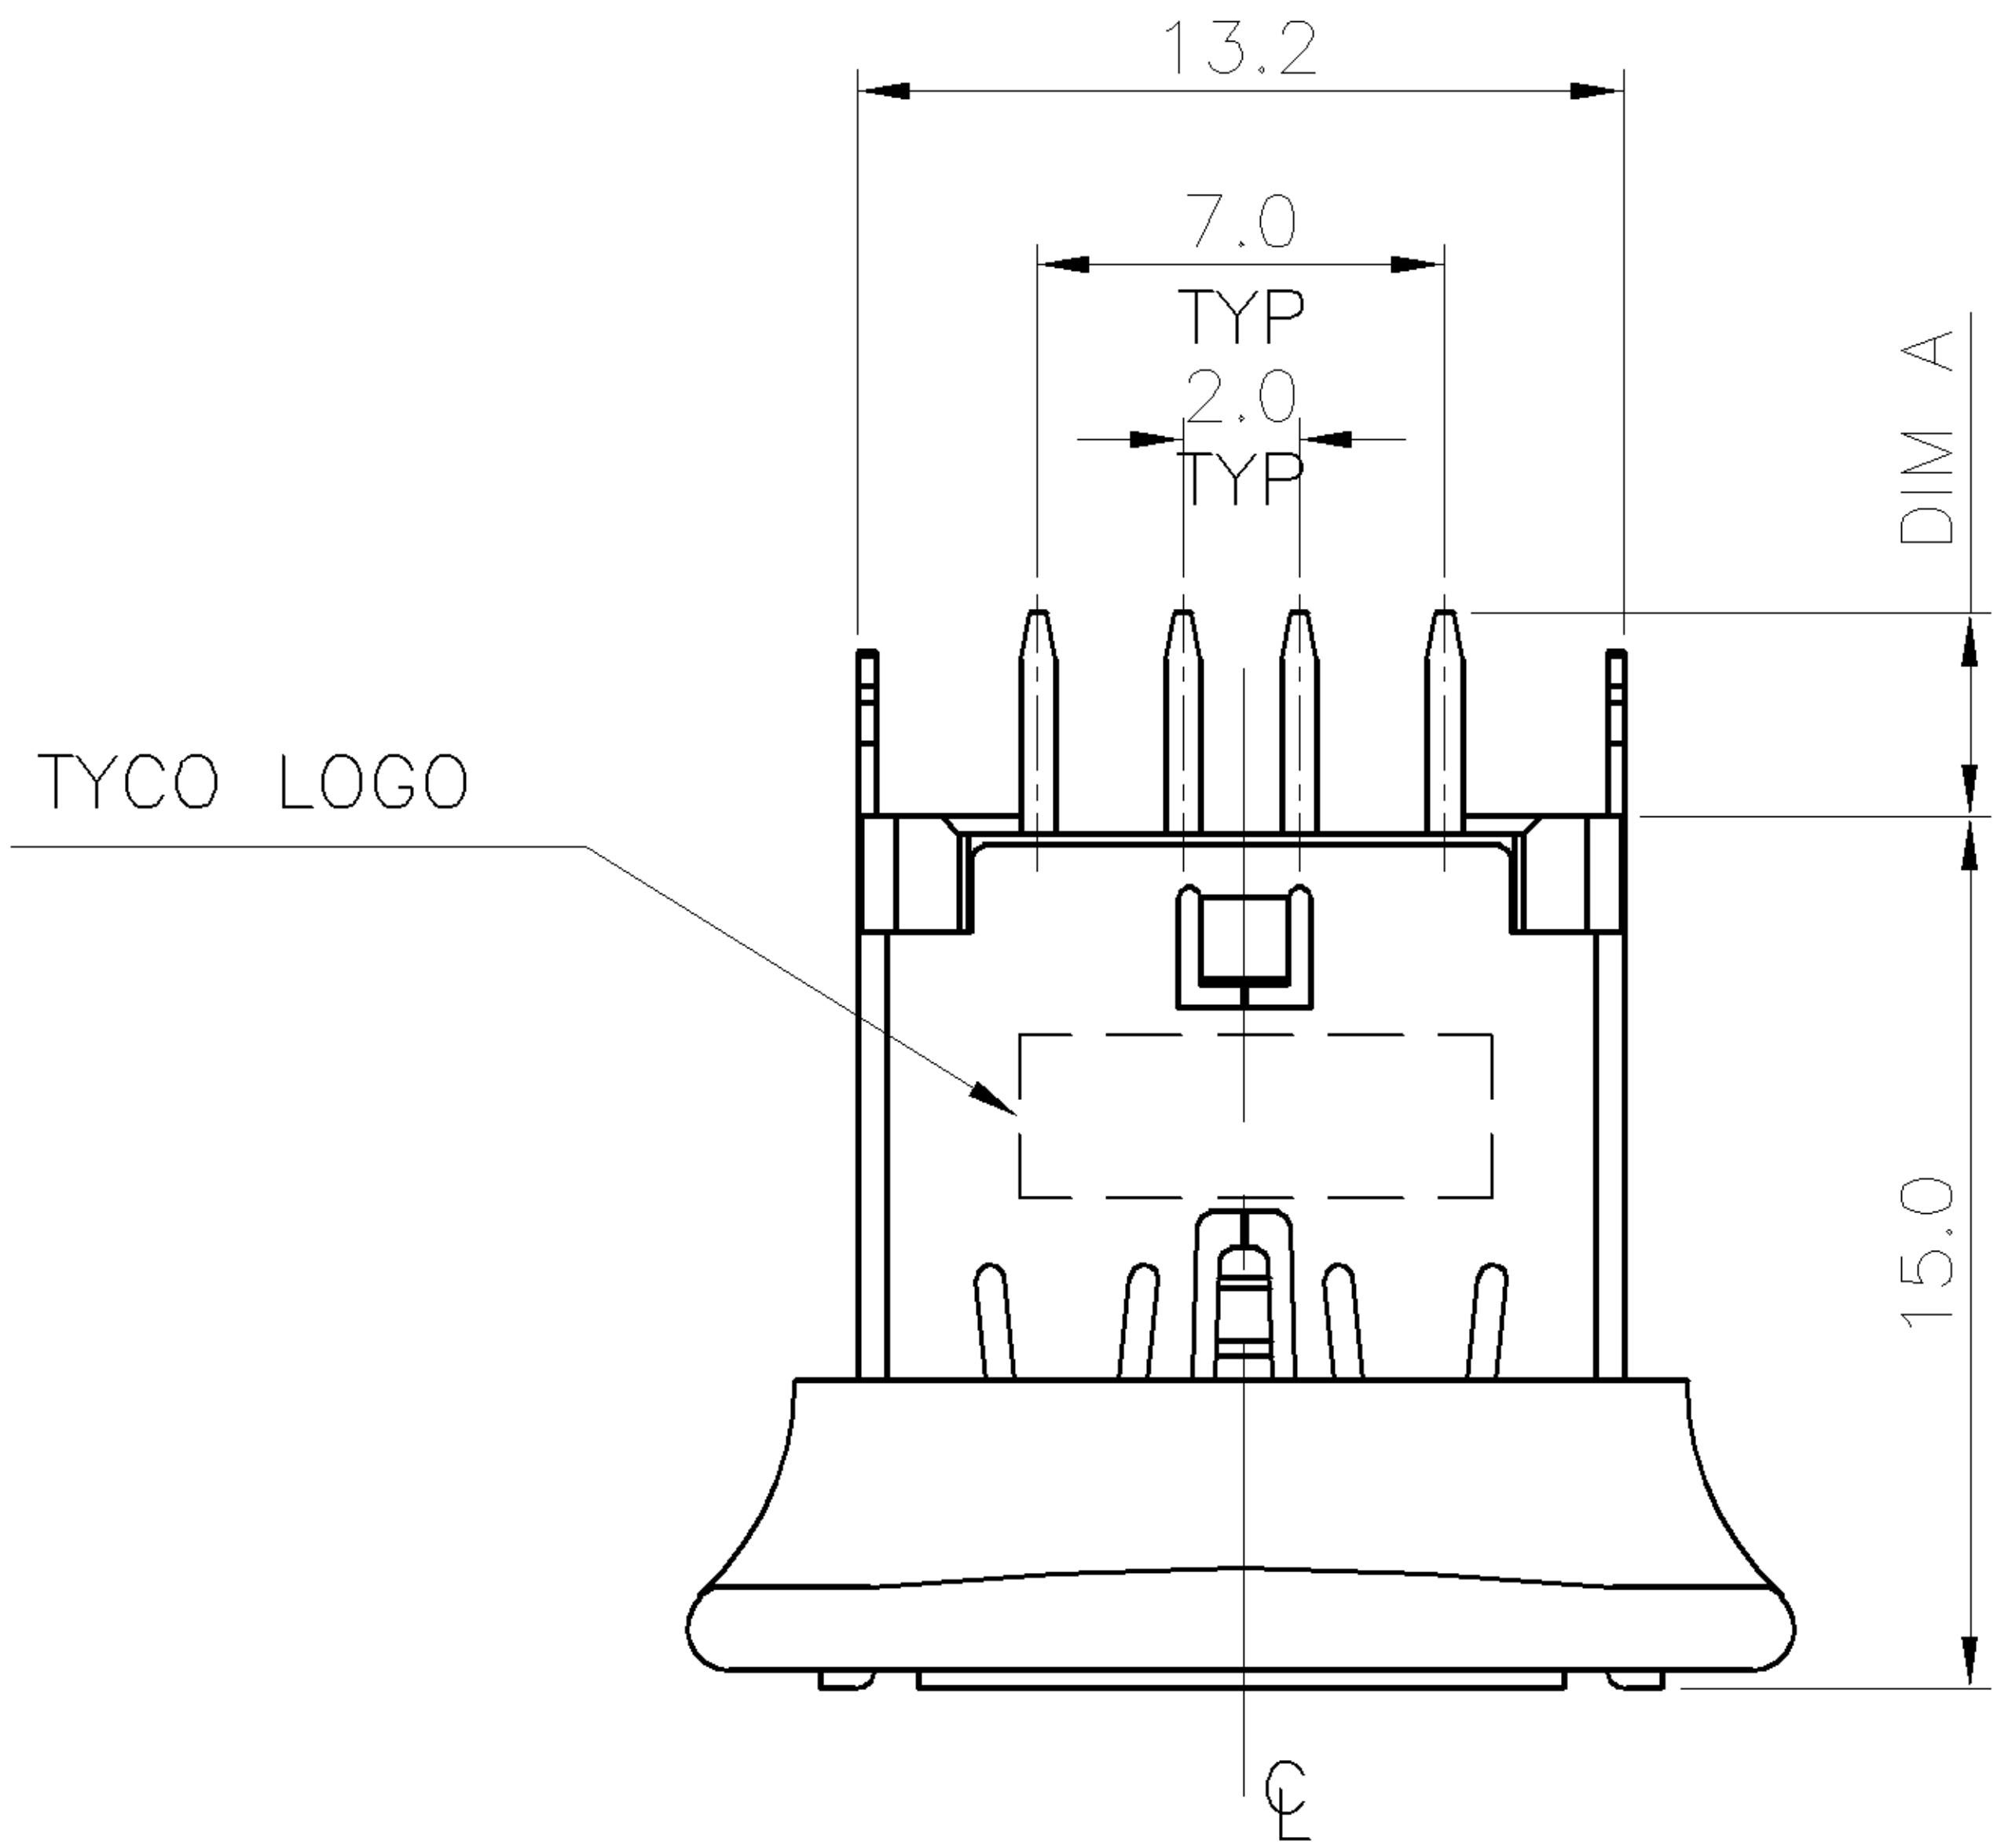

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

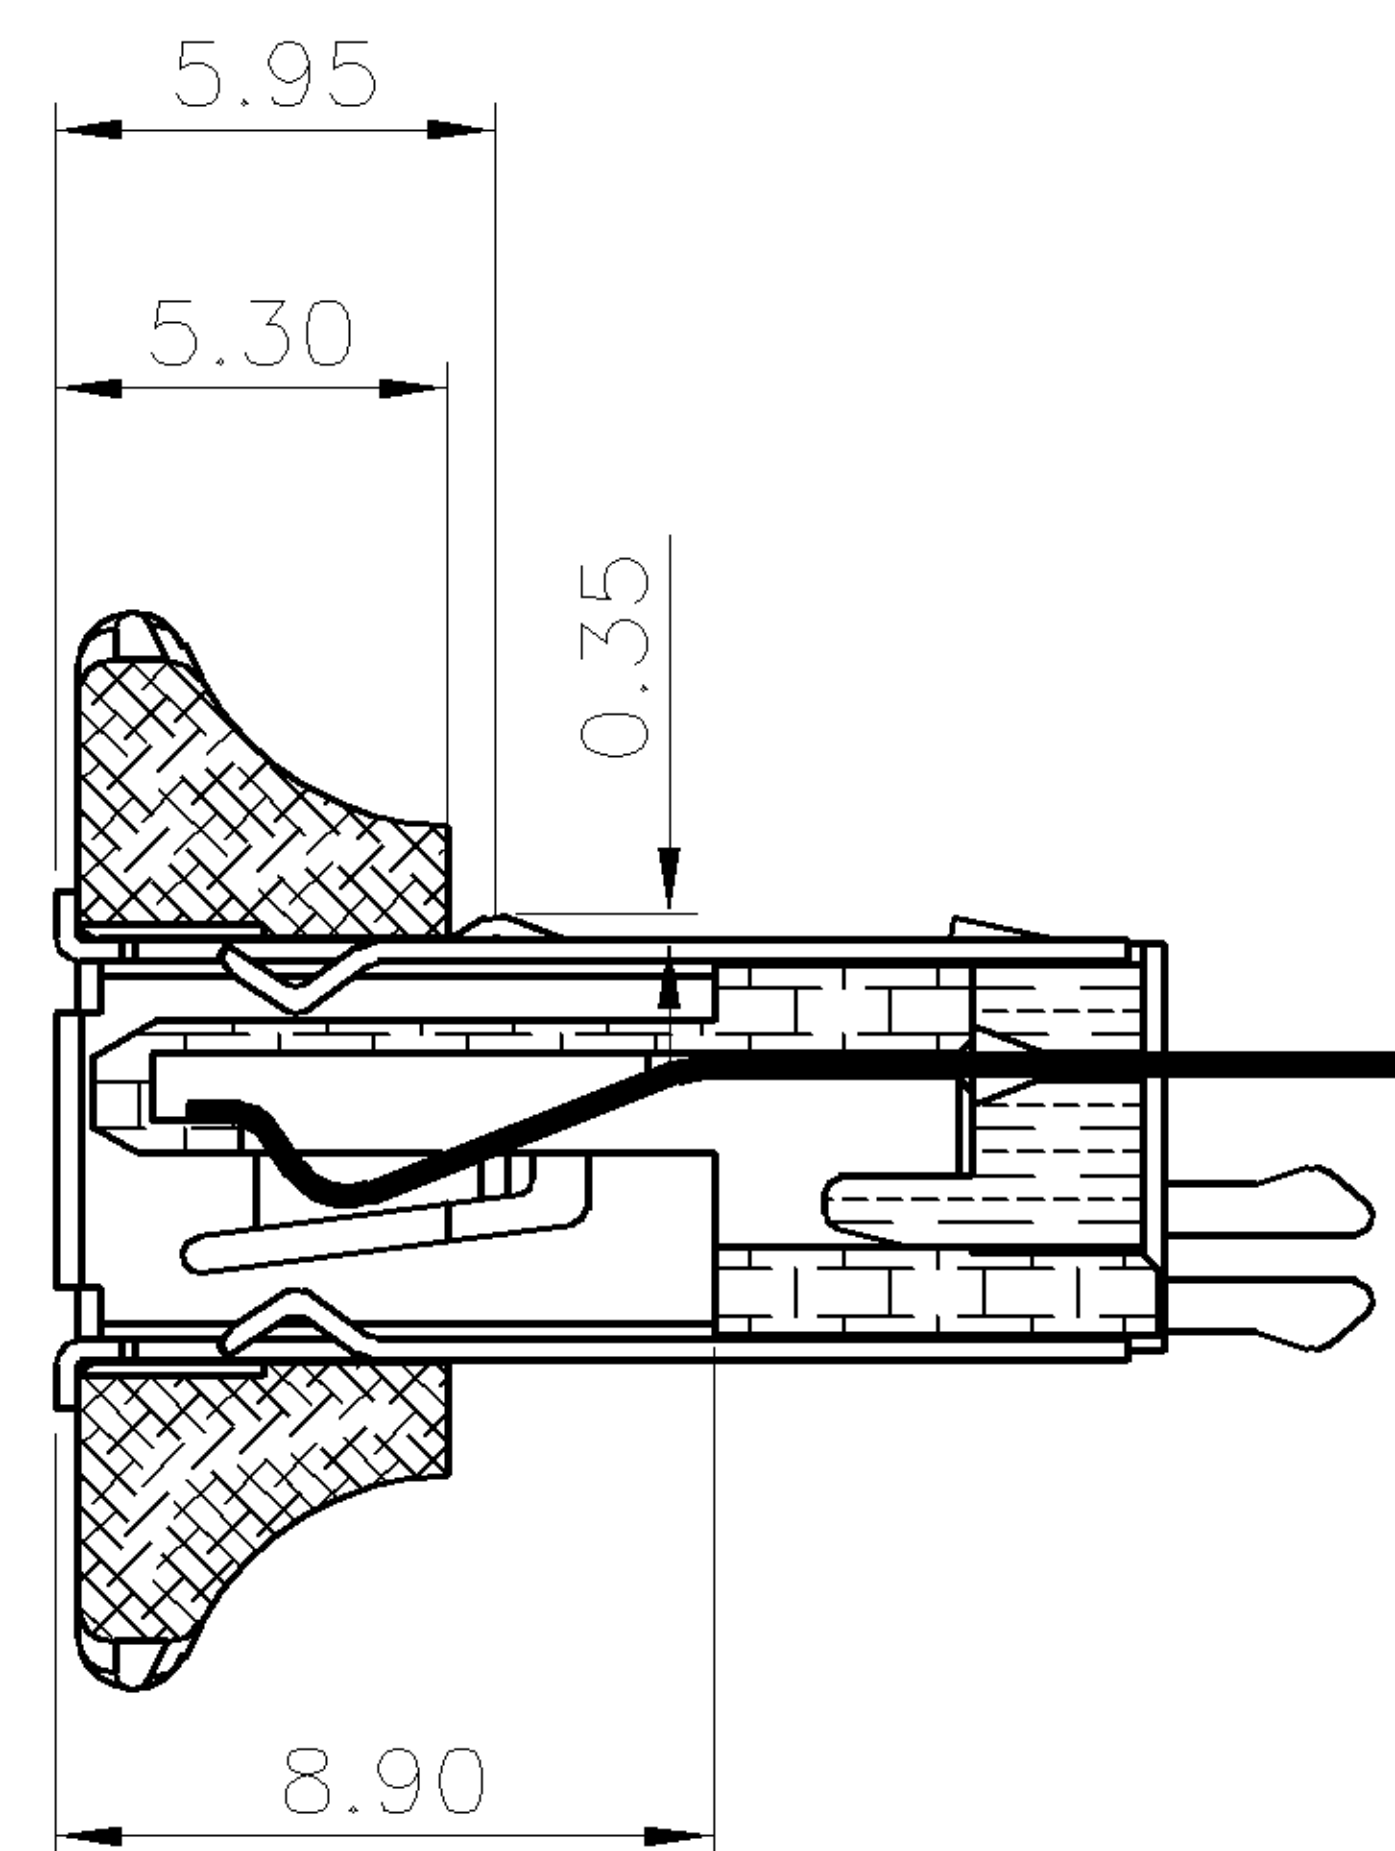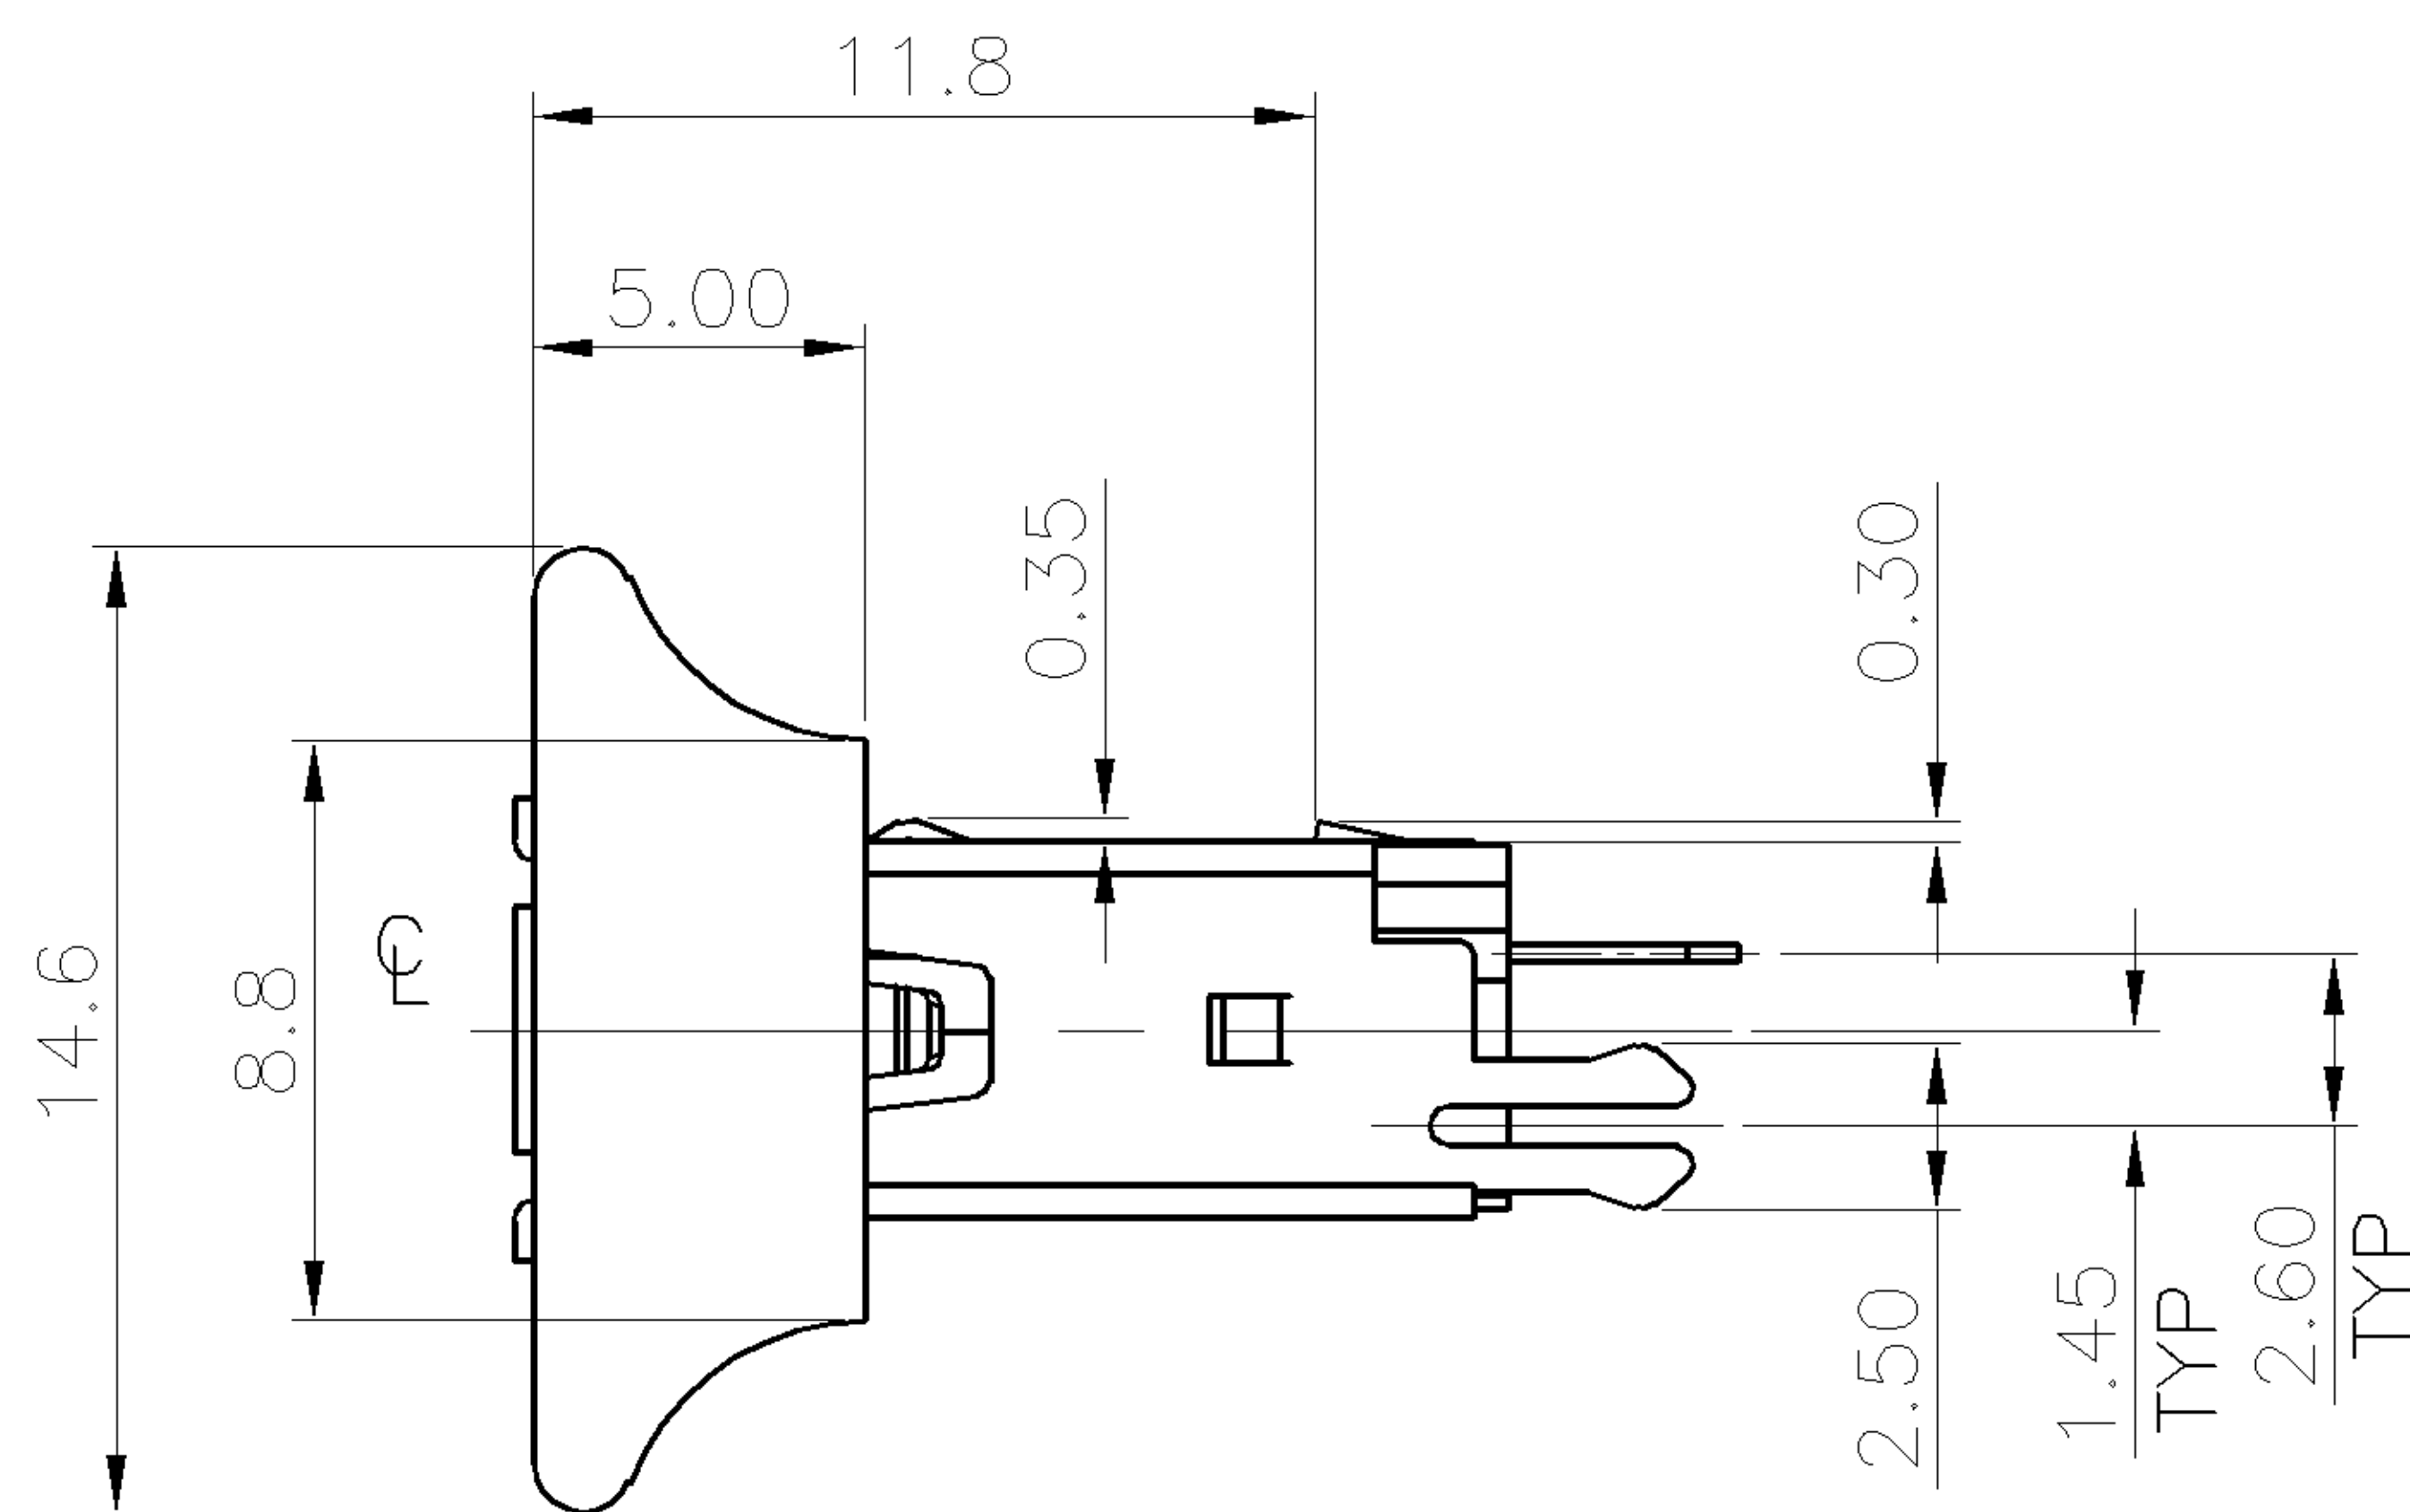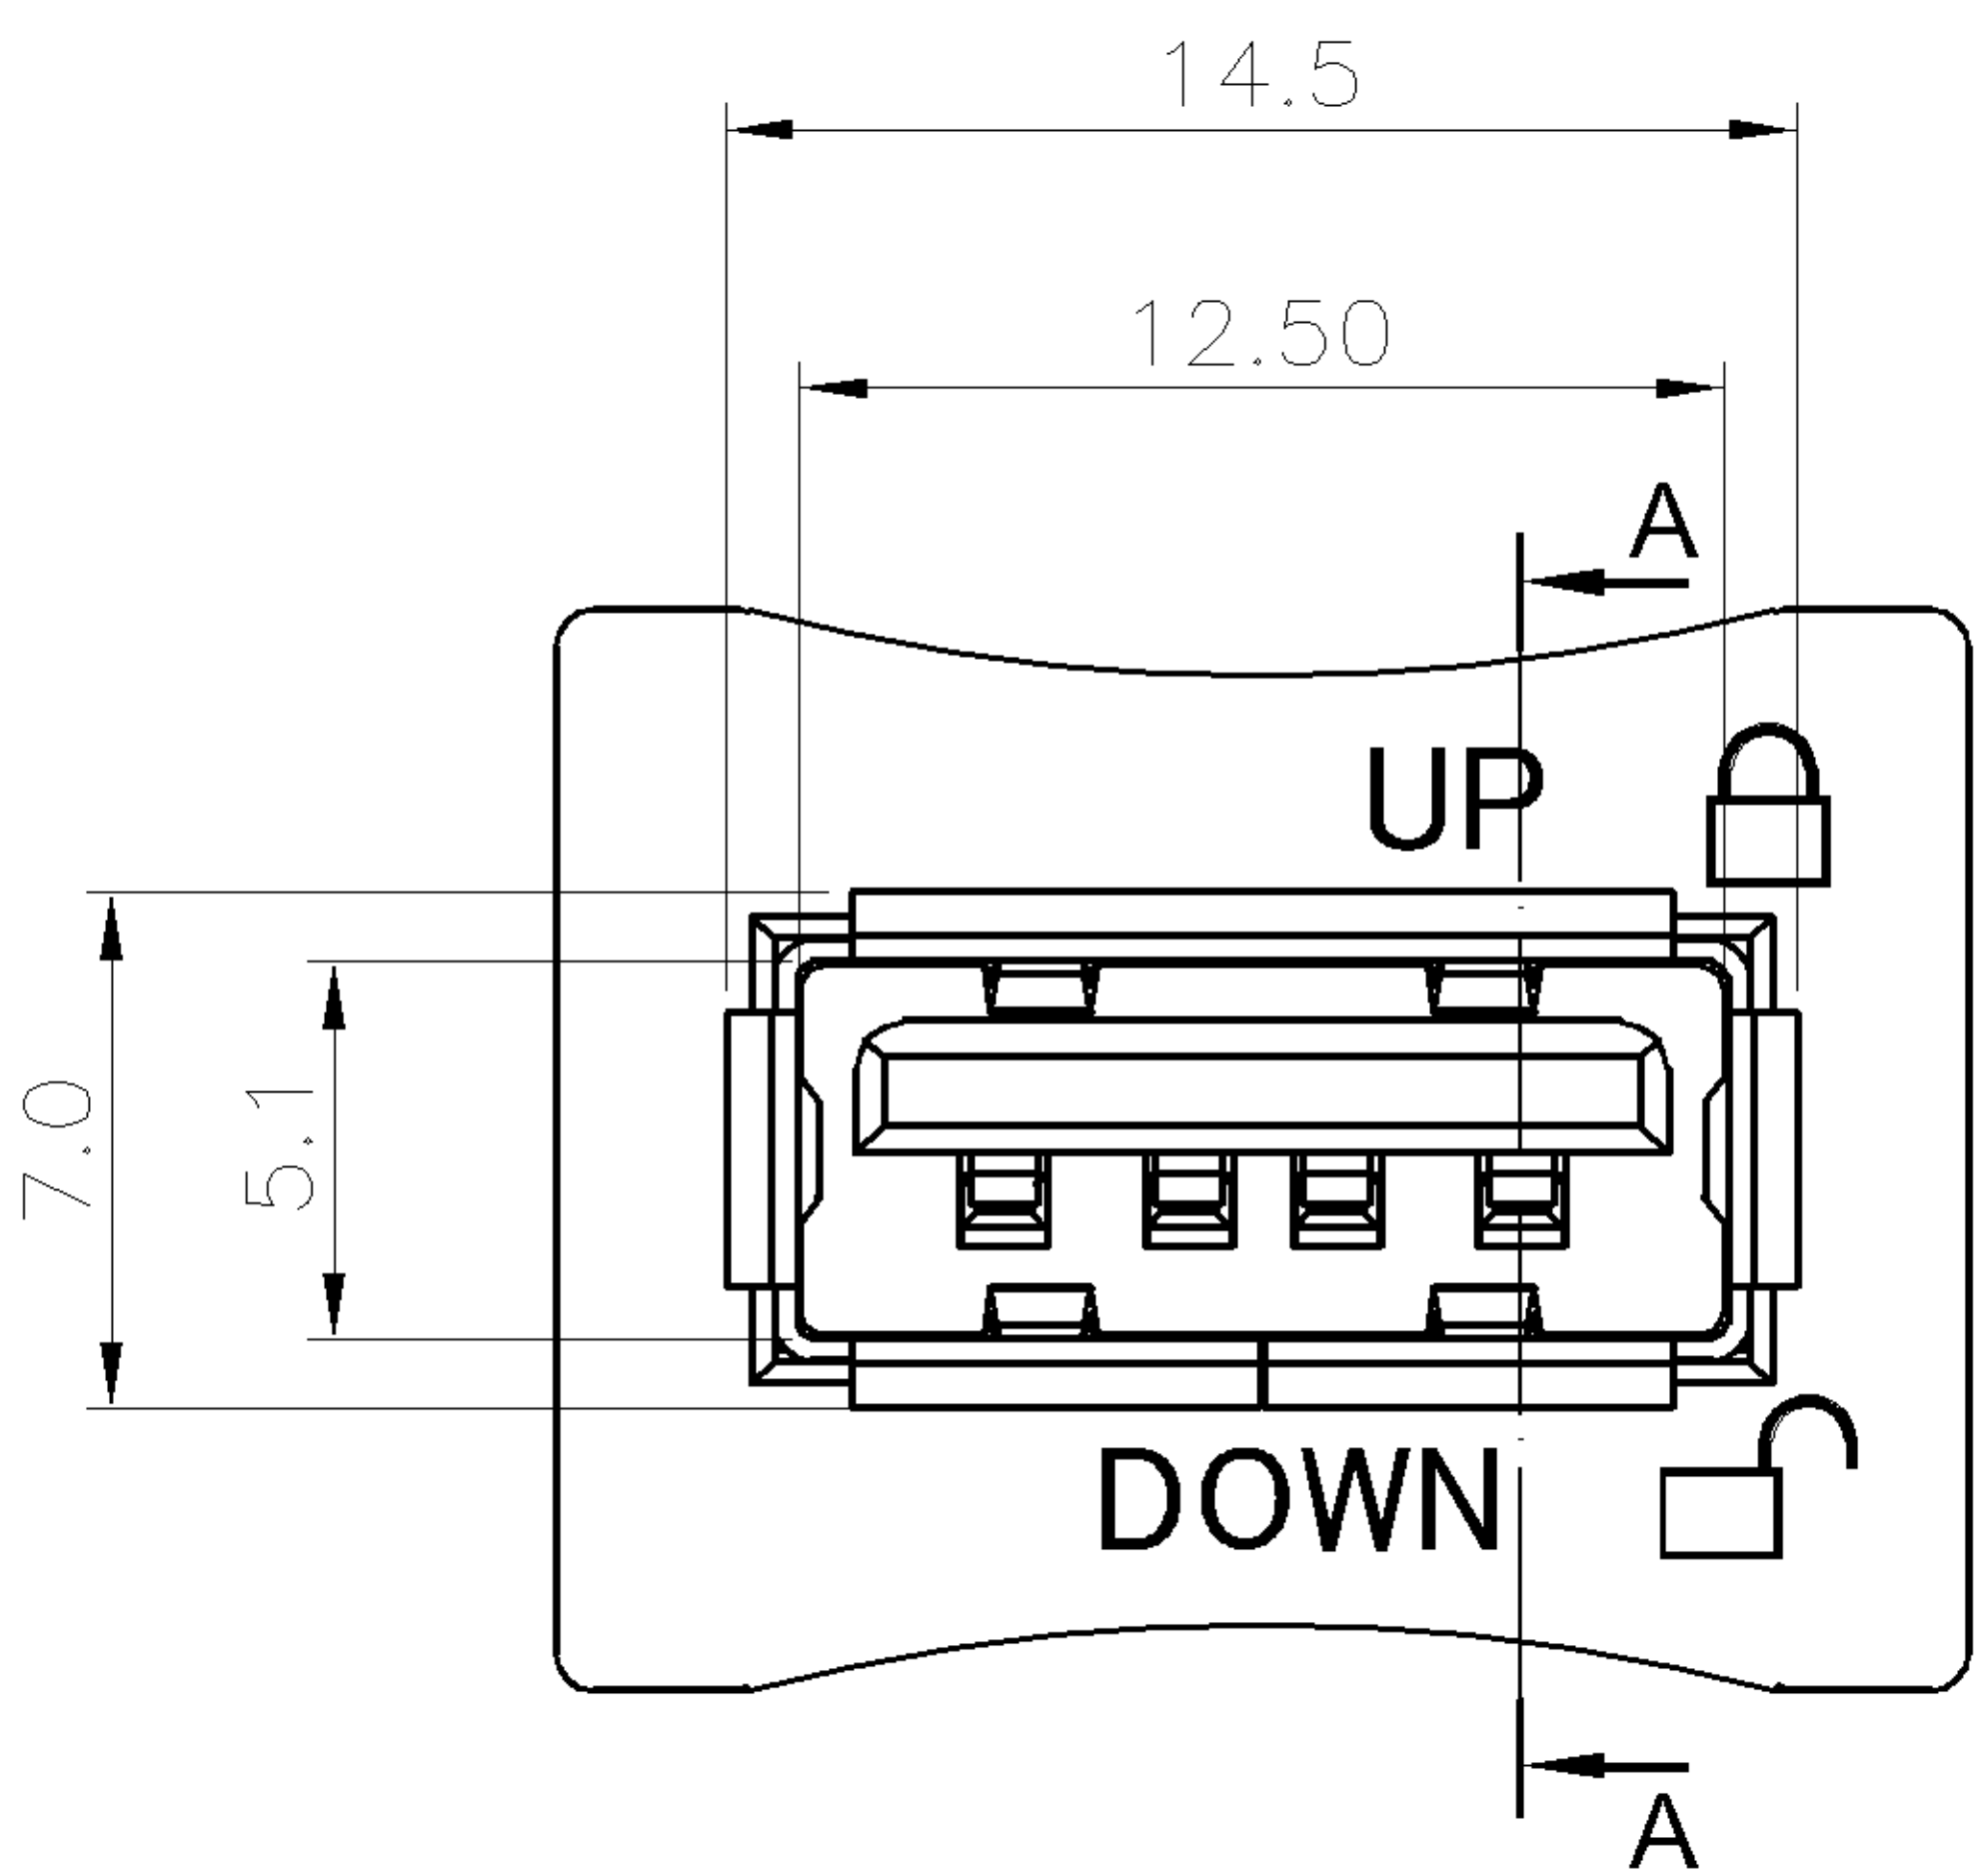

SECTION A-A

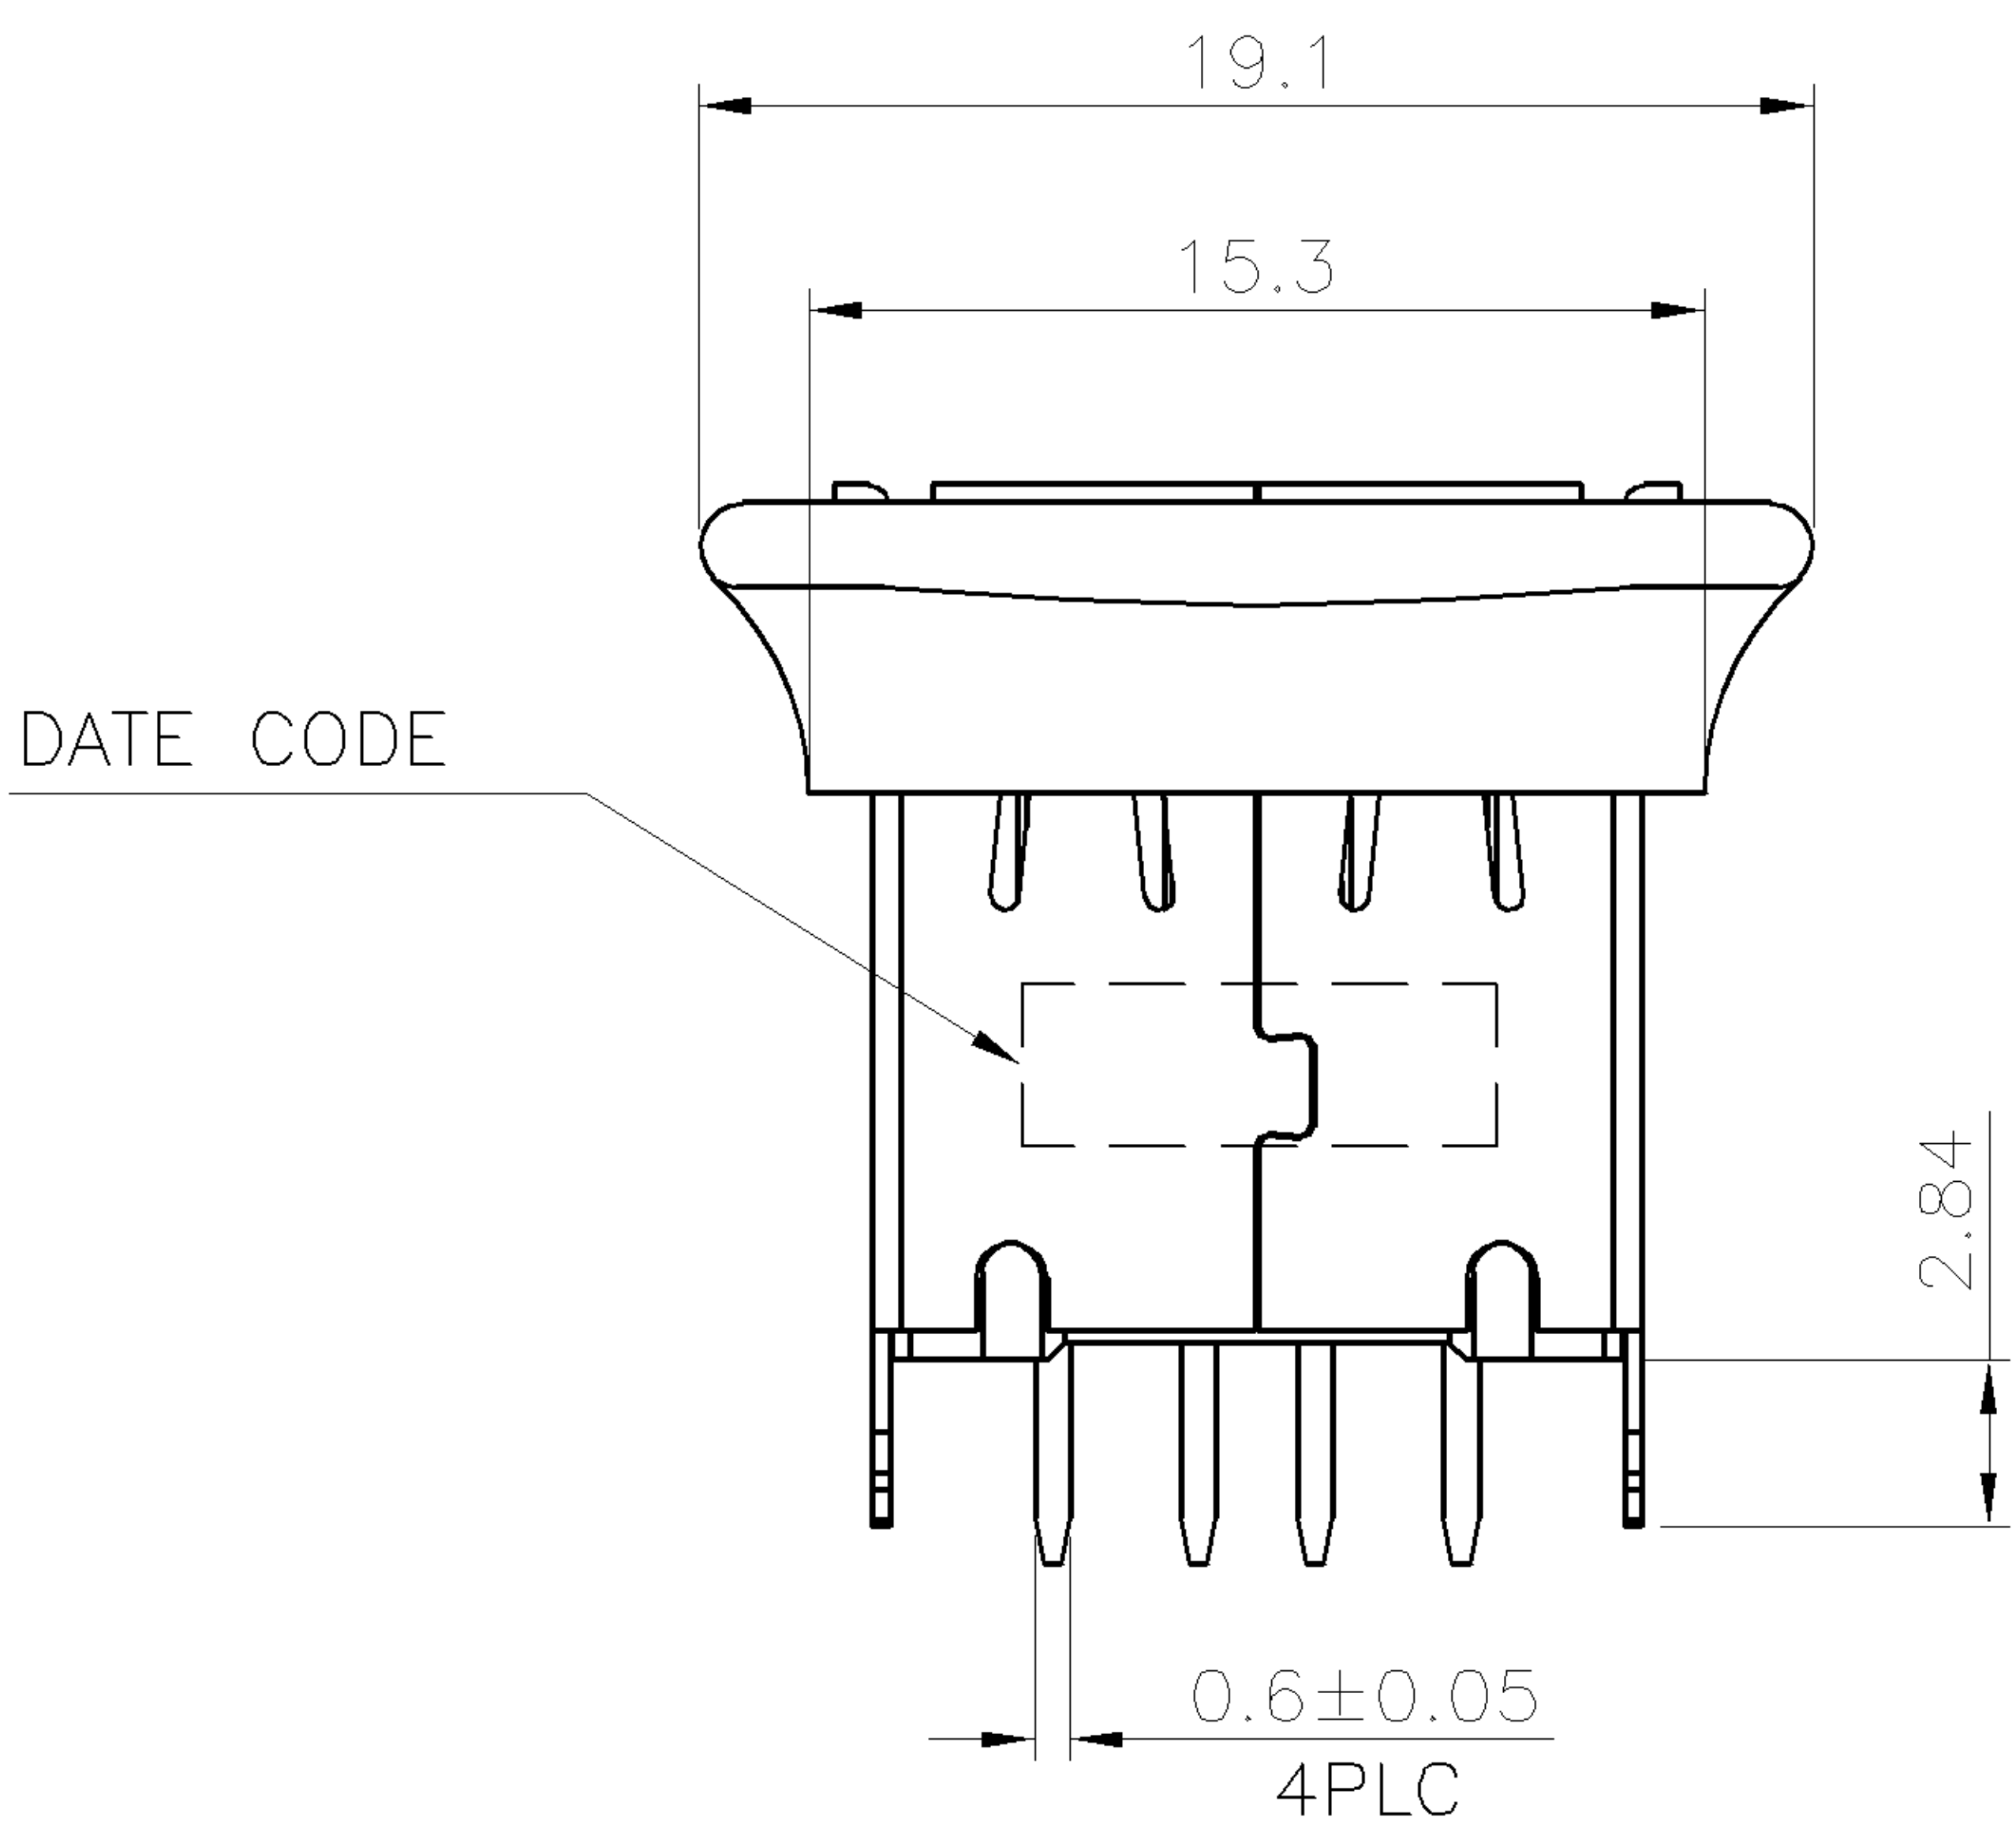




NOTES:

1. MATERIAL:
HOUSING: PA9T WITH 30% GF, UL94V-0, COLOR: BLACK.
LOCKING DEVICE: PA66 WITH 15% GF, UL94V-0, COLOR: BLUE(2718C).
CONTACTS: PHOSPHOR BRONZE, T=0.25mm.
SHELL: BRASS, T=0.30mm.
2. FINISH:
CONTACTS: GOLD (SEE TABLE) PLATED ON CONTACT AREA,
2.54um (100u") MIN. BRIGHT-TIN PLATING ON SOLDER TAILS,
1.27um (50u") MIN. NICKEL UNDERPLATED ALL OVER.
SHELL: 1.27um (50u") MIN. NICKEL PLATED.
3. RECOMMENDED PCB THICKNESS: 1.6mm.
4. WAVE SOLDER CAPABLE TO 265°C PER **TE CONNECTIVITY** TEST SPEC, 109-202.CONDTION B.


2.84	0.762um (30u")	1-1775690-2
	G/F	1-1775690-1
3.50	0.762um (30u")	1775690-2
	G/F	1775690-1
DIM A	MIN. GOLD	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. HUANG 19JUL2007	TE Connectivity			
		CHK S. HOU 19JUL2007				
		APVD W.J. KE 19JUL2007	NAME			
DIMENSIONS: MM		PRODUCT SPEC 108-57519	USB A TYPE, W/LOCKING VERTICAL, DIP			
		QUALIFICATION TEST REPORT 501-57772				
		WEIGHT 2.9 GRAMS	SIZE A3	CAGE CODE 00779	DRAWING NO C=1775690	RESTRICTED TO —
MATERIAL SEE NOTE		FINISH SEE NOTE	CUSTOMER DRAWING		SCALE —	SHEET 1 OF 2
					REV A1	

LOC	DIST	REVISIONS					
DW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

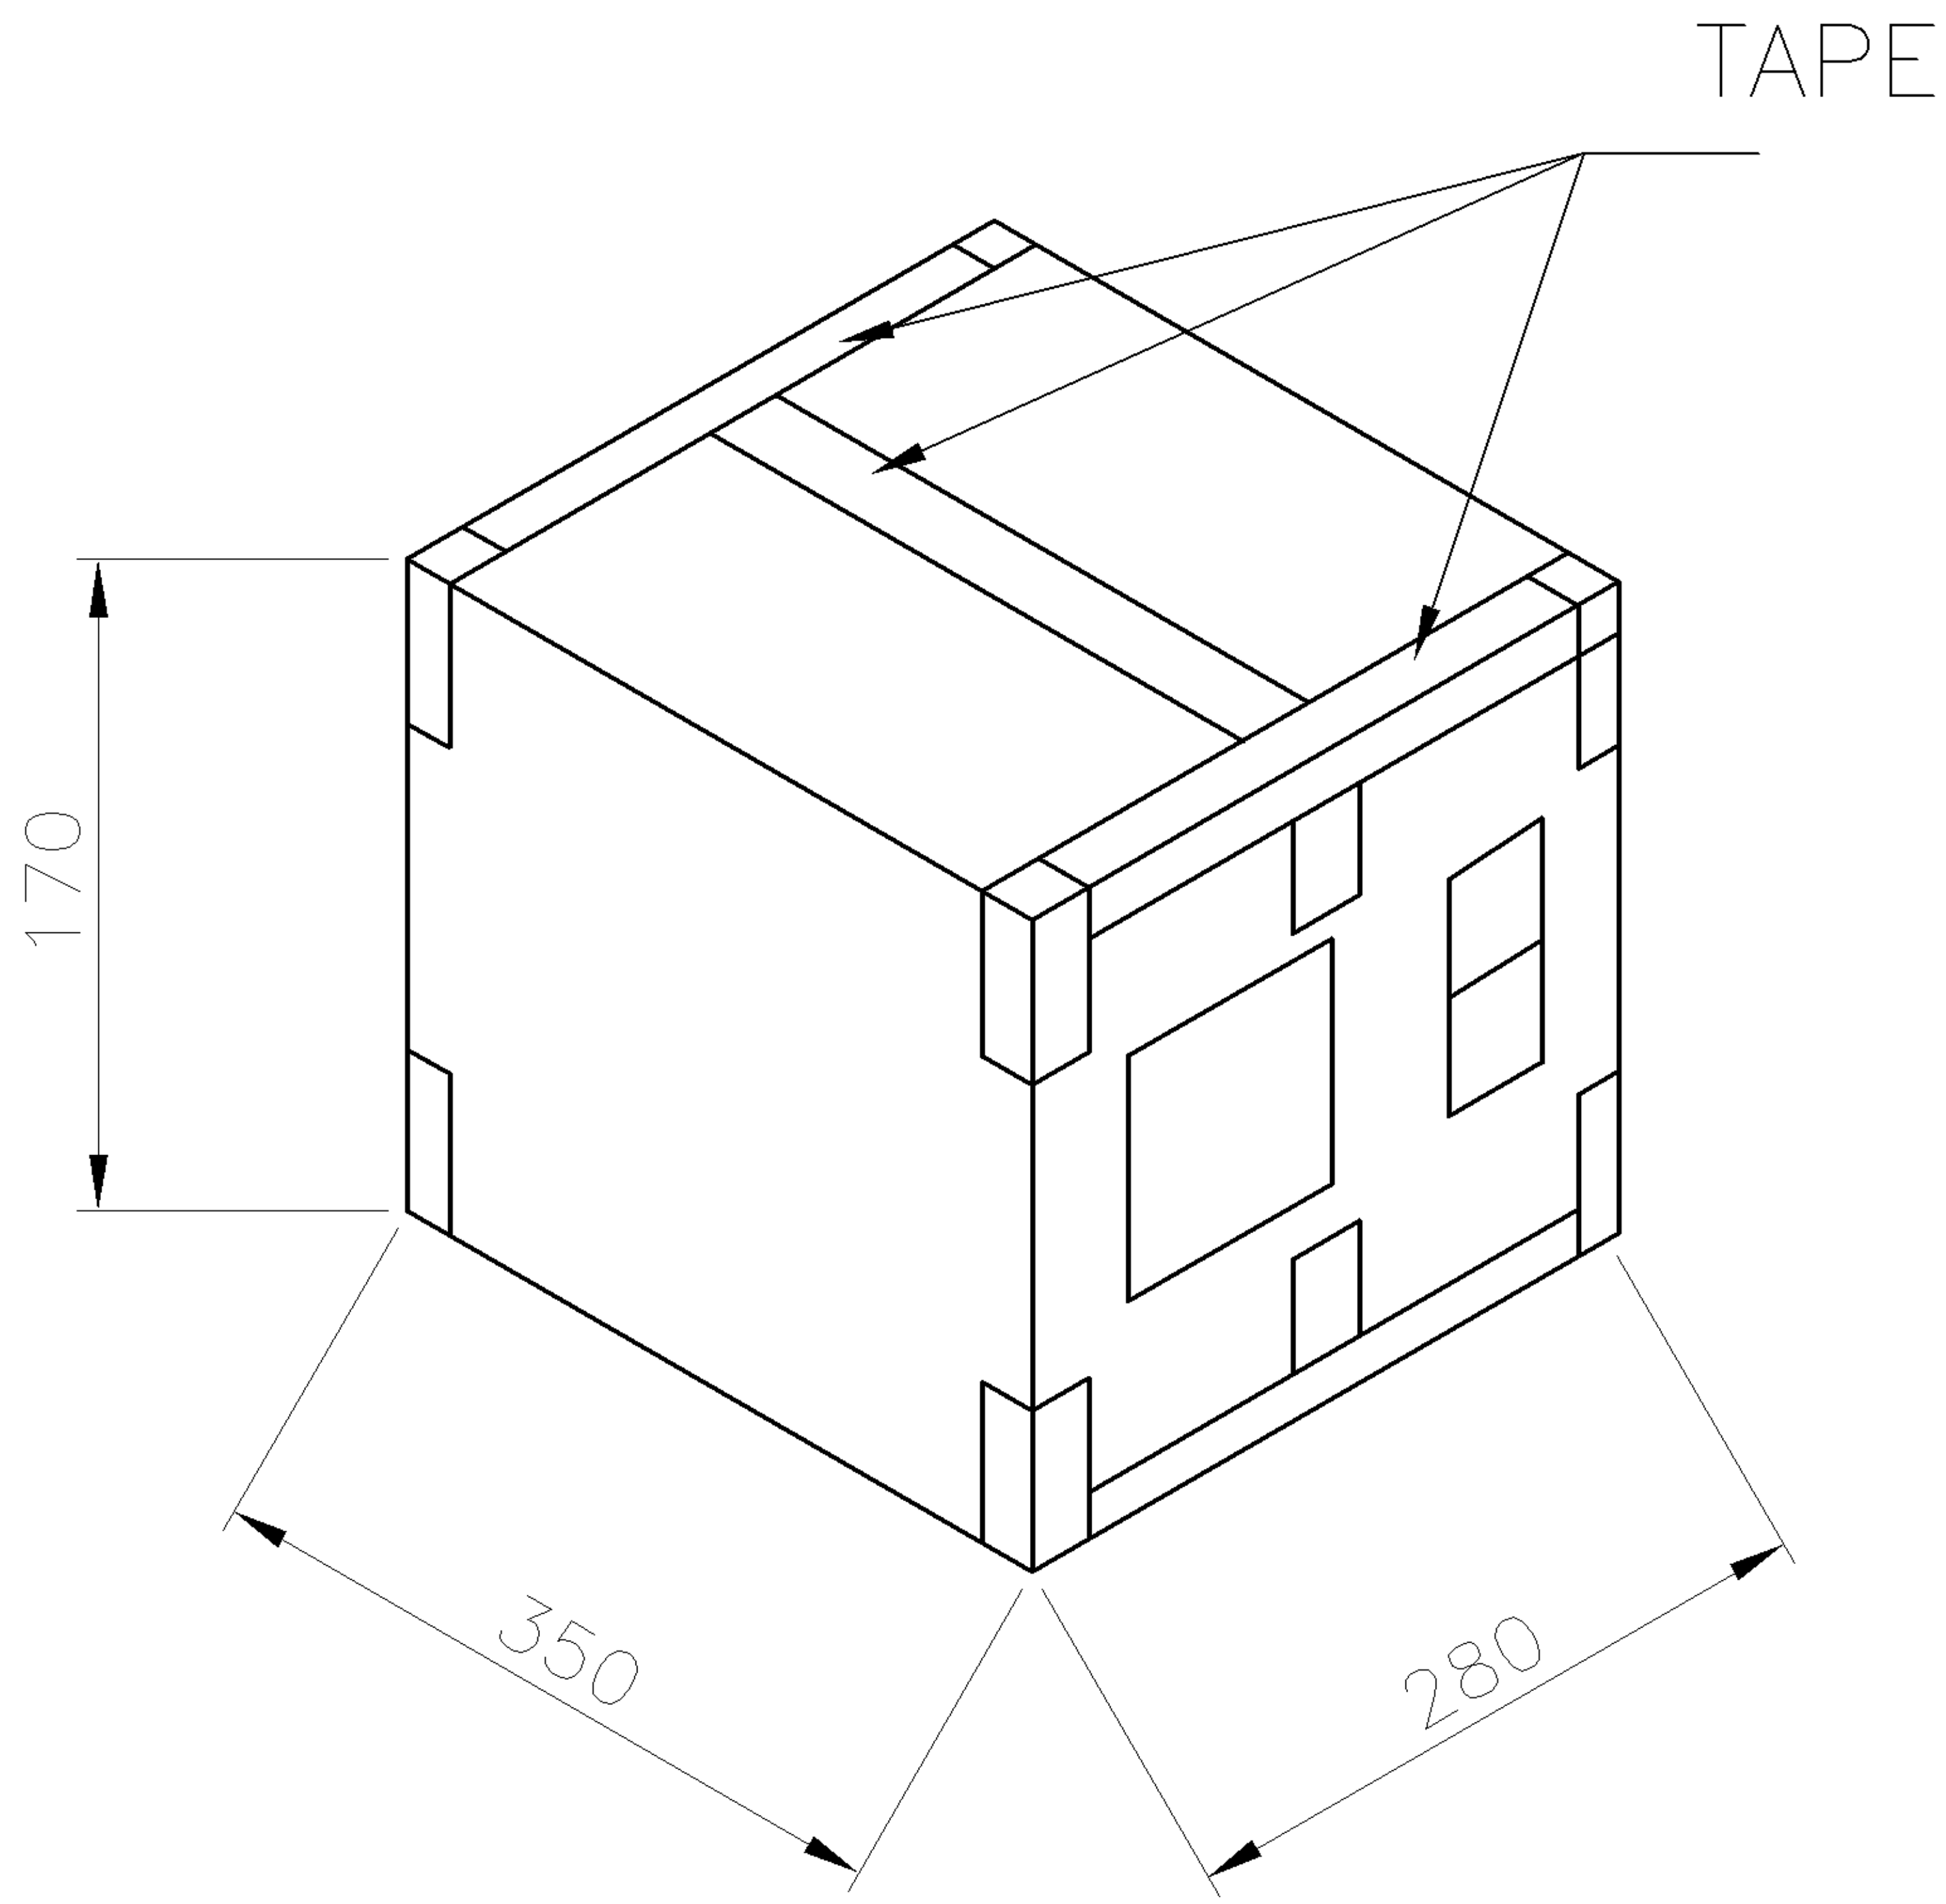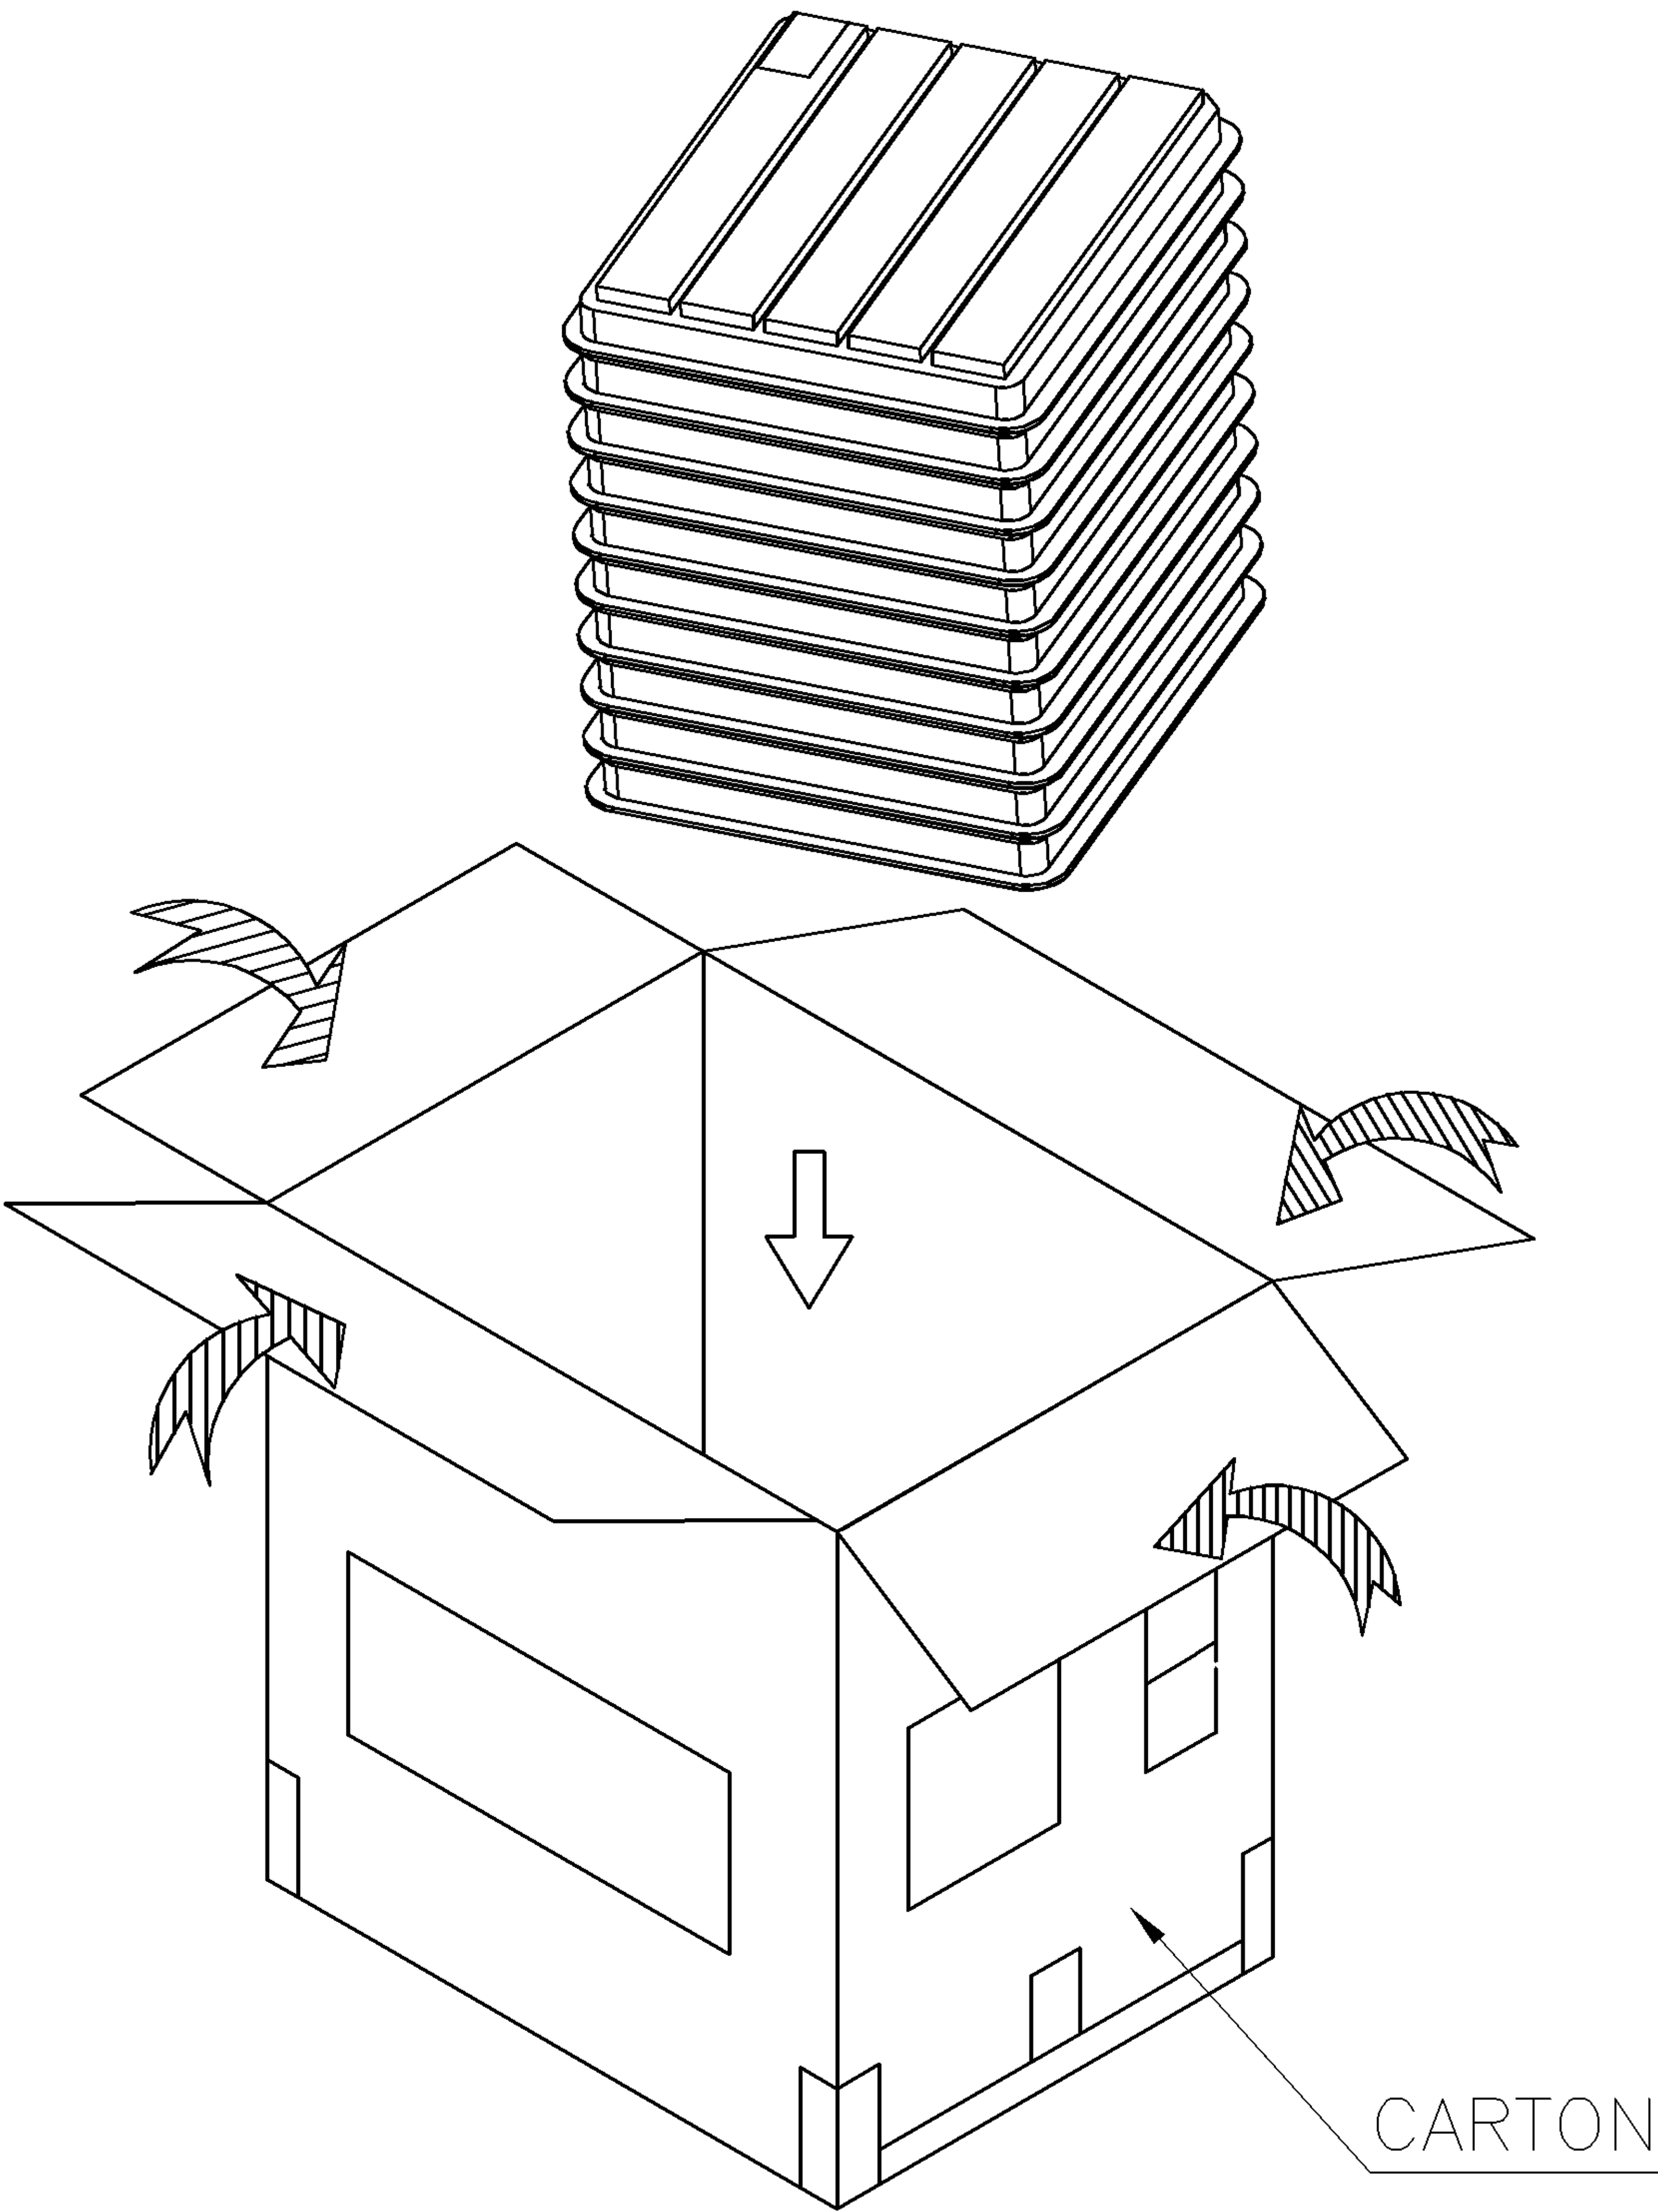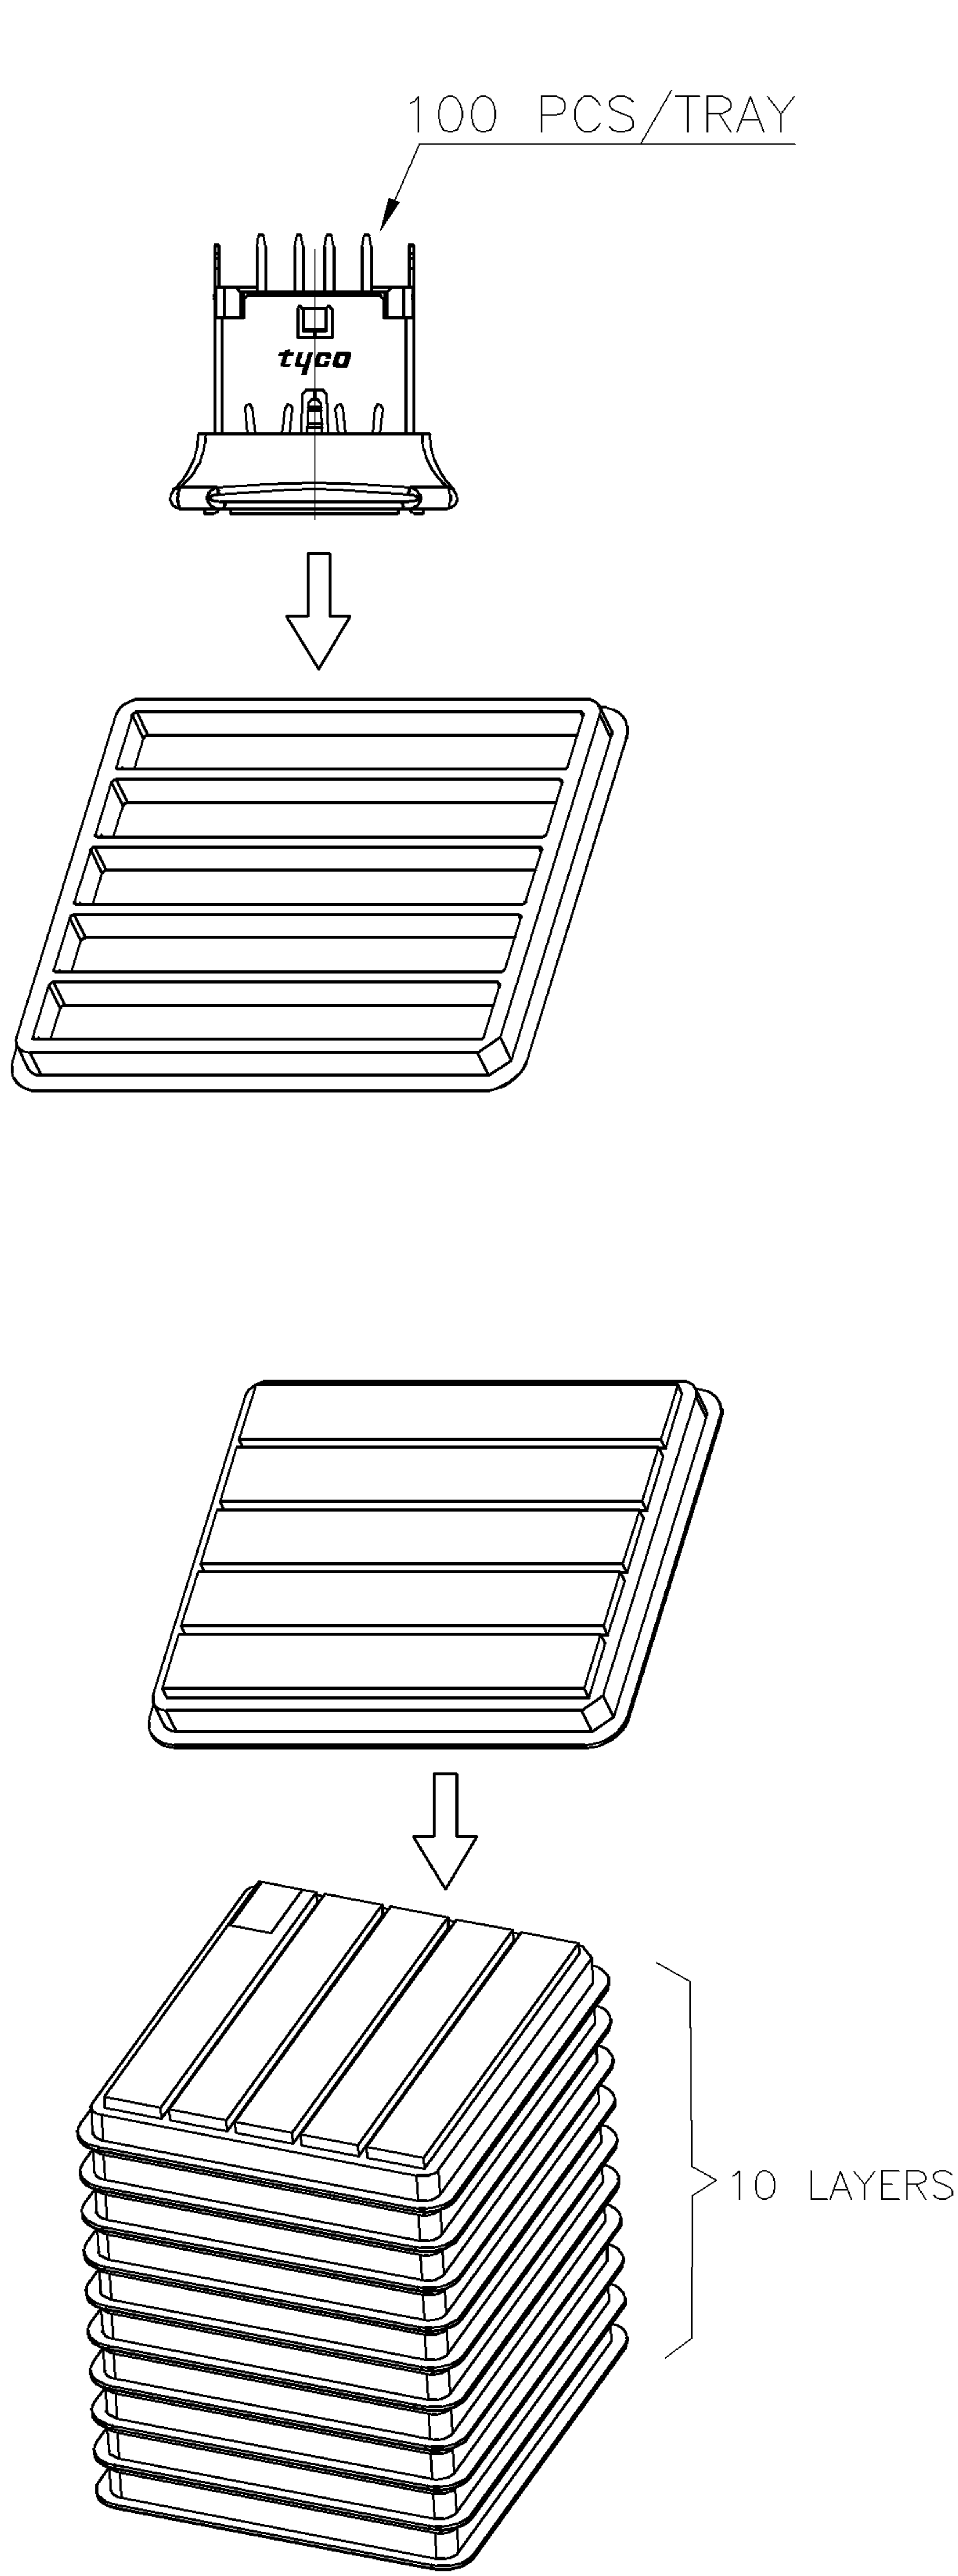

100	10	1000	3.9	2.9
PCS/ TRAY	TRAY/ CARTON	QUANTITY	G/W (KG)	N/W (KG)

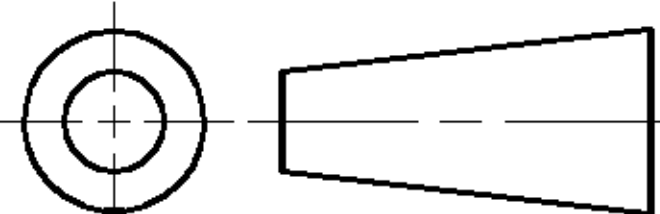THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. HUANG 19JUL2007		 TE Connectivity			
		CHK S. HOU 19JUL2007					
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		APVD W.J. KE 19JUL2007		USB A TYPE, W/LOCKING VERTICAL, DIP			
		PRODUCT SPEC					
		—					
		APPLICATION SPEC					
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
—		—		A3	00779	C=1775690	—
CUSTOMER DRAWING				SCALE	SHEET	REV	
—				—	2 OF 2	A1	

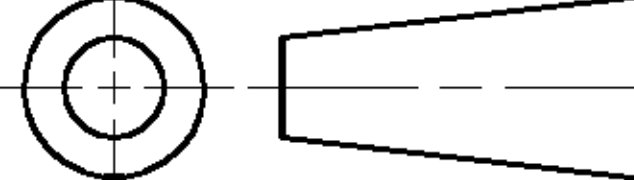DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH
MATERIAL	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9