



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		1	INITIAL RELEASE	26FEB2019	JW	SH

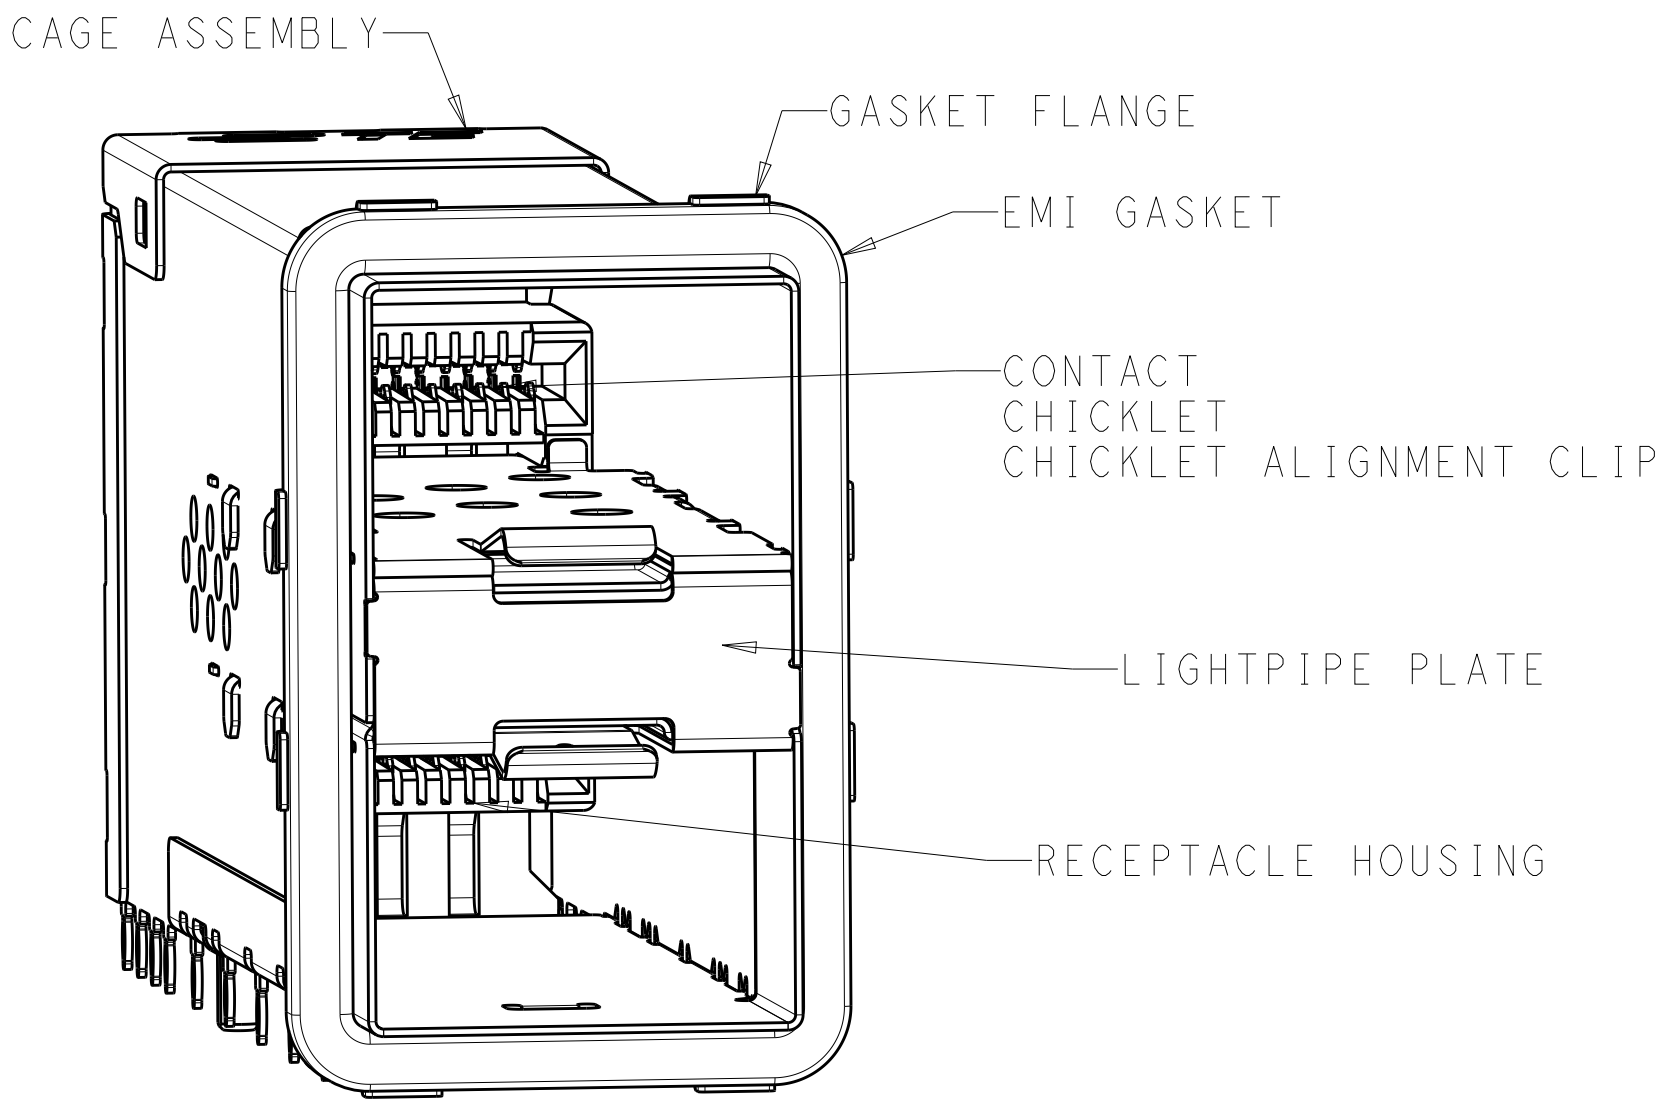

2349202-1
SCALE 4:1

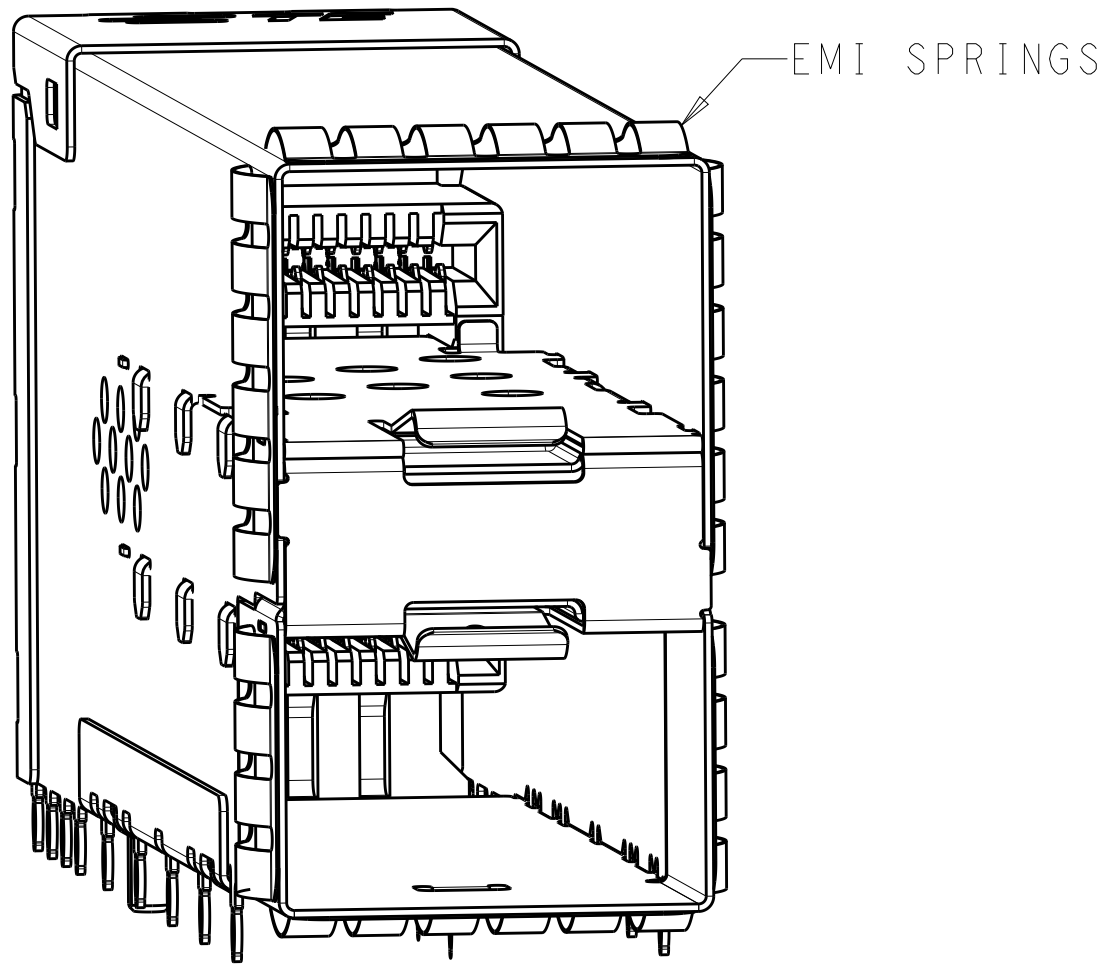

2349202-5
SCALE 4:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - LCP, BLACK, UL 94V-O RATED
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE PLATE- STAINLESS STEEL

2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE


3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319


5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm

6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY


7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN

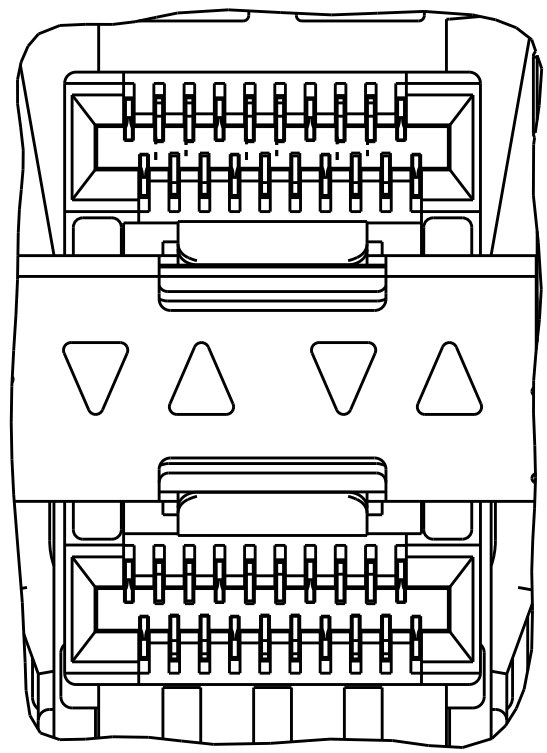


INNER/OUTER LIGHT PIPES
2349202-2, 2349202-6
SCALE 5:1

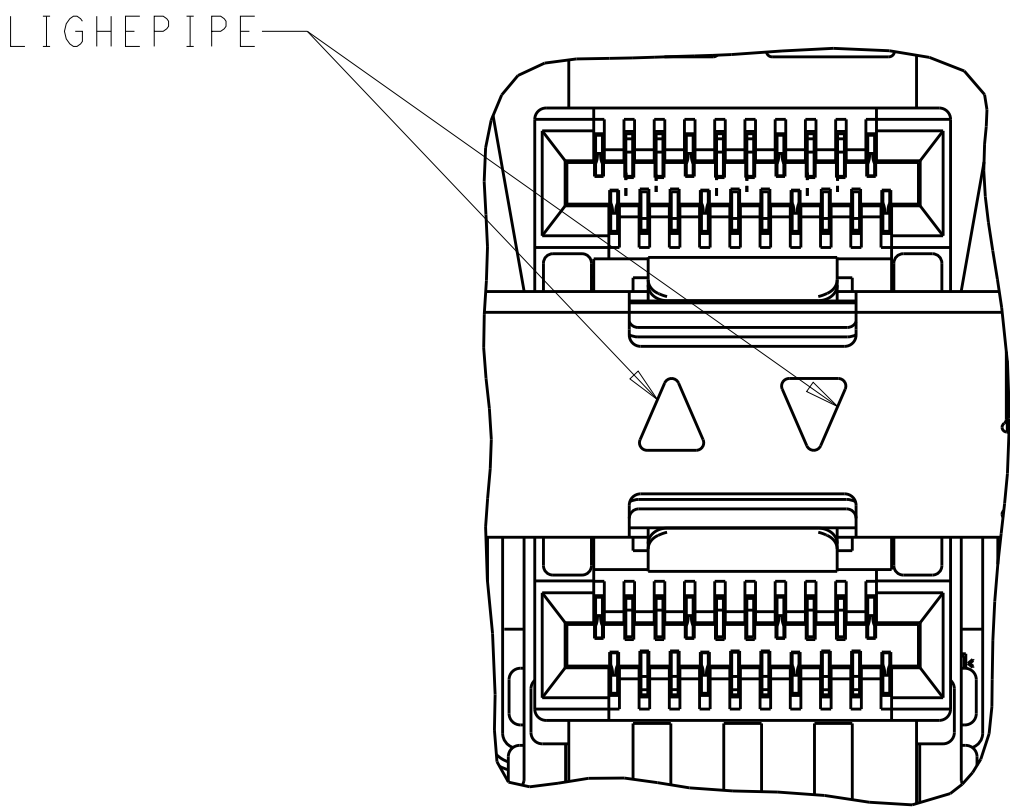


INNER LIGHT PIPES
2349202-3, 2349202-7
SCALE 5:1

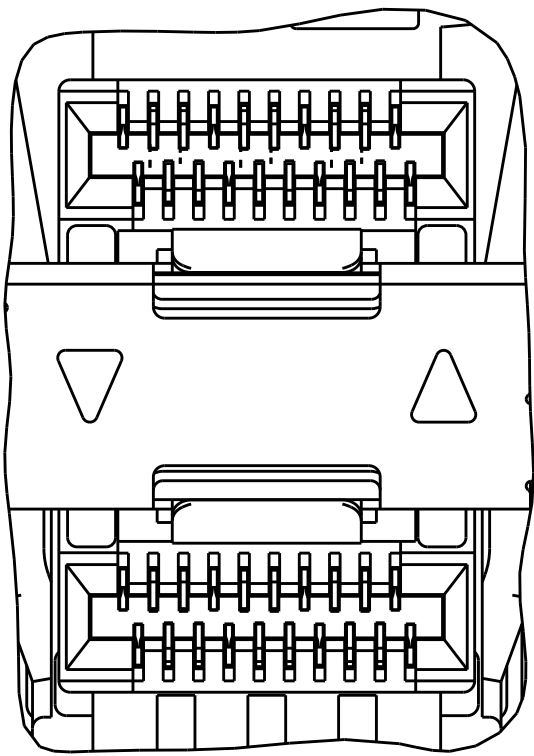

OUTER LIGHT PIPES
2349202-4, 2349202-8
SCALE 5:1

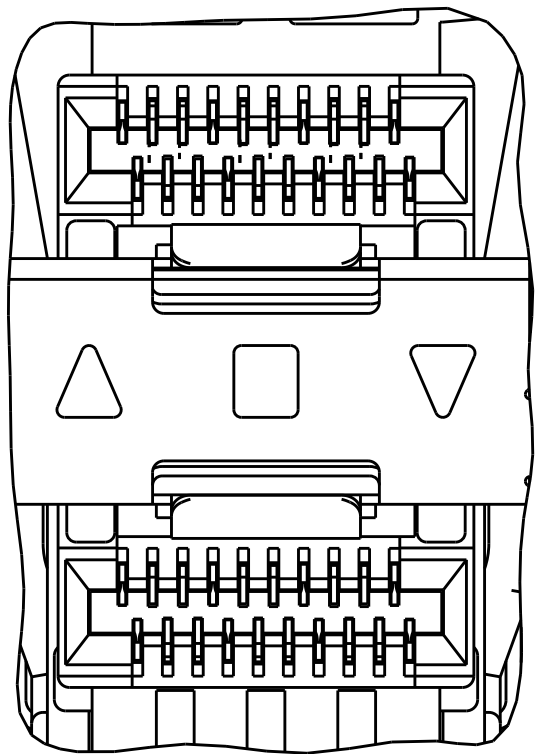

CENTER/REVERSED OUTER LIGHT PIPES
1-2349202-7, 1-2349202-9
SCALE 5:1

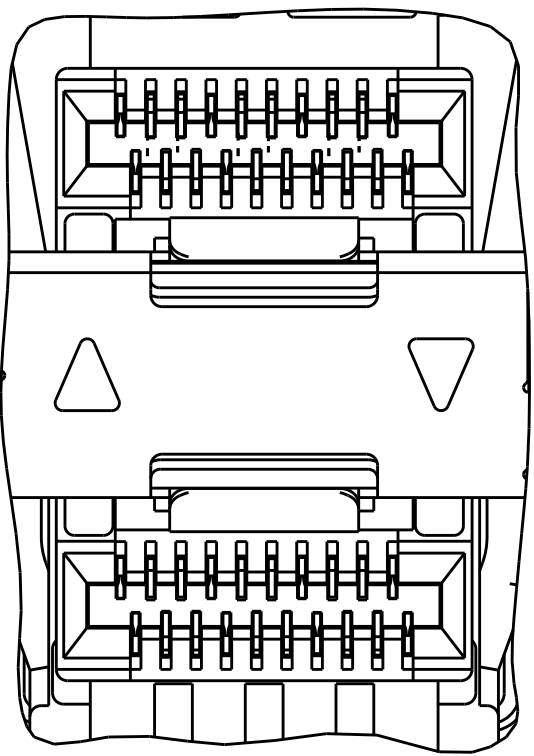

REVERSED OUTER LIGHT PIPES
1-2349202-8, 2-2349202-0
SCALE 5:1

16.75	EMI SPRINGS	REVERSED OUTER	2-2349202-0
		CENTER/REVERSED OUTER	1-2349202-9
19.5	EMI GASKET	REVERSED OUTER	1-2349202-8
		CENTER/REVERSED OUTER	1-2349202-7
16.75	EMI SPRINGS	OUTER	2349202-8
		INNER	2349202-7
		INNER/OUTER	2349202-6
		NONE	2349202-5
19.5	EMI GASKET	OUTER	2349202-4
		INNER	2349202-3
		INNER/OUTER	2349202-2
		NONE	2349202-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG CHK S. HAN APVD S. HAN	26FEB2019 26FEB2019 26FEB2019	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56	
		0 PLC	±0.25	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		1 PLC	±0.25	108-2481	
		2 PLC	±0.25	APPLICATION SPEC	
		3 PLC	±0.25	114-13319	
MATERIAL SEE NOTES		FINISH SEE NOTES	WEIGHT -	A100779C=2349202	SCALE 4:1
		CUSTOMER DRAWING		SHEET 1 OF 4	



LOC		DIST		REVISONS			
GP		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

D





C

B

A

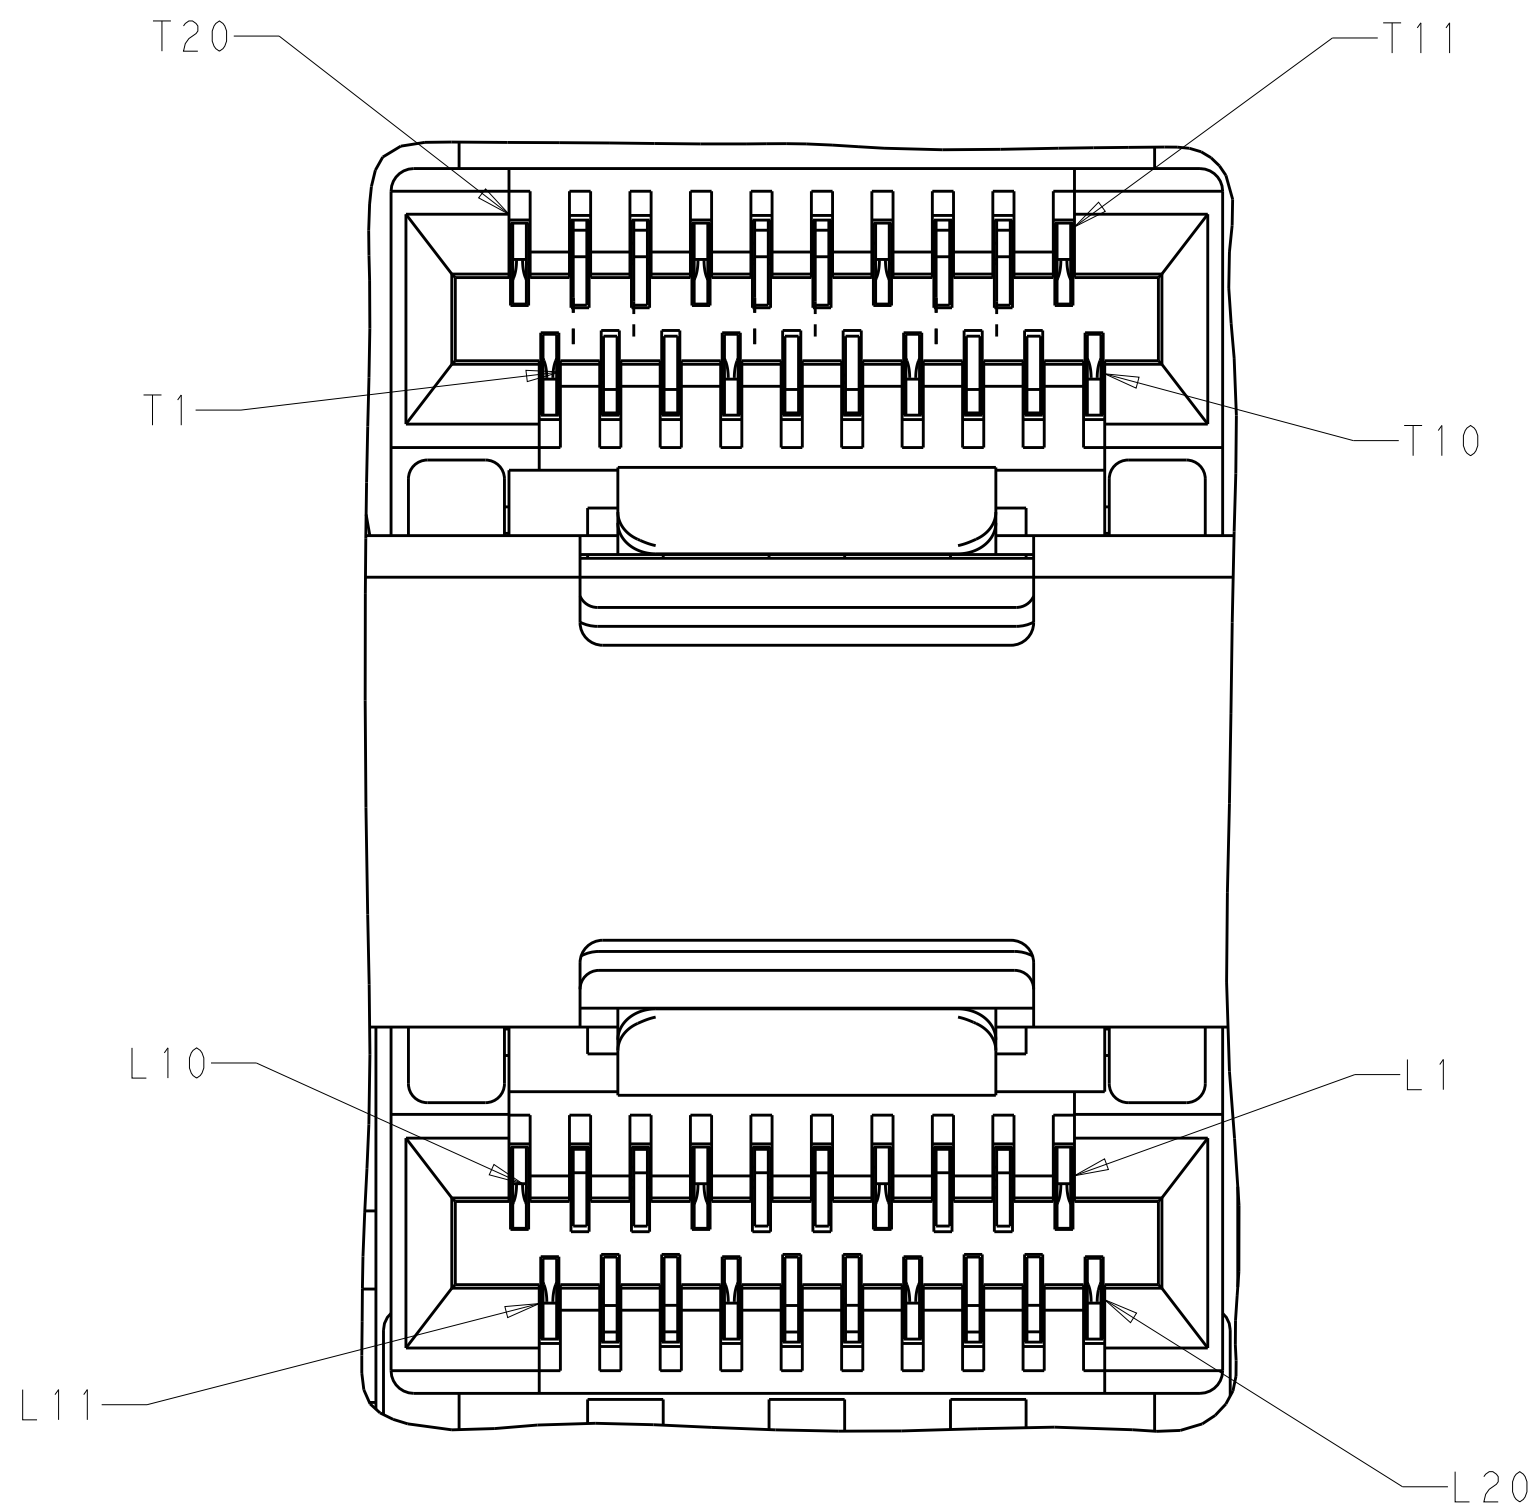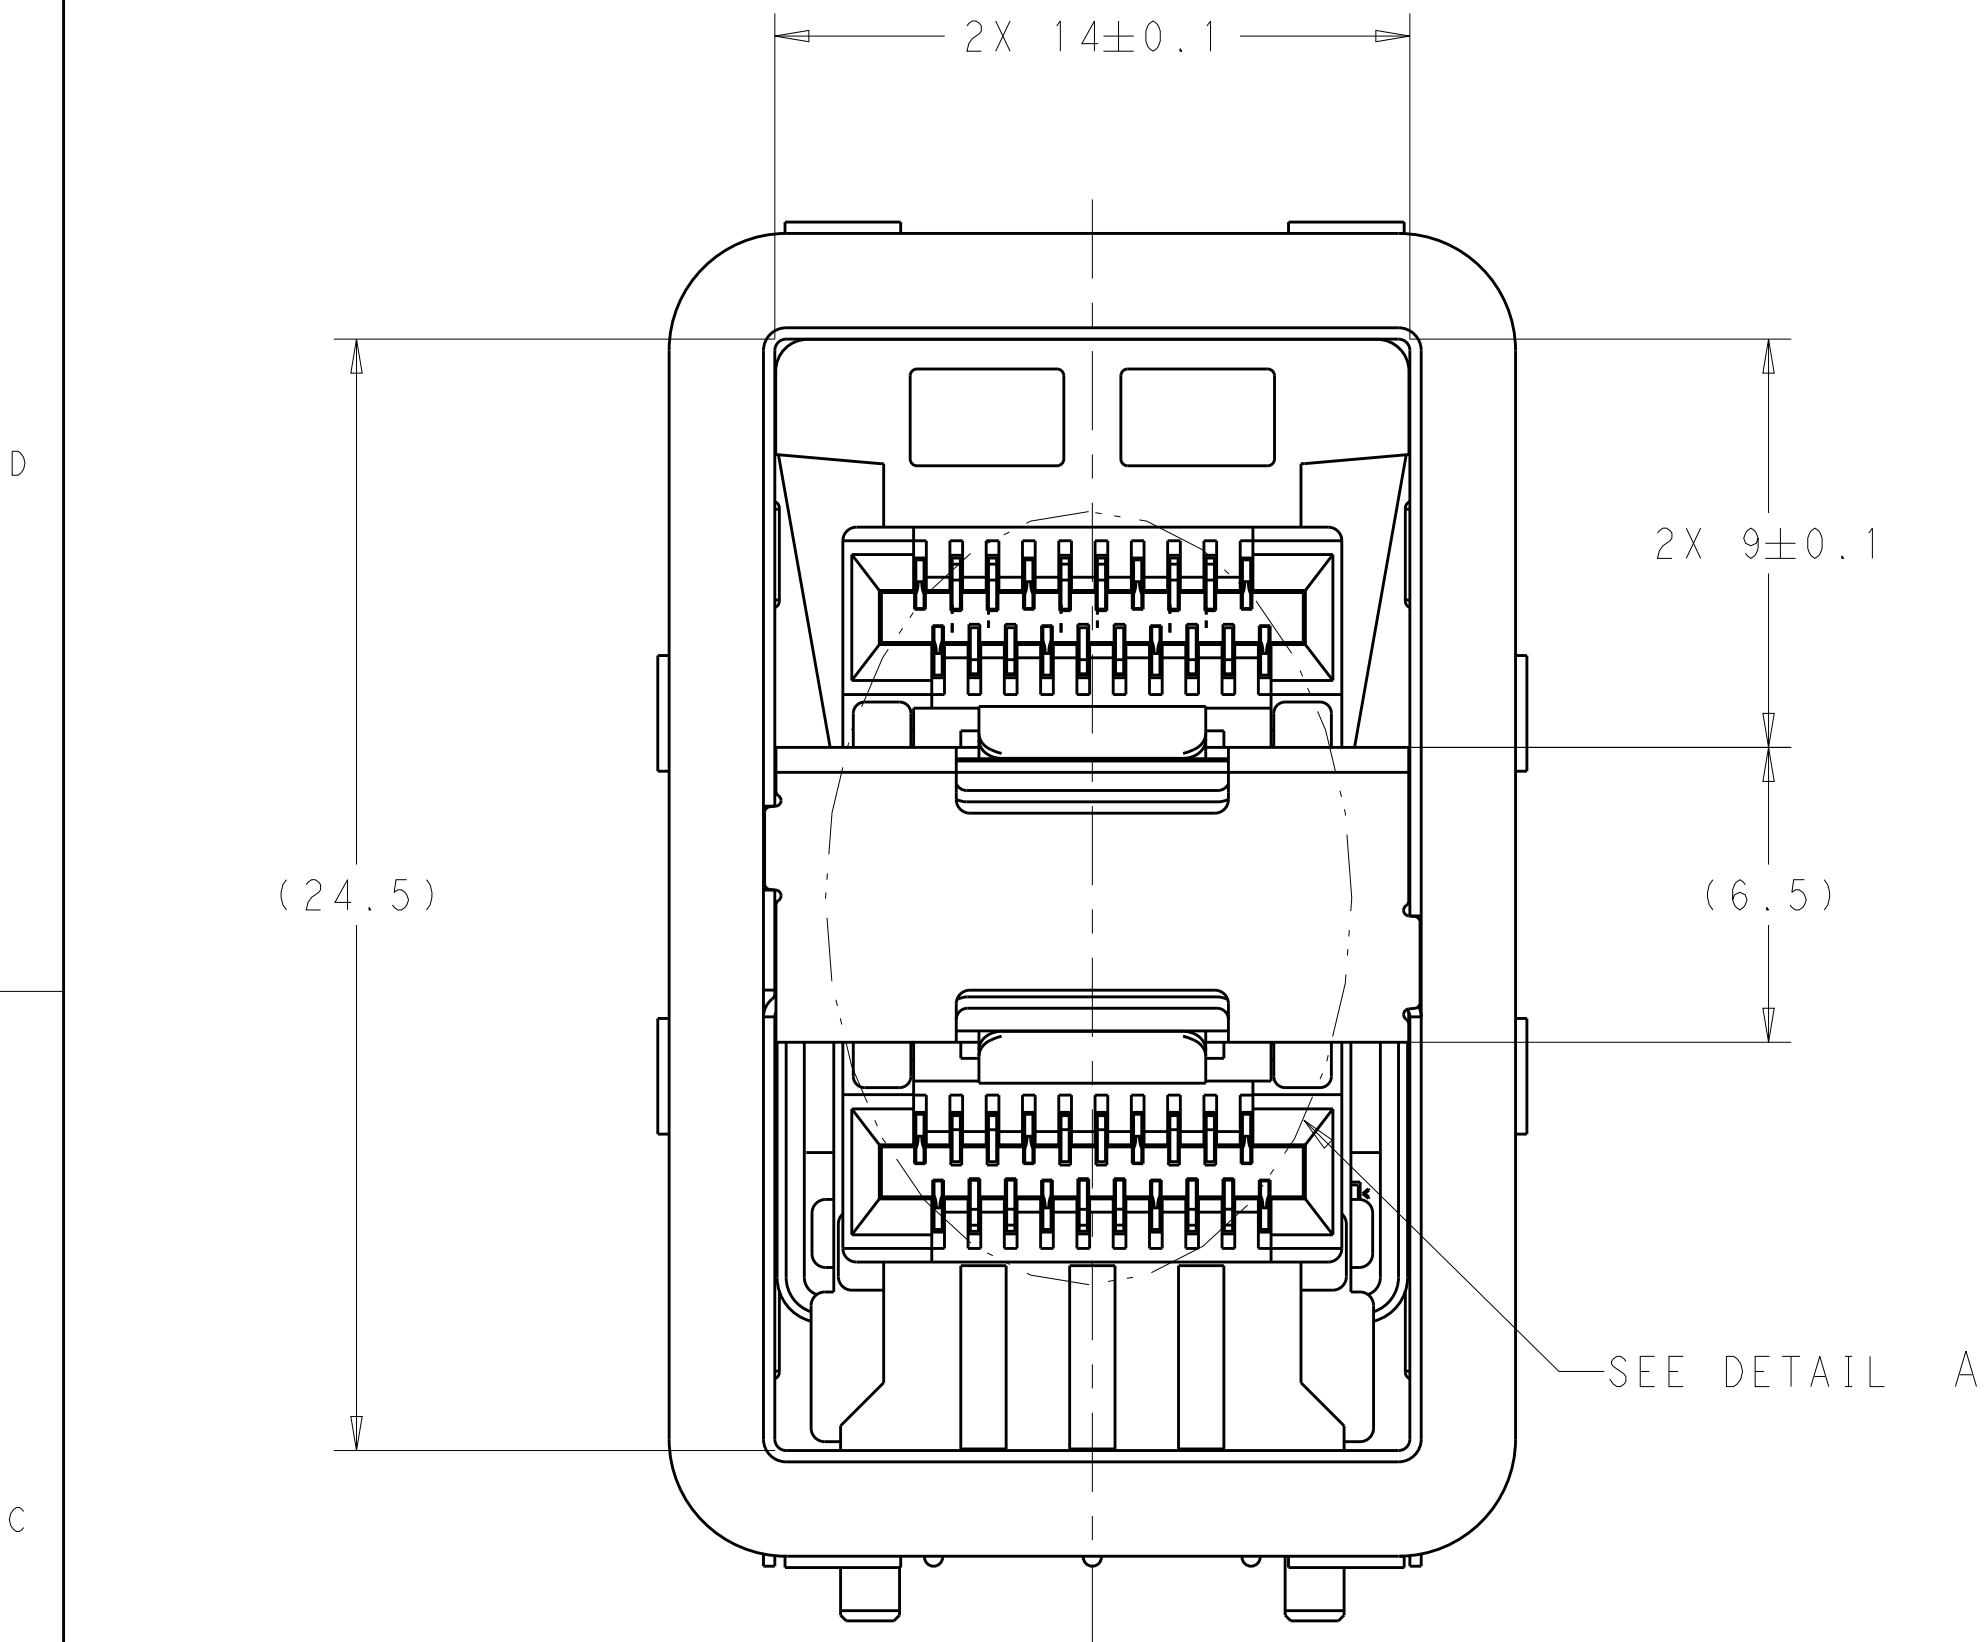


DETAIL A
2 PLACES
SCALE 10:1

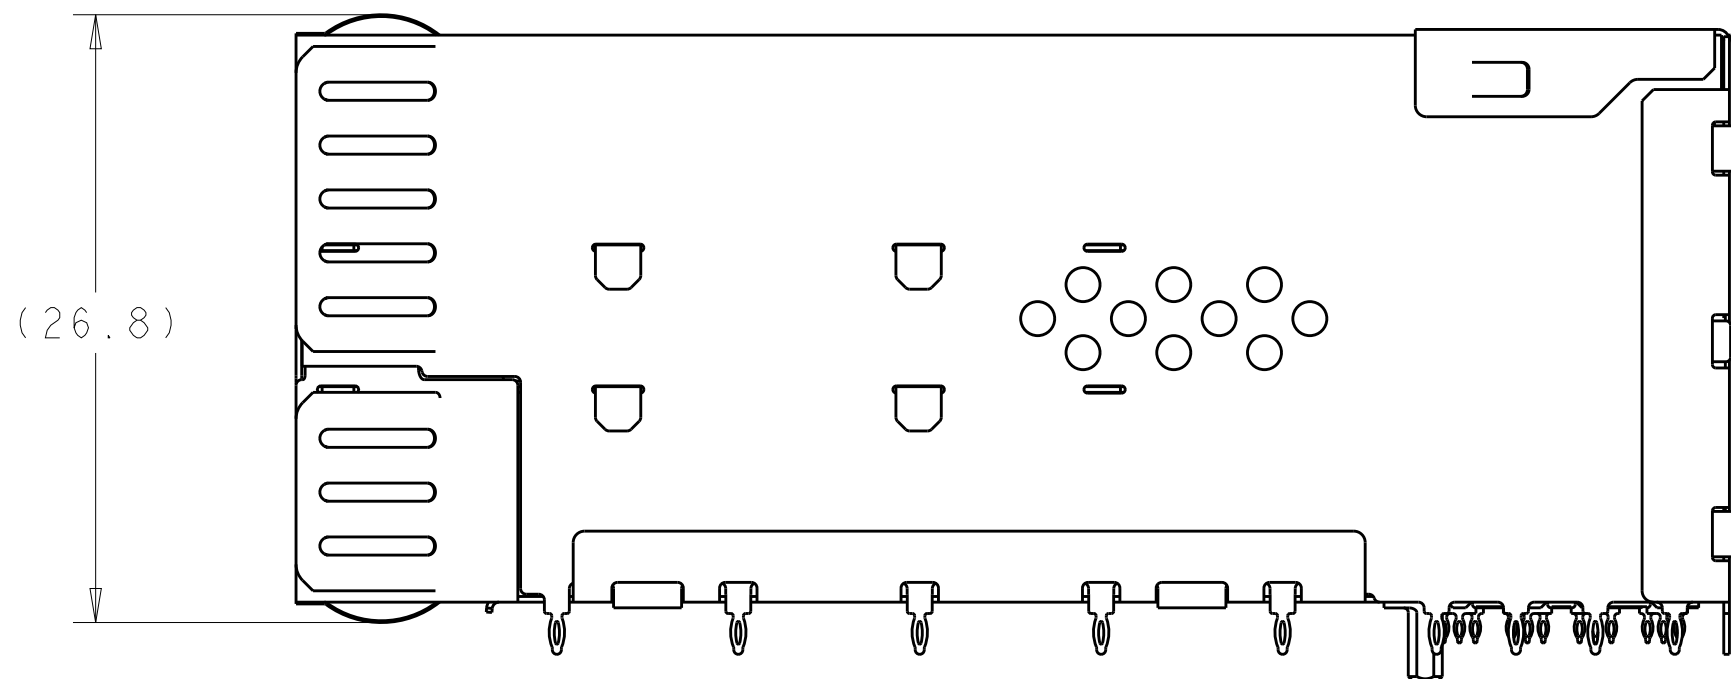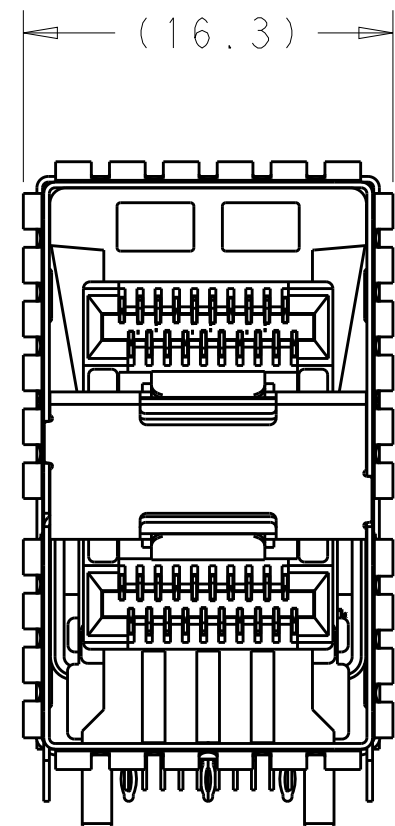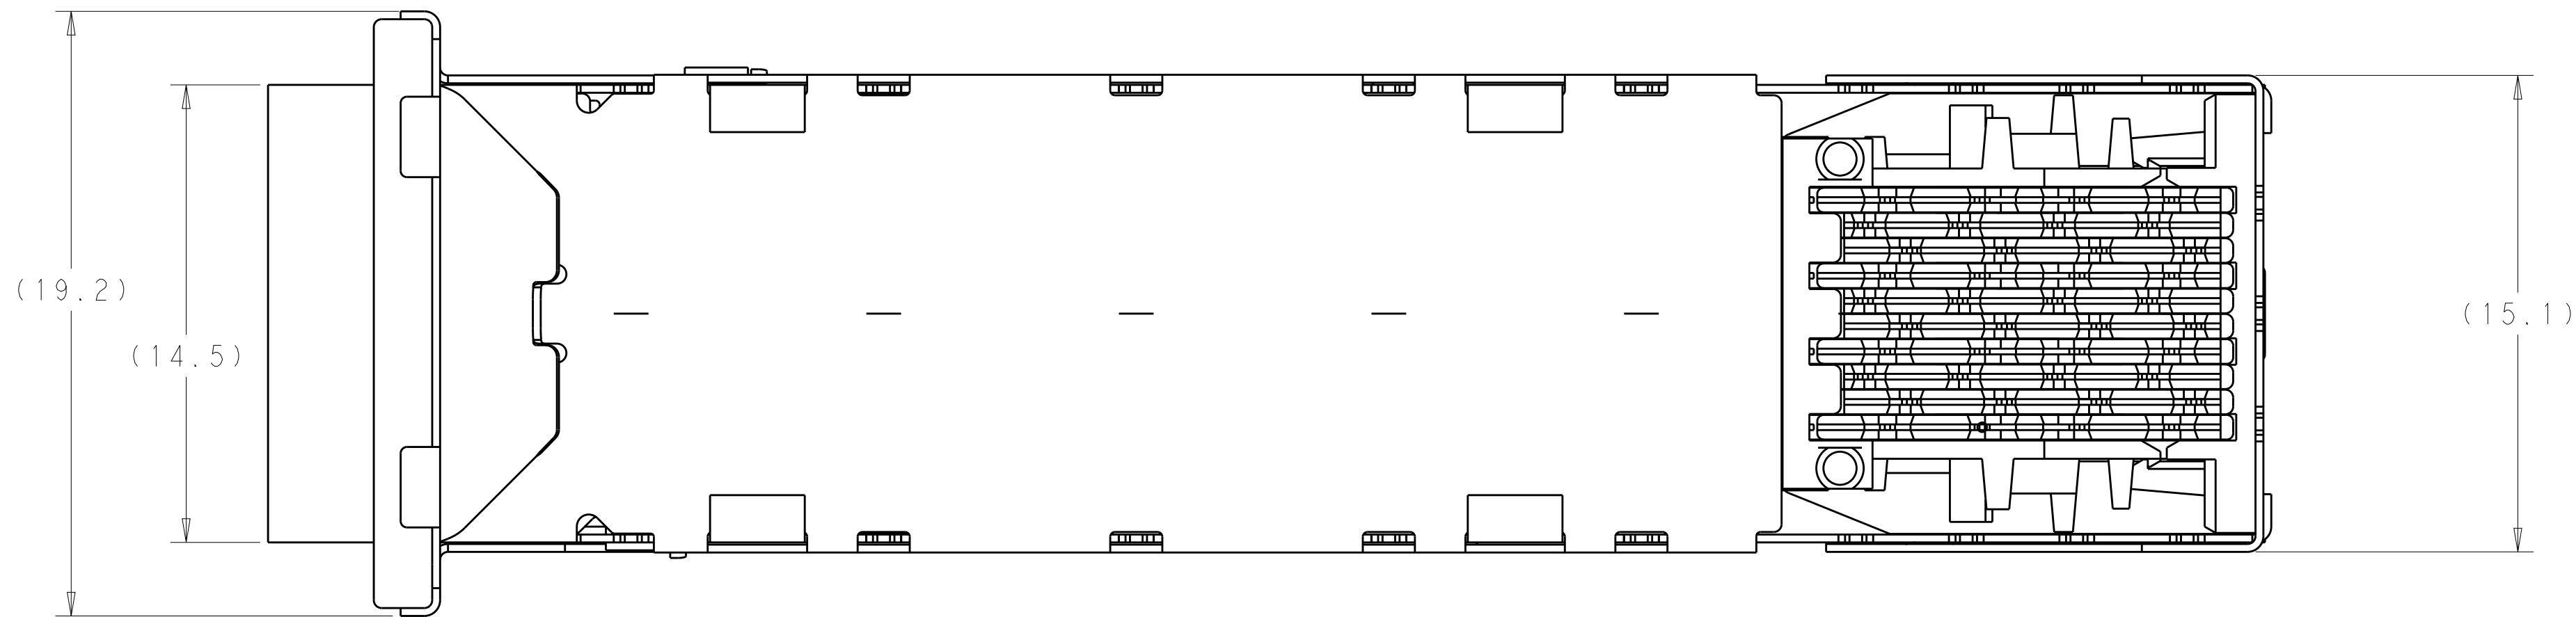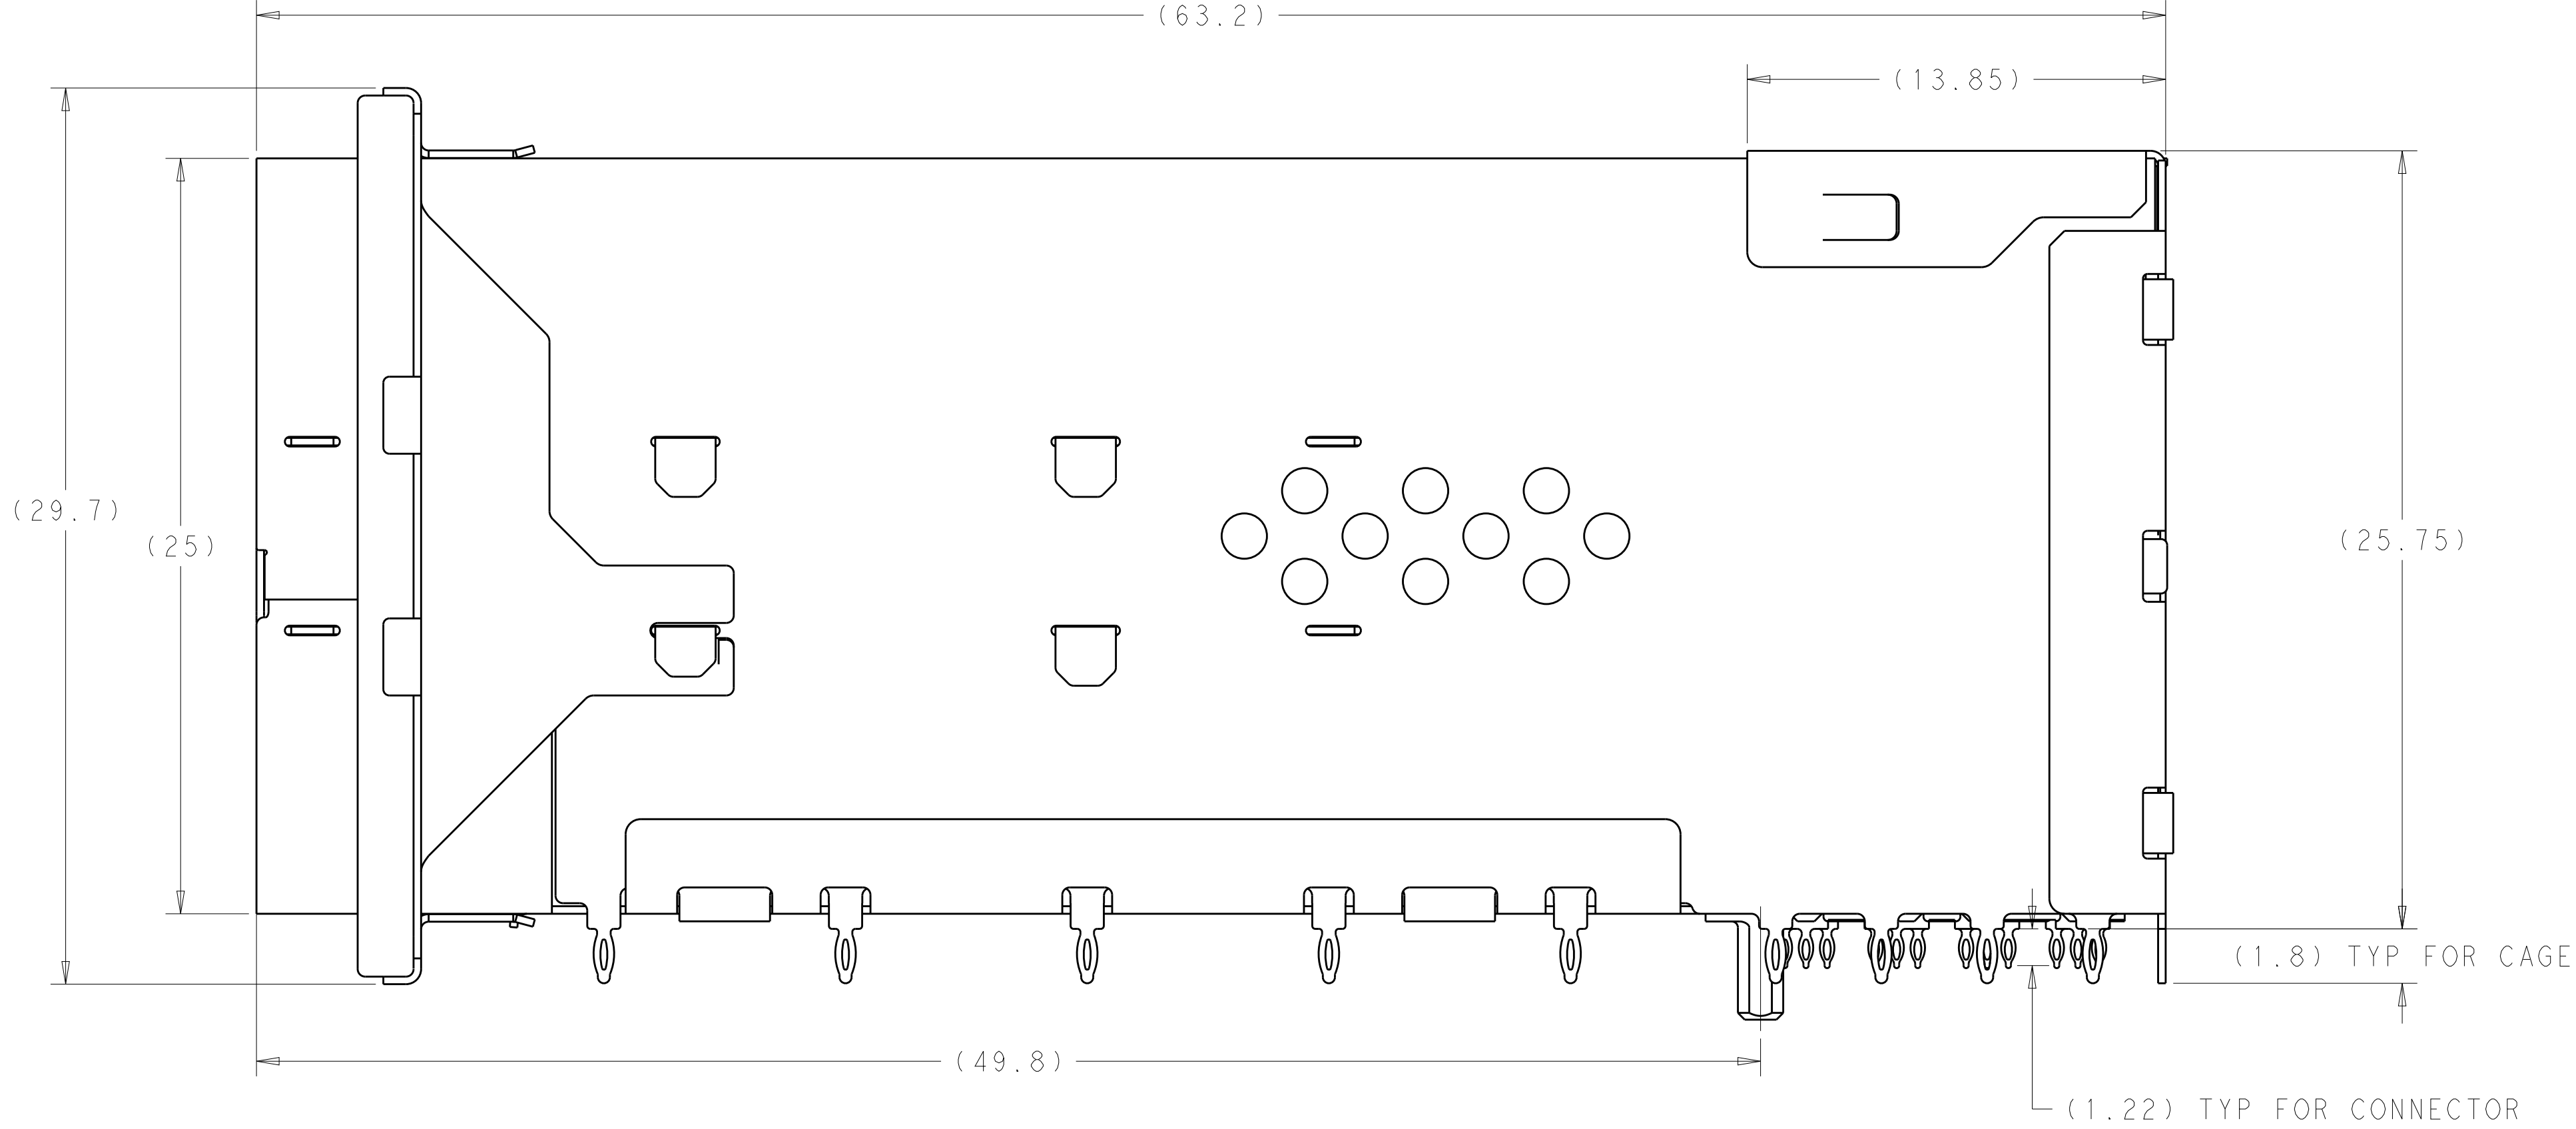

2349202-5 THRU 2349202-8, 1-2349202-9, 2-2349202-0
EMI SPRINGS ONLY
SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	J. WANG	26FEB2019	 TE Connectivity						
DIMENSIONS:				CHK	S. HAN	26FEB2019							
mm				APVD	S. HAN	26FEB2019							
				NAME									
				PRODUCT SPEC			RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56 -						
				108-2481									
				APPLICATION SPEC									
				114-13319									
MATERIAL				WEIGHT			SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
SEE NOTES				-			A100779C=2349202				-		
				CUSTOMER DRAWING			SCALE		6:1	SHEET	2	OF 4	REV A

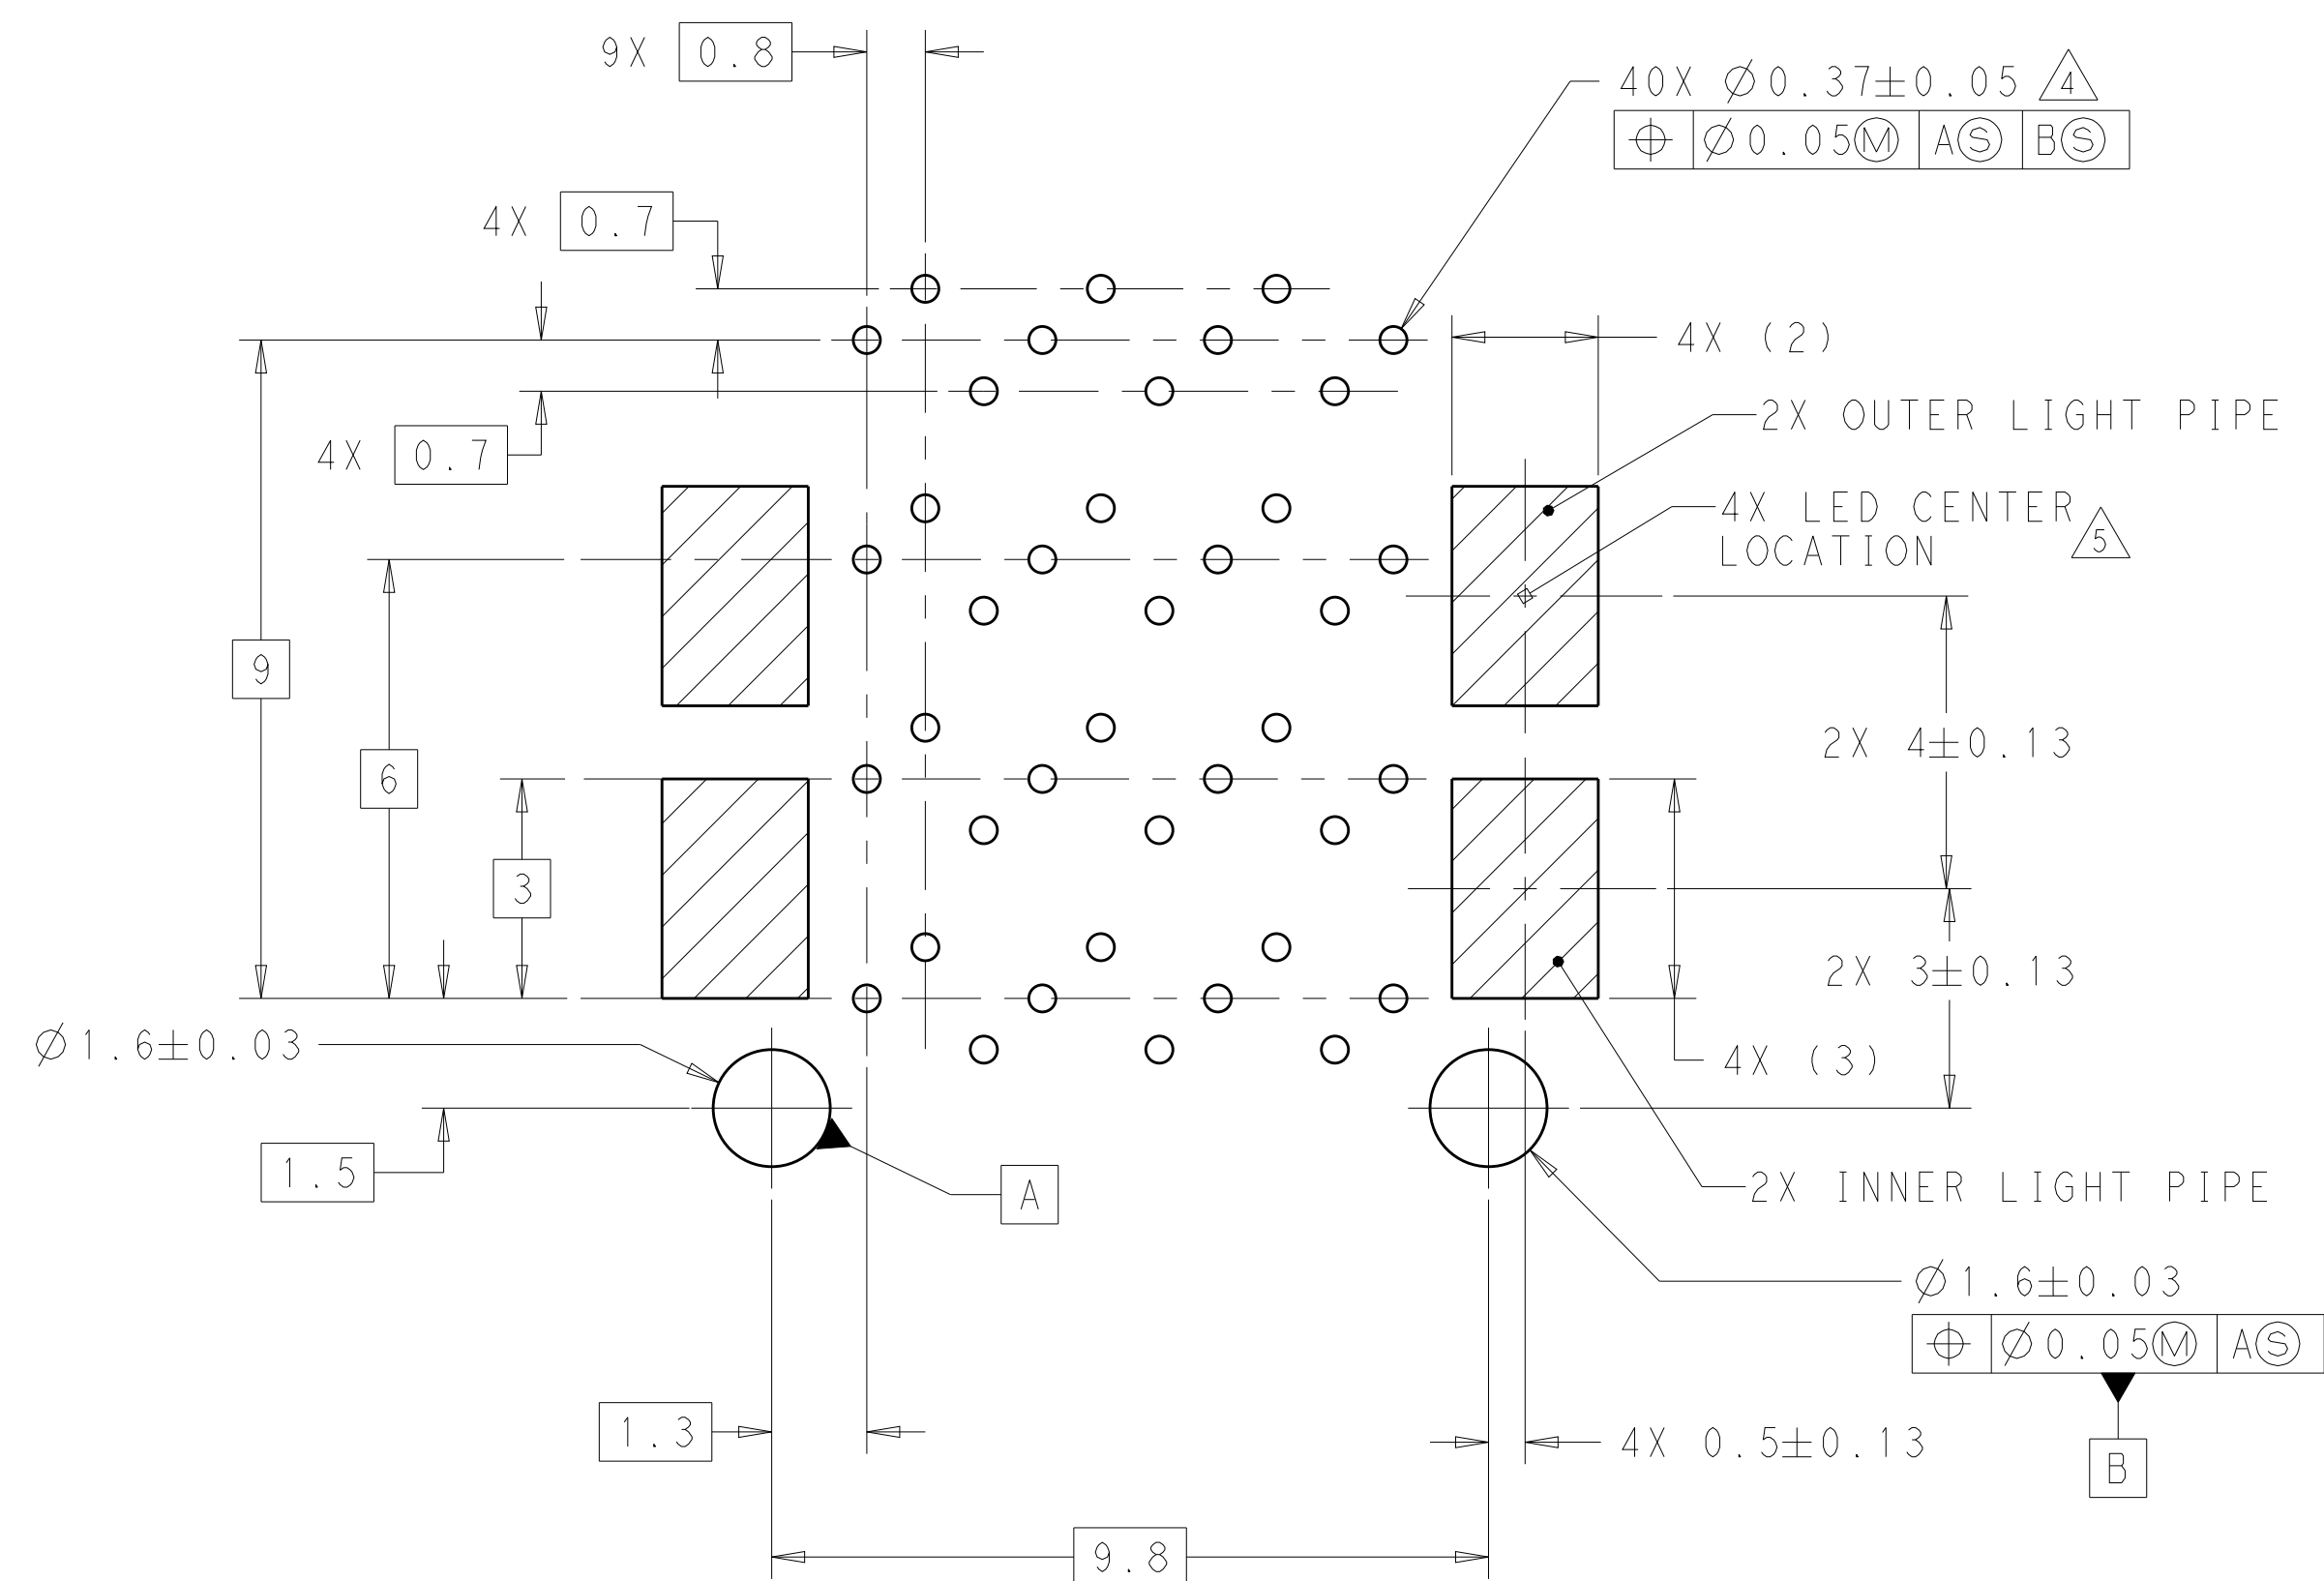

RECOMMENDED PCB LAYOUT
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: J. WANG 26FEB2019 CHG: S. HAN 26FEB2019 APPD: S. HAN 26FEB2019		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.25 1 PLC ± 0.25 2 PLC ± 0.25 3 PLC ± 0.25 4 PLC ± 0.25 ANGLES $\pm 0.5^\circ$		NAME: RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56 -	
		PRODUCT SPEC: 108-2481 APPLICATION SPEC: 114-13319		SIZE: CAGE CODE: DRAWING NO: 100779C-2349202 RESTRICTED TO: -	
MATERIAL: SEE NOTES		FINISH: SEE NOTES		WEIGHT: - CUSTOMER DRAWING:	
				SCALE: 4:1 SHEET 3 of 4 REV: A	

LOC		DIST		REVISIONS					
GP			00	P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

T19○ T16○ T13○
T20○ T17○ T14○ T11○
T18○ T15○ T12○


T2○ T5○ T8○
T1○ T4○ T7○ T10○
T3○ T6○ T9○

L9○ L6○ L3○
L10○ L7○ L4○ L1○
L8○ L5○ L2○



L12○ L15○ L18○
L11○ L14○ L17○ L20○
L13○ L16○ L19○

DETAIL D
PIN MAP
SCALE 15:1

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

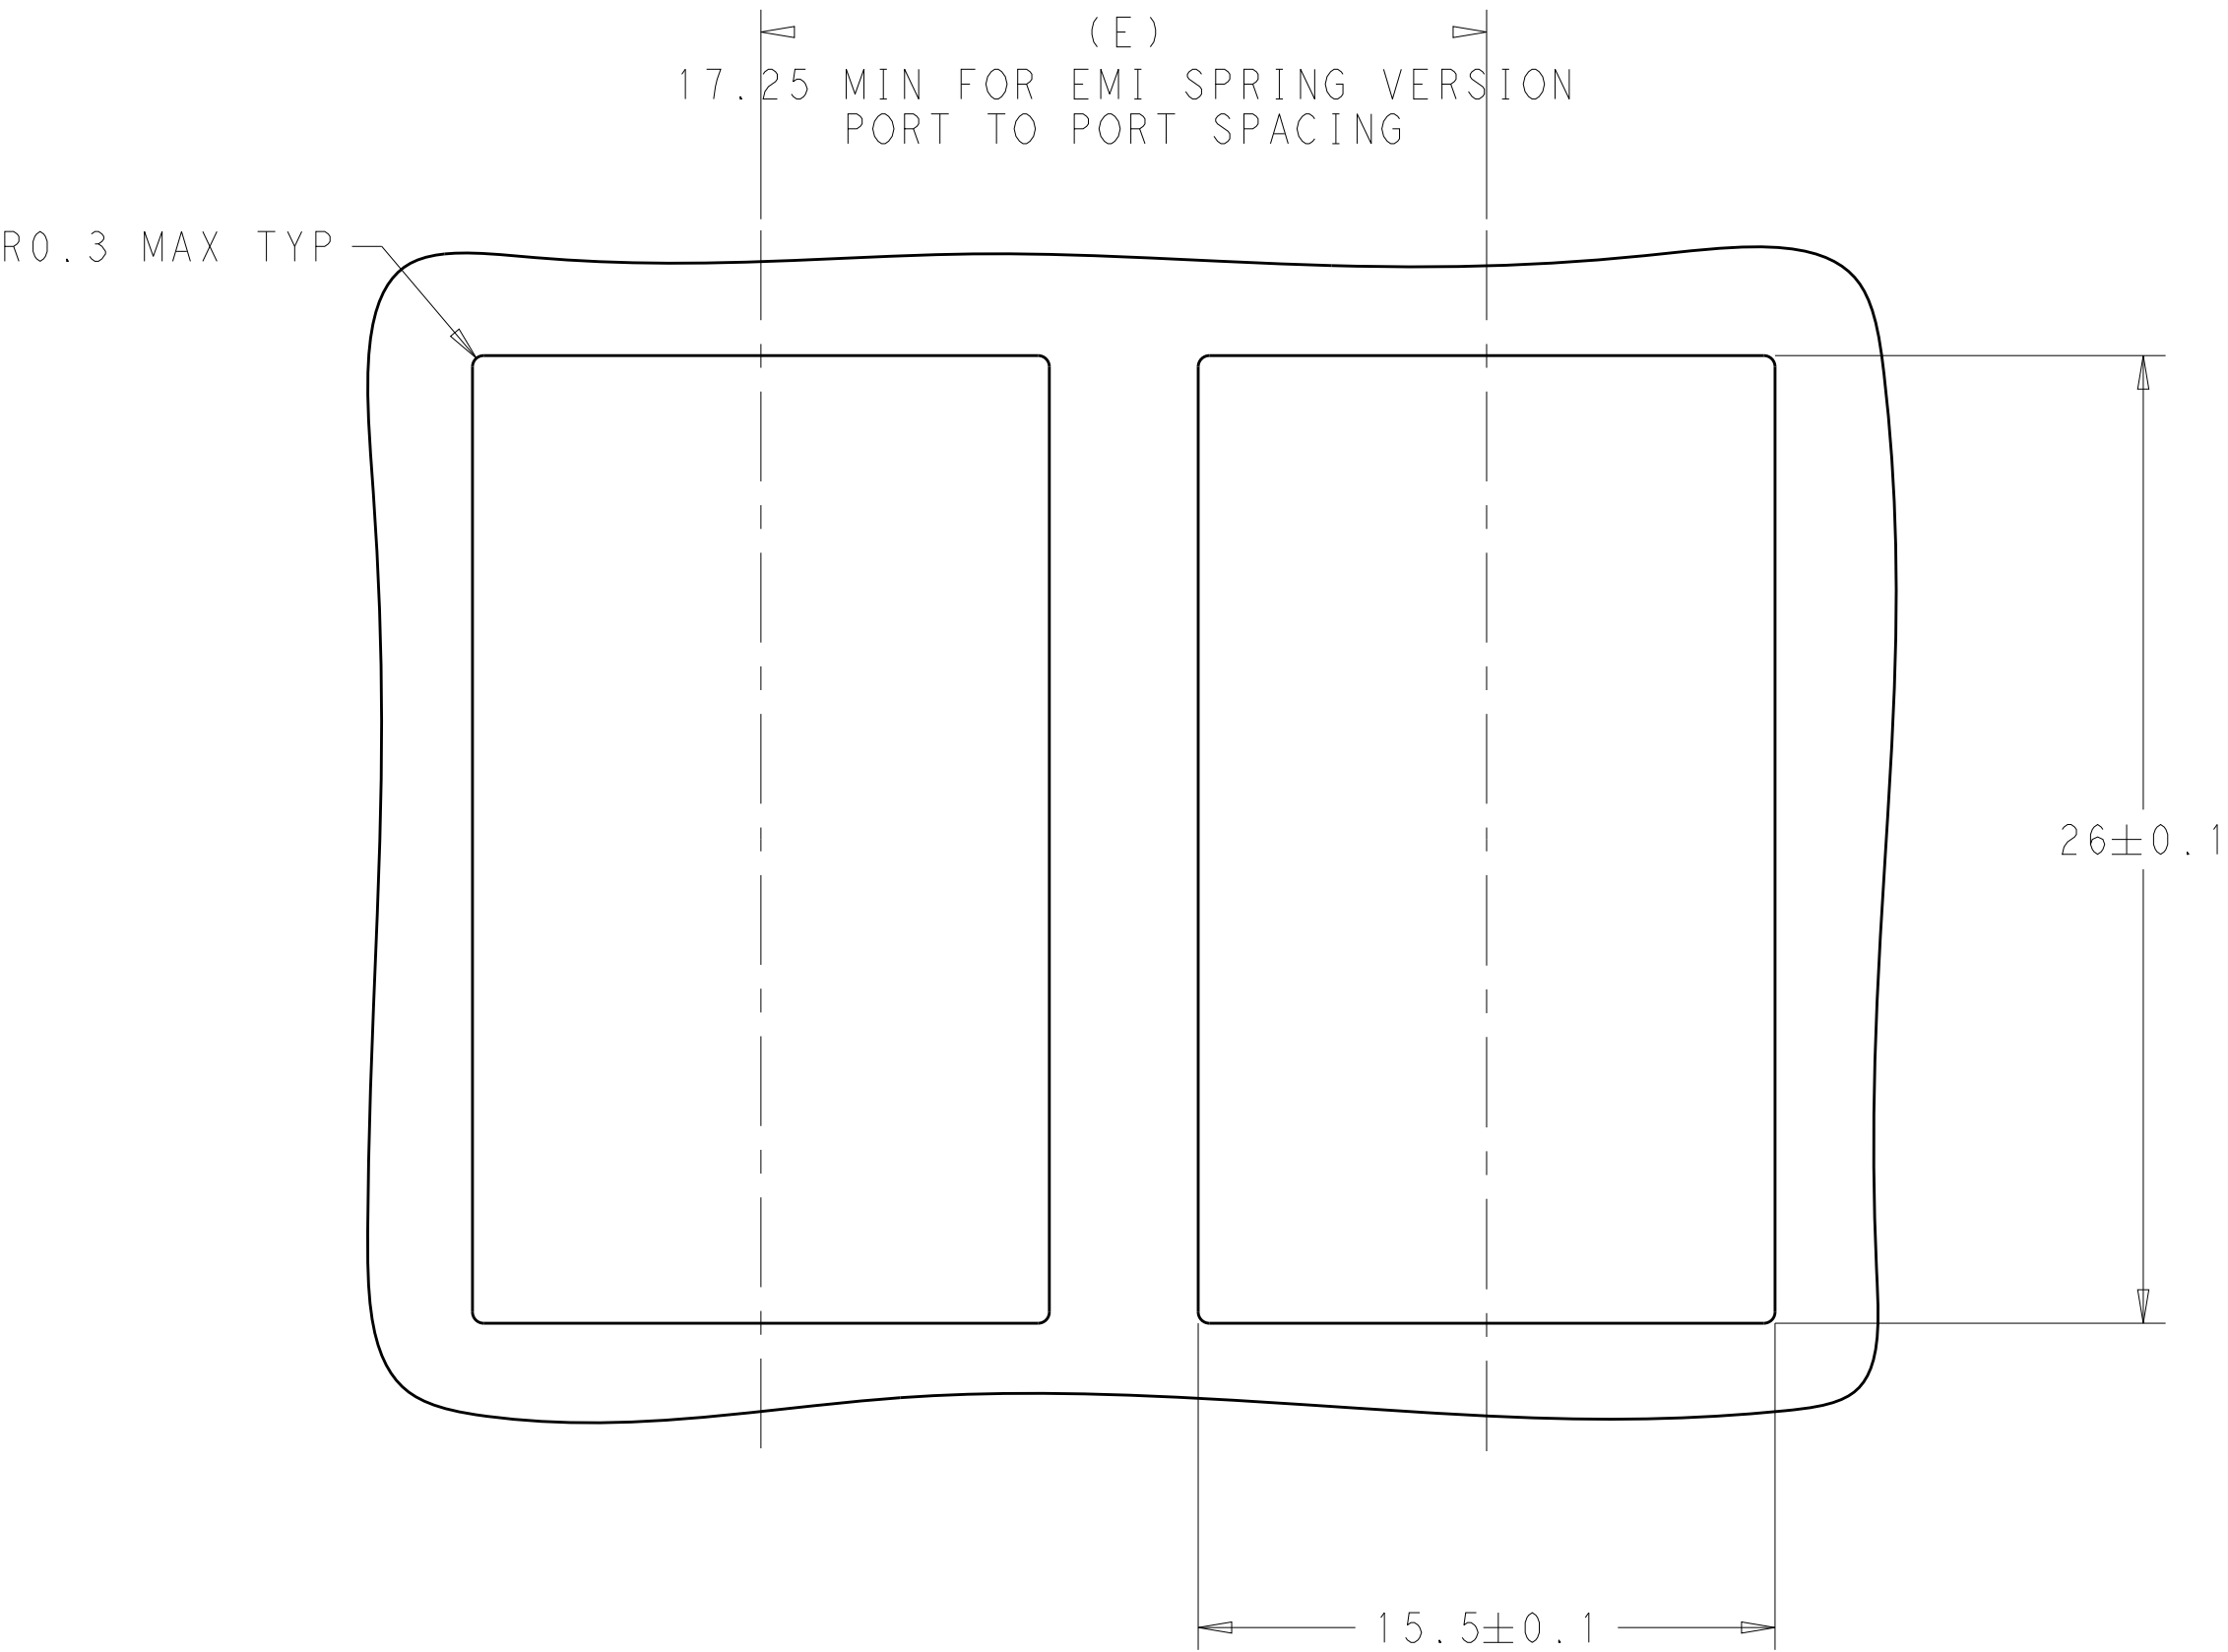

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:1

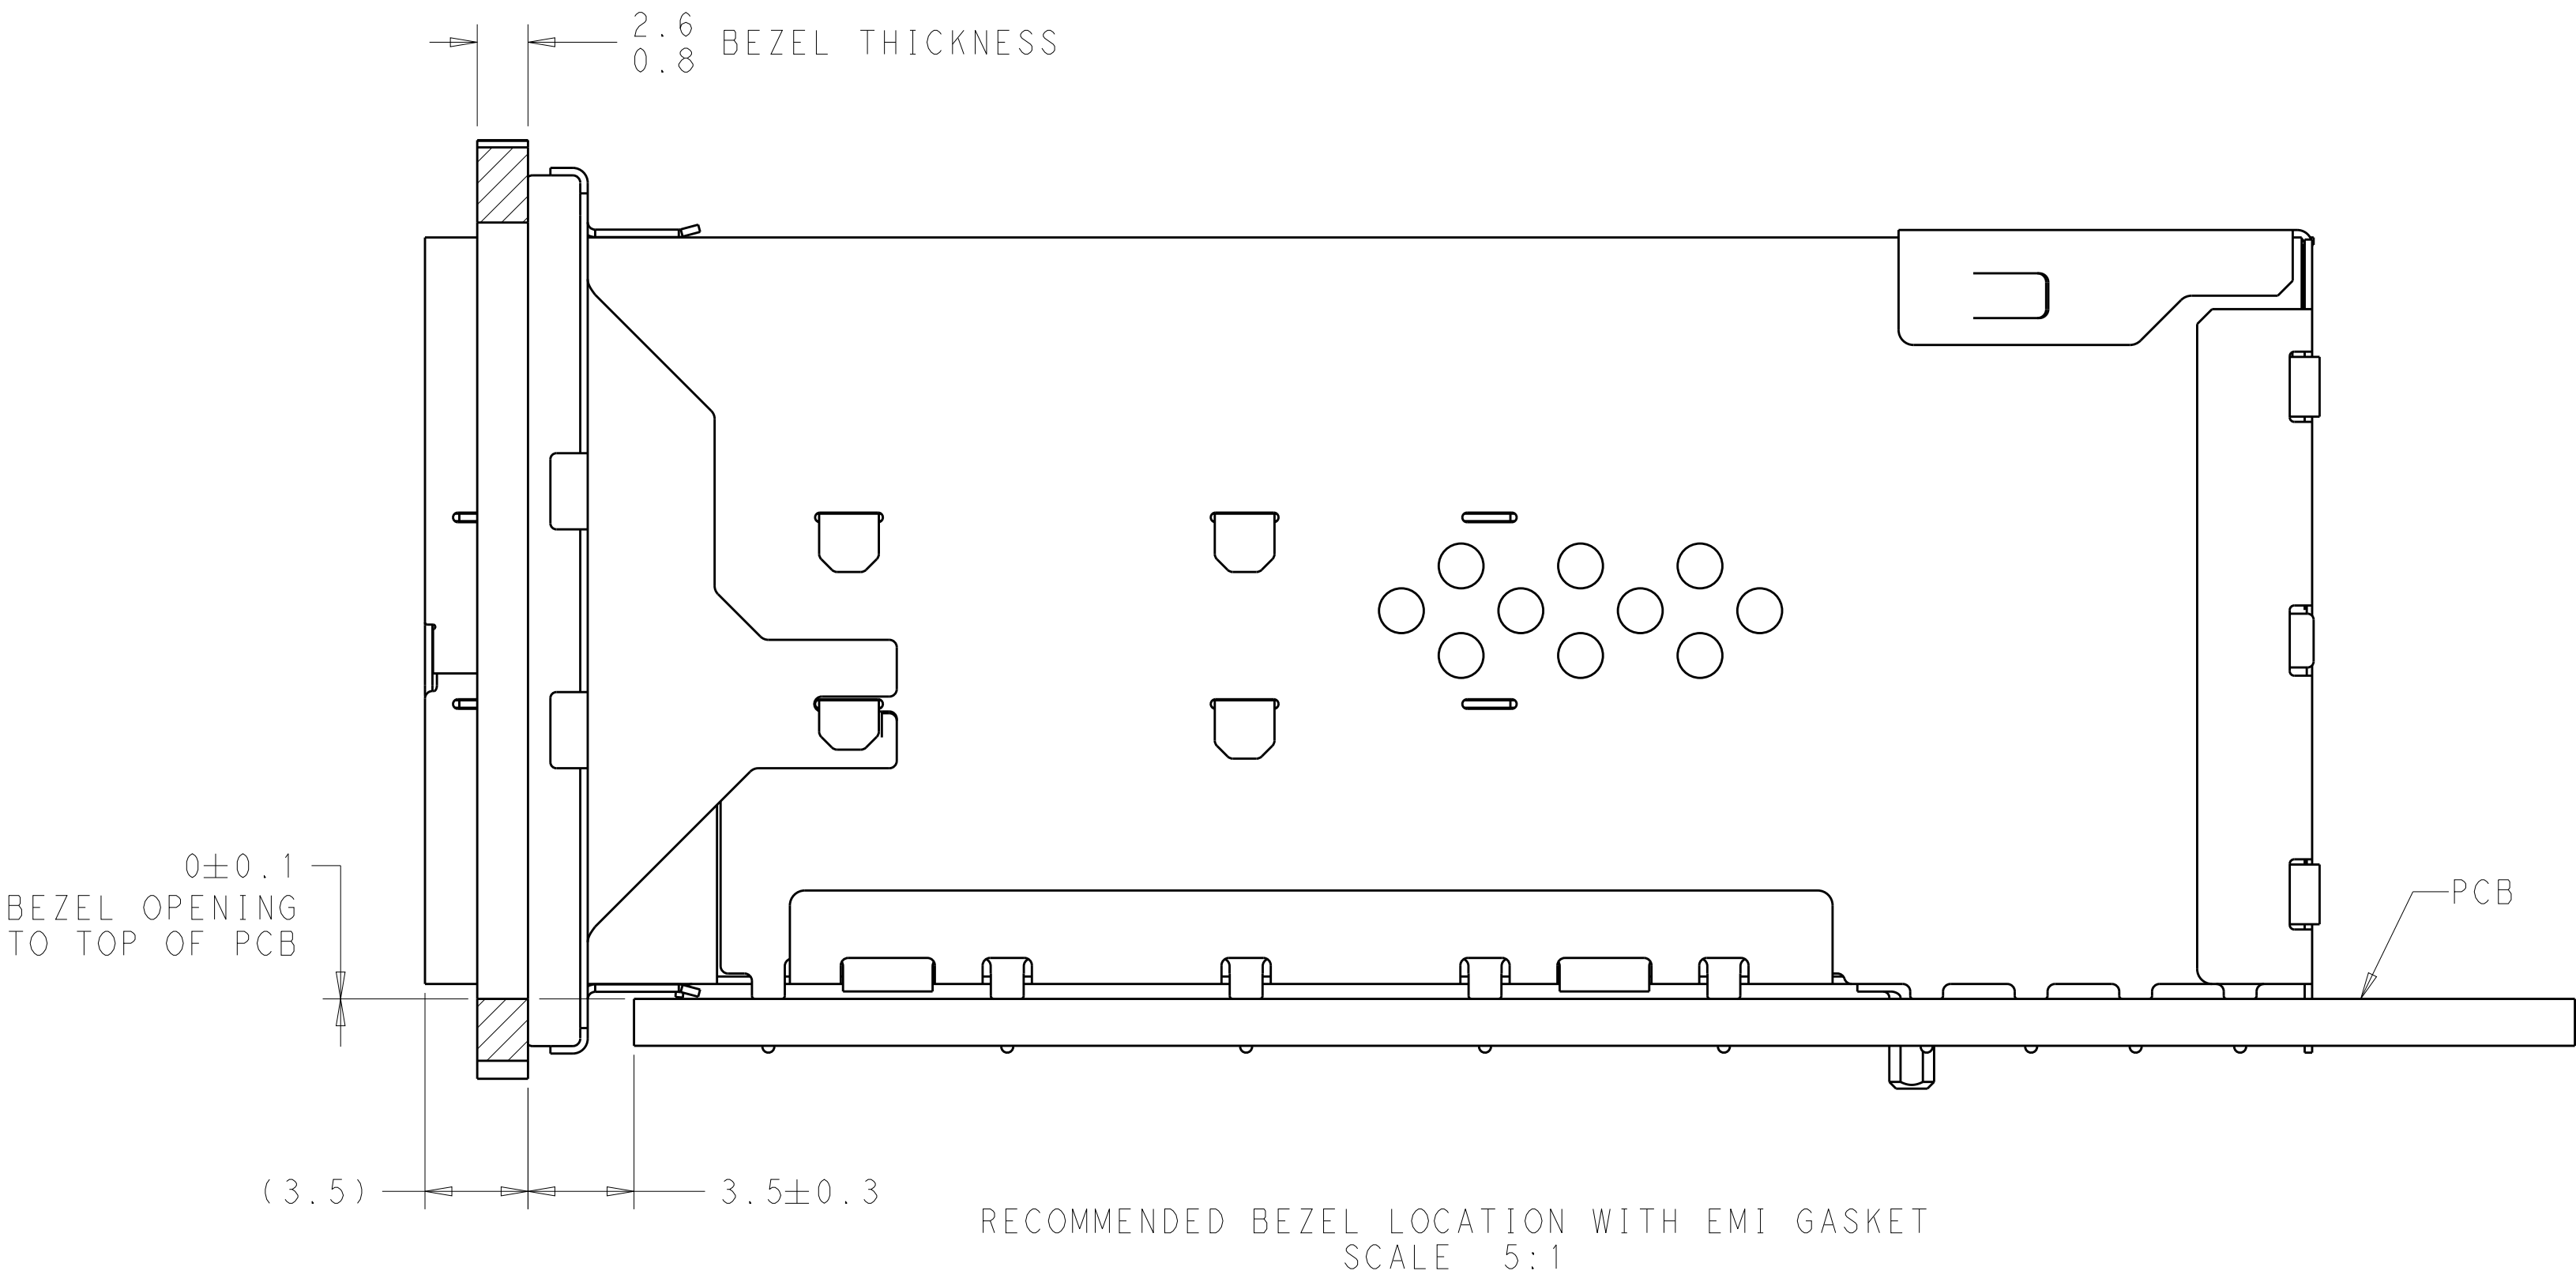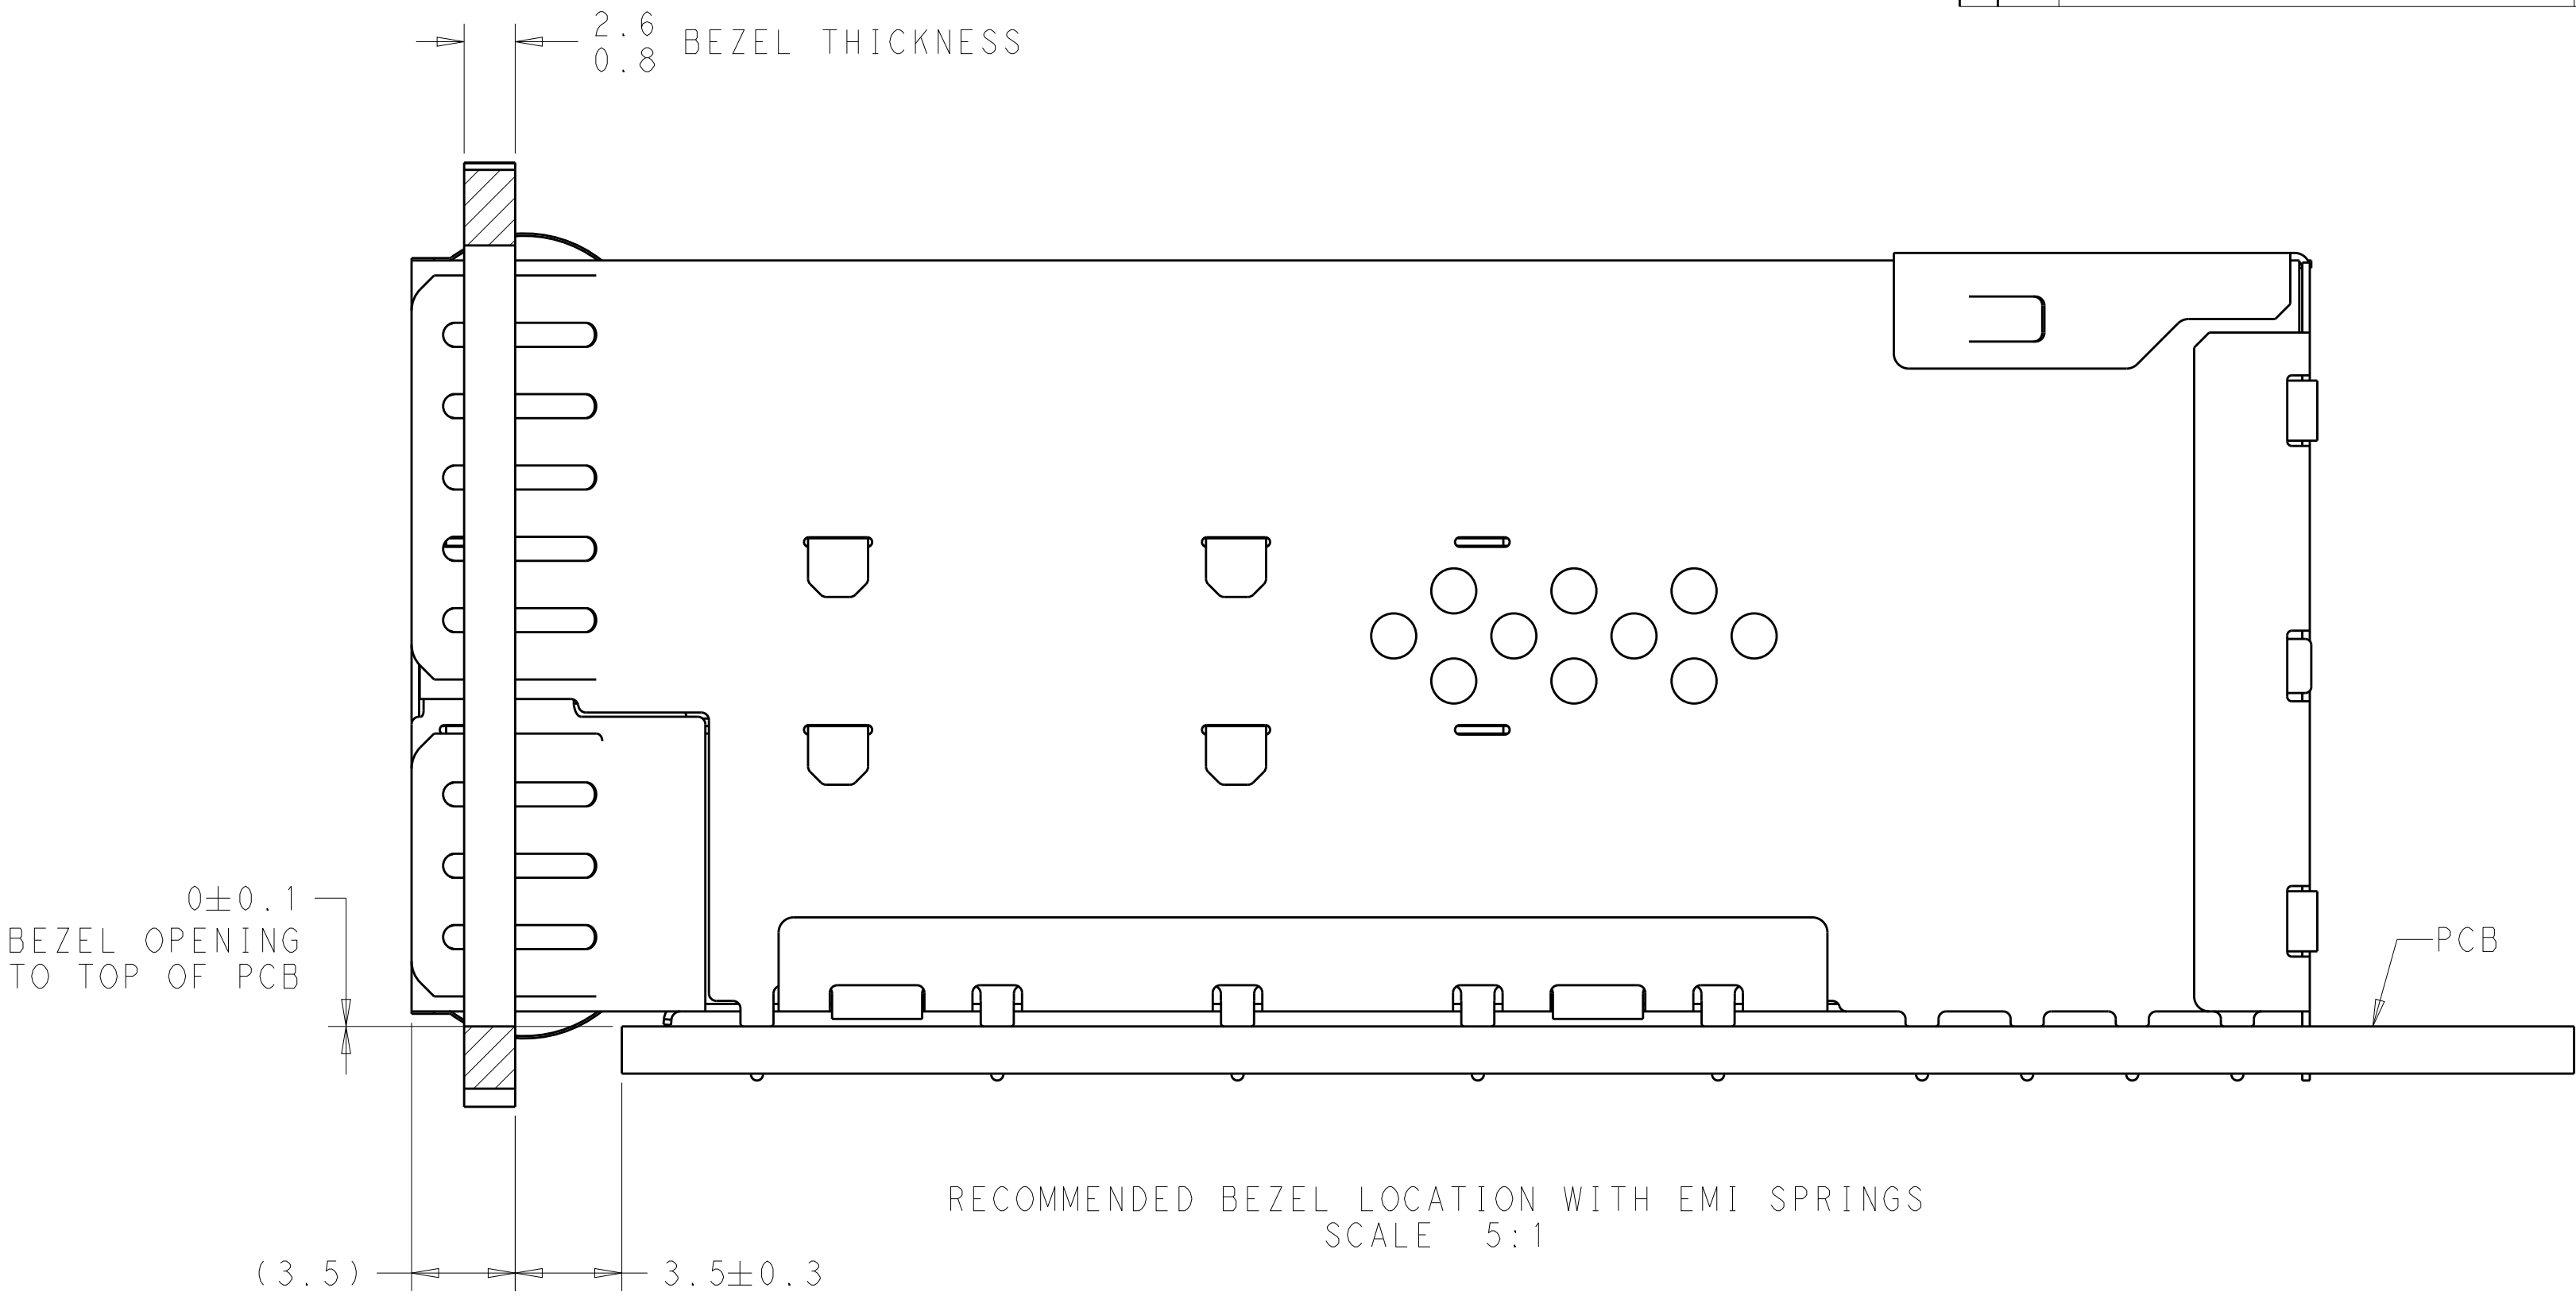

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG	26FEB2019	TE Connectivity	
DIMENSIONS:		CHK S. HAN	26FEB2019		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. HAN	26FEB2019	NAME	RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56
	0 PLC	±0.25	PRODUCT SPEC	SIZE	108-2481
	1 PLC	±0.25	APPLICATION SPEC	CAGE CODE	114-13319
	2 PLC	±0.25	WEIGHT	DRAWING NO	A100779C=2349202
	3 PLC	±0.25	CUSTOMER DRAWING	RESTRICTED TO	-
MATERIAL SEE NOTES	ANGLES FINISH SEE NOTES	4 PLC	±0.25	SCALE	4:1
		5 PLC	±0.25	SHEET	4 OF 4
		6 PLC	±0.25	REV	A

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9