

## MAX4715/MAX4716

## 0.4Ω, Low-Voltage, Single-Supply SPST Analog Switches in SC70

### General Description

The MAX4715/MAX4716 are low on-resistance, low-voltage, single-pole/single-throw (SPST) analog switches that operate from a +1.6V to +3.6V single supply. The MAX4715 is normally open (NO), and the MAX4716 is normally closed (NC). These devices also have fast switching speeds ( $t_{ON} = 18\text{ns}$  max,  $t_{OFF} = 12\text{ns}$  max).

When powered from a +3V supply, the MAX4715/MAX4716 offer 0.4Ω max on-resistance ( $R_{ON}$ ) with 0.1Ω max  $R_{ON}$  flatness. Their digital logic inputs are +1.8V CMOS compatible when using a single +3V supply.

The MAX4715 is pin compatible with the MAX4594, and the MAX4716 is pin compatible with the MAX4595. The MAX4715/MAX4716 are available in SC70-5 packages.

### Applications

- Power Routing
- Battery-Operated Equipment
- Audio and Video Signal Routing
- Low-Voltage Data-Acquisition Systems
- Communications Circuits
- PCMCIA Cards
- Cellular Phones
- Modems
- Hard Drives

### Benefits and Features

- Low  $R_{ON}$ 
  - 0.4Ω max (+3V Supply)
  - 1.2Ω max (+1.8V Supply)
- 0.1Ω max  $R_{ON}$  Flatness (+3V Supply)
- +1.6V to +3.6V Single-Supply Operation
- Available in 5-Pin SC70 Packages
- Fast Switching:  $t_{ON} = 18\text{ns}$  max,  $t_{OFF} = 12\text{ns}$  max
- +1.8V CMOS Logic Compatible (+3V Supply)
- Pin Compatible with MAX4594 (MAX4715)  
Pin Compatible with MAX4595 (MAX4716)

[Ordering Information](#) appears at end of data sheet.

MAX4715/MAX4716

0.4Ω, Low-Voltage, Single-Supply  
SPST Analog Switches in SC70

Absolute Maximum Ratings

|                                                       |                      |                                         |                 |
|-------------------------------------------------------|----------------------|-----------------------------------------|-----------------|
| Voltages Referenced to GND                            |                      | Operating Temperature Range             |                 |
| V+, IN .....                                          | -0.3V to +4V         | MAX471_EXK.....                         | -40°C to +85°C  |
| COM, NO, NC (Note 1) .....                            | -0.3V to (V+ + 0.3V) | Junction Temperature.....               | +150°C          |
| Continuous Current NO, NC to COM.....                 | ±300mA               | Storage Temperature Range .....         | -65°C to +150°C |
| Peak Switch Current NO, NC to COM                     |                      | Lead Temperature (soldering, 10s) ..... | +300°C          |
| (pulsed at 1ms, 10% duty cycle max) .....             | ±600mA               |                                         |                 |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C) |                      |                                         |                 |
| 5-Pin SC70 (derate 3.1mW/°C above +70°C).....         | 247mW                |                                         |                 |

**Note 1:** Signals on NO, NC, or COM exceeding V+ or GND are clamped by internal diodes.

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Information

5-PIN SC70

|                |         |
|----------------|---------|
| Outline Number | 21-0076 |
|----------------|---------|

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

**Electrical Characteristics—Single +3V Supply**

(V+ = +2.7V to +3.6V, V<sub>IH</sub> = +1.4V, V<sub>IL</sub> = +0.5V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at V+ = +3.0V and T<sub>A</sub> = +25°C.) (Notes 2, 3)

| PARAMETER                          | SYMBOL                                                  | CONDITIONS                                                                                                               | T <sub>A</sub>                                | MIN       | TYP         | MAX     | UNITS |
|------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------|-------------|---------|-------|
| <b>ANALOG SWITCH</b>               |                                                         |                                                                                                                          |                                               |           |             |         |       |
| Analog Signal Range                | V <sub>COM</sub> ,<br>V <sub>NO</sub> , V <sub>NC</sub> |                                                                                                                          |                                               | 0         |             | V+      | V     |
| On-Resistance (Note 6)             | R <sub>ON</sub>                                         | V+ = 2.7V, I <sub>COM</sub> = 100mA,<br>V <sub>NO</sub> or V <sub>NC</sub> = 1.5V                                        | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> |           | 0.3<br>0.45 | 0.4     | Ω     |
| On-Resistance Flatness<br>(Note 4) | R <sub>FLAT(ON)</sub>                                   | V+ = 2.7V, I <sub>COM</sub> = 100mA,<br>V <sub>NO</sub> or V <sub>NC</sub> = 0.6, 1.5V, 2.1V                             | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> |           | 0.05<br>0.1 | 0.09    | Ω     |
| NO, NC Off-Leakage<br>Current      | I <sub>NO(OFF)</sub> or<br>I <sub>NC(OFF)</sub> or      | V+ = 3.3V, V <sub>COM</sub> = 0.3V, 3V<br>V <sub>NO</sub> or V <sub>NC</sub> = 3V, 0.3V                                  | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> | -1<br>-10 | 0.01        | 1<br>10 | nA    |
| COM Off-Leakage Current            | I <sub>COM(OFF)</sub>                                   | V+ = 3.3V, V <sub>COM</sub> = 0.3V, 3V<br>V <sub>NO</sub> or V <sub>NC</sub> = 3V, 0.3V                                  | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> | -1<br>-10 | 0.01        | 1<br>10 | nA    |
| COM On-Leakage Current             | I <sub>COM(ON)</sub>                                    | V+ = 3.3V, V <sub>COM</sub> = 0.3V, 3V,<br>V <sub>NO</sub> or V <sub>NC</sub> = 0.3V, 3V or open                         | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> | -2<br>-10 |             | 2<br>10 | nA    |
| <b>DYNAMIC</b>                     |                                                         |                                                                                                                          |                                               |           |             |         |       |
| Turn-On Time                       | t <sub>ON</sub>                                         | V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, R <sub>L</sub> = 50Ω,<br>C <sub>L</sub> = 35pF, <a href="#">Figure 1</a>      | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> |           | 12<br>20    | 18      | ns    |
| Turn-Off Time                      | t <sub>OFF</sub>                                        | V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, R <sub>L</sub> = 50Ω,<br>C <sub>L</sub> = 35pF, <a href="#">Figure 1</a>      | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> |           | 6<br>15     | 12      | ns    |
| Charge Injection                   | Q                                                       | V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0,<br>C <sub>L</sub> = 1.0nF, <a href="#">Figure 2</a>                          | +25°C                                         |           | 20          |         | pC    |
| Off-Isolation (Note 5)             | V <sub>ISO</sub>                                        | f = 1MHz, V <sub>COM</sub> = 1V <sub>RMS</sub> ,<br>R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF, <a href="#">Figure 3</a> | +25°C                                         |           | -54         |         | dB    |
| Total Harmonic Distortion          | THD                                                     | f = 20Hz to 20kHz,<br>V <sub>COM</sub> = 2V <sub>P-P</sub> , R <sub>L</sub> = 32Ω                                        | +25°C                                         |           | 0.01        |         | %     |
| NC or NO Off-Capacitance           | C <sub>NO(OFF)</sub><br>C <sub>NC(OFF)</sub>            | f = 1MHz, <a href="#">Figure 4</a>                                                                                       | +25°C                                         |           | 55          |         | pF    |
| COM Off-Capacitance                | C <sub>COM(OFF)</sub>                                   | f = 1MHz, <a href="#">Figure 4</a>                                                                                       | +25°C                                         |           | 55          |         | pF    |
| COM On-Capacitance                 | C <sub>COM(ON)</sub>                                    | f = 1MHz, <a href="#">Figure 4</a>                                                                                       | +25°C                                         |           | 80          |         | pF    |
| <b>LOGIC INPUT</b>                 |                                                         |                                                                                                                          |                                               |           |             |         |       |
| Input Voltage Low                  | V <sub>IL</sub>                                         |                                                                                                                          |                                               |           |             | 0.5     | V     |
| Input Voltage High                 | V <sub>IH</sub>                                         |                                                                                                                          |                                               | 1.4       |             |         | V     |
| Input Leakage Current              | I <sub>IN</sub>                                         | V <sub>IN</sub> = 0 or V+                                                                                                |                                               | -1        |             | 1       | μA    |
| <b>SUPPLY</b>                      |                                                         |                                                                                                                          |                                               |           |             |         |       |
| Power-Supply Range                 | V+                                                      |                                                                                                                          |                                               | 1.6       |             | 3.6     | V     |
| Positive Supply Current            | I+                                                      | V+ = +3.6V, V <sub>IN</sub> = 0 or V+                                                                                    | +25°C<br>T <sub>MIN</sub> to T <sub>MAX</sub> |           | 0.04<br>2   | 0.2     | μA    |


## Electrical Characteristics—Single +1.8V Supply

(V+ = +1.8V, V<sub>IH</sub> = +1V, V<sub>IL</sub> = +0.4V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 2, 3)

| PARAMETER                    | SYMBOL                                                  | CONDITIONS                                                                                                          | T <sub>A</sub>                       | MIN  | TYP | MAX | UNITS |
|------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------|------|-----|-----|-------|
| ANALOG SWITCH                |                                                         |                                                                                                                     |                                      |      |     |     |       |
| Analog Signal Range          | V <sub>COM</sub> ,<br>V <sub>NO</sub> , V <sub>NC</sub> |                                                                                                                     |                                      | 0    |     | V+  | V     |
| On-Resistance                | R <sub>ON</sub>                                         | I <sub>COM</sub> = 10mA,<br>V <sub>NO</sub> or V <sub>NC</sub> = 0.9V                                               | +25°C                                | 0.6  | 1.2 | Ω   |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> |      | 2.5 |     |       |
| NO or NC Off-Leakage Current | I <sub>NO(OFF)</sub> or<br>I <sub>NC(OFF)</sub>         | V <sub>COM</sub> = 0.3V, 1.5V,<br>V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, 0.3V                                   | +25°C                                | -1   | 1   | nA  |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> | -10  | 10  |     |       |
| COM Off-Leakage Current      | I <sub>COM(OFF)</sub>                                   | V <sub>COM</sub> = 0.3V, 1.5V,<br>V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, 0.3V                                   | +25°C                                | -1   | 1   | nA  |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> | -10  | 10  |     |       |
| COM On-Leakage Current       | I <sub>COM(ON)</sub>                                    | V <sub>COM</sub> = 1.5V, 0.3V, V <sub>NO</sub> or<br>V <sub>NC</sub> = 1.5V, 0.3V, or open                          | +25°C                                | -2   | 2   | nA  |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> | -10  | 10  |     |       |
| DYNAMIC                      |                                                         |                                                                                                                     |                                      |      |     |     |       |
| Turn-On Time                 | t <sub>ON</sub>                                         | V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, R <sub>L</sub> = 50Ω,<br>C <sub>L</sub> = 35pF, <a href="#">Figure 1</a> | +25°C                                | 18   | 25  | ns  |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> |      | 30  |     |       |
| Turn-Off Time                | t <sub>OFF</sub>                                        | V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, R <sub>L</sub> = 50Ω,<br>C <sub>L</sub> = 35pF, <a href="#">Figure 1</a> | +25°C                                | 9    | 20  | ns  |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> |      | 25  |     |       |
| Charge Injection             | Q                                                       | V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0,<br>C <sub>L</sub> = 1nF, <a href="#">Figure 2</a>                       | +25°C                                | 40   |     | pC  |       |
| LOGIC INPUT                  |                                                         |                                                                                                                     |                                      |      |     |     |       |
| Input Voltage Low            | V <sub>IL</sub>                                         |                                                                                                                     |                                      |      | 0.4 | V   |       |
| Input Voltage High           | V <sub>IH</sub>                                         |                                                                                                                     |                                      | 1    |     | V   |       |
| Input Leakage Current        | I <sub>IN</sub>                                         | V <sub>IN</sub> = 0 or V+                                                                                           |                                      |      | 1   | μA  |       |
| SUPPLY                       |                                                         |                                                                                                                     |                                      |      |     |     |       |
| Positive Supply Current      | I+                                                      | V <sub>IN</sub> = 0 or V+                                                                                           | +25°C                                | 0.04 | 0.2 | μA  |       |
|                              |                                                         |                                                                                                                     | T <sub>MIN</sub> to T <sub>MAX</sub> |      | 2   |     |       |

**Note 2:** The algebraic convention, where the most negative value is a minimum and the most positive value a maximum, is used in this data sheet.**Note 3:** SC70-packaged parts are 100% tested at +25°C. Limits across the full temperature range are guaranteed by design and correlation.**Note 4:** Flatness is defined as the difference between the maximum and minimum values of on-resistance as measured over the specified analog signal range.**Note 5:** Off-Isolation = 20log<sub>10</sub> [V<sub>COM</sub> / (V<sub>NC</sub> or V<sub>NO</sub>)], V<sub>COM</sub> = output, V<sub>NC</sub> or V<sub>NO</sub> = input to off switch.**Note 6:** Guaranteed by design.

## Typical Operating Characteristics

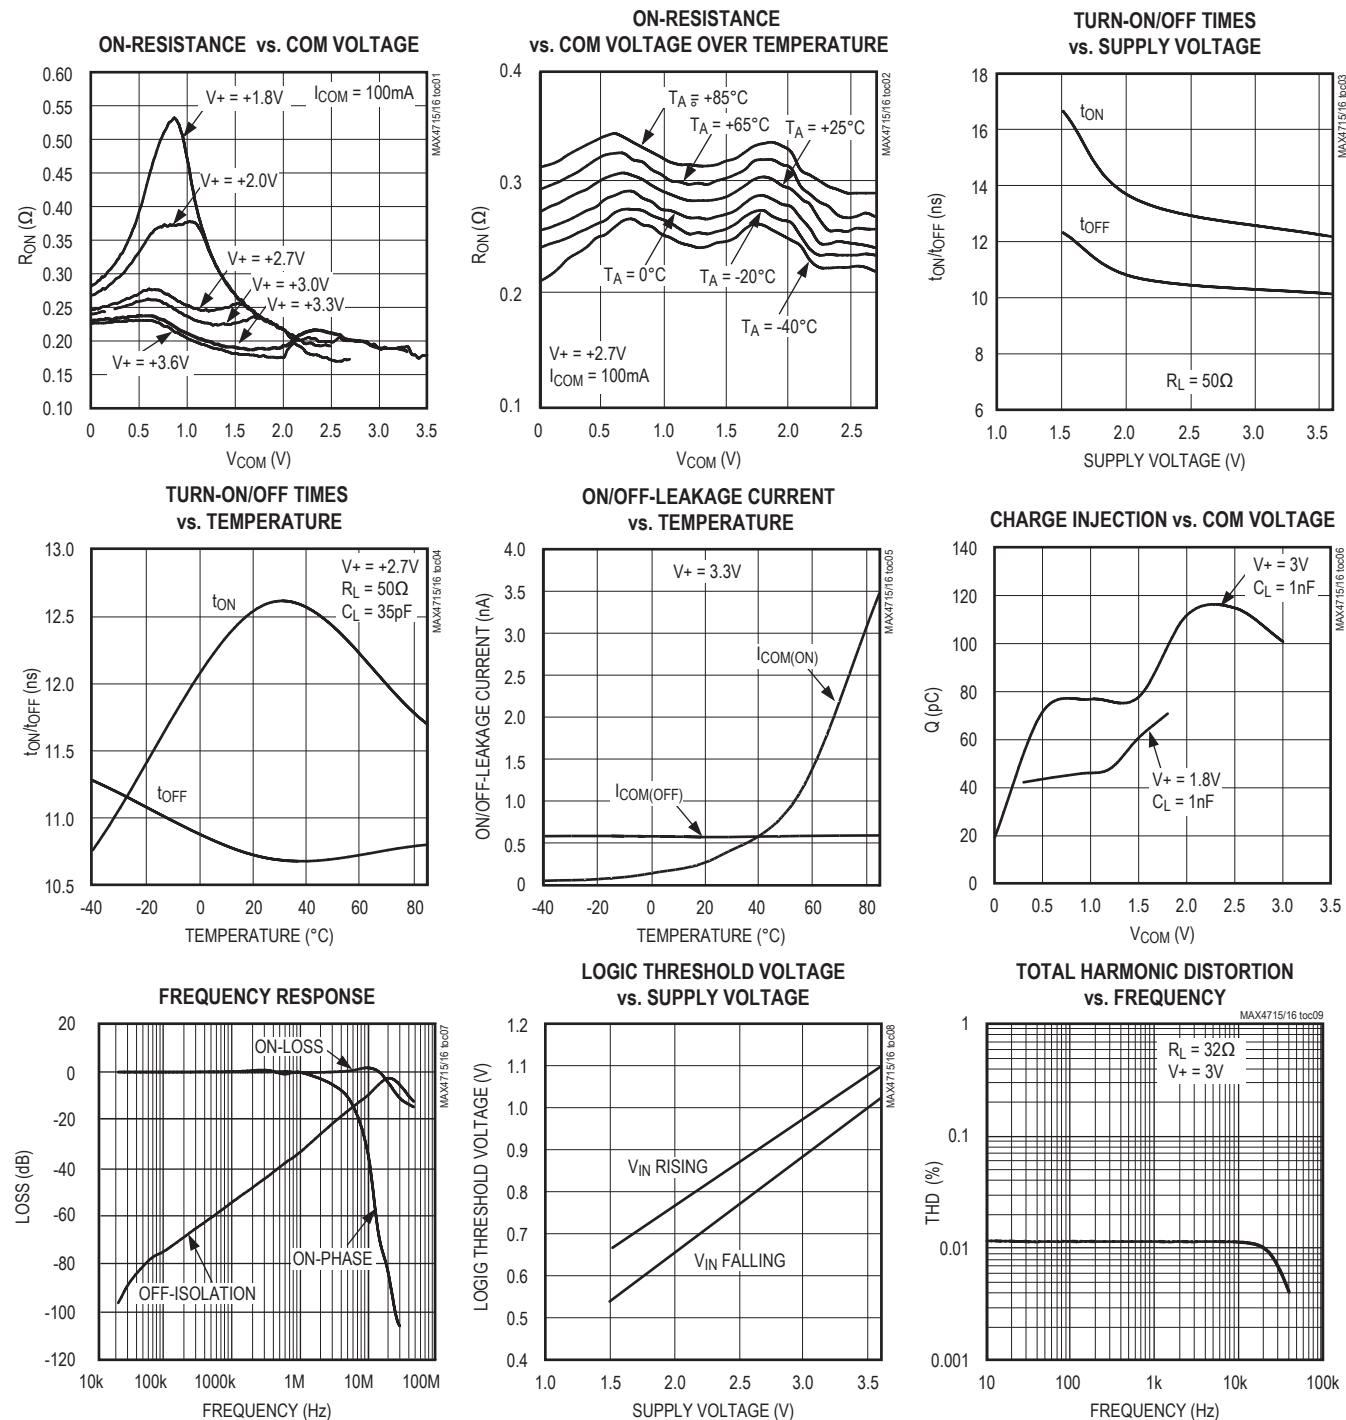(T<sub>A</sub> = +25°C, unless otherwise noted.)

MAX4715/MAX4716

0.4Ω, Low-Voltage, Single-Supply  
SPST Analog Switches in SC70

Pin Configurations/Functional Diagrams/Truth Tables

TOP VIEW

MAX4715

SC70-5

| MAX4715 |        |
|---------|--------|
| LOGIC   | SWITCH |
| 0       | OFF    |
| 1       | ON     |

MAX4716

SC70-5

| MAX4716 |        |
|---------|--------|
| LOGIC   | SWITCH |
| 0       | ON     |
| 1       | OFF    |

SWITCHES SHOWN FOR LOGIC "0" INPUT.

Pin Description

| BUMP    |         | NAME | FUNCTION                      |
|---------|---------|------|-------------------------------|
| MAX4715 | MAX4716 |      |                               |
| 1       | 1       | COM  | Analog Switch—Common          |
| 2       | —       | NO   | Analog Switch—Normally Open   |
| 3       | 2       | NC   | Analog Switch—Normally Closed |
| —       | 3       | GND  | Ground                        |
| 4       | 4       | IN   | Digital Control Input         |
| 5       | 5       | V+   | Positive Supply Input         |

## Detailed Description

The MAX4715/MAX4716 are low on-resistance ( $R_{ON}$ ), low-voltage, single-pole/single-throw (SPST) analog switches that operate from a +1.6V to +3.6V single supply. The MAX4715 is normally open (NO), and the MAX4716 is normally closed (NC).

When powered from a +3V supply, their 0.4Ω  $R_{ON}$  allows high continuous currents to be switched in a variety of applications.

## Applications Information

### Logic Inputs

The MAX4715/MAX4716 logic inputs can be driven up to +3.6V regardless of the supply voltage. For example,

with a +3.3V supply, IN may be driven low to GND and high to +3.6V. Driving IN Rail-to-Rail® minimizes power consumption.

### Analog Signal Levels

Analog signals that range over the entire supply voltage ( $V_+$  to GND) can be passed with very little change in on-resistance (see the [Typical Operating Characteristics](#) section). The switches are bidirectional, so the NO, NC, and COM pins can be used as either inputs or outputs.

*Rail-to-Rail is a registered trademark of Nippon Motorola Ltd.*

## Test Circuits/Timing Diagrams

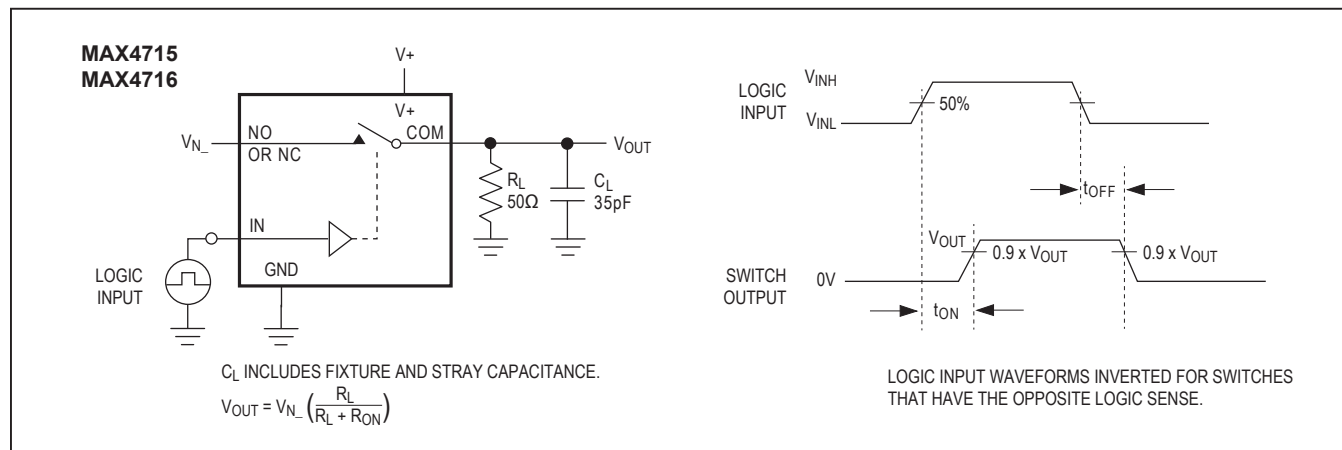


Figure 1. Switching Time

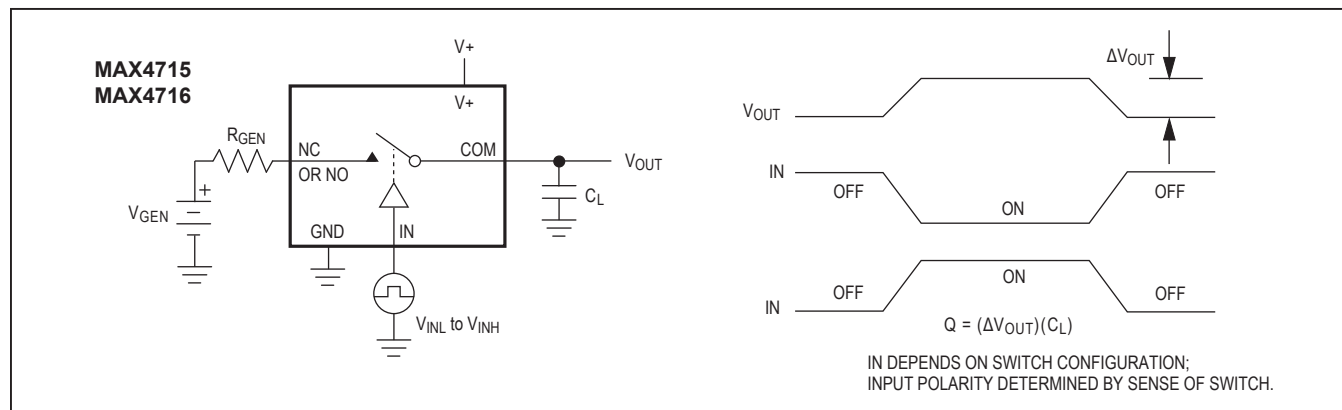


Figure 2. Charge Injection

Test Circuits/Timing Diagrams
(continued)

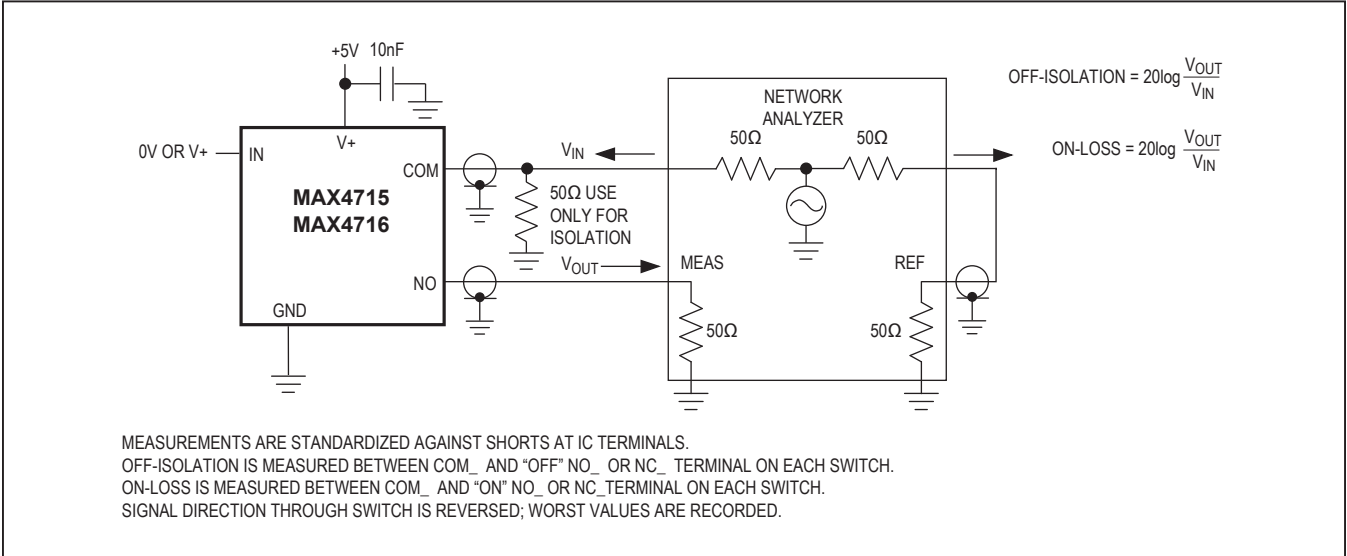


Figure 3. On-Loss and Off-Isolation

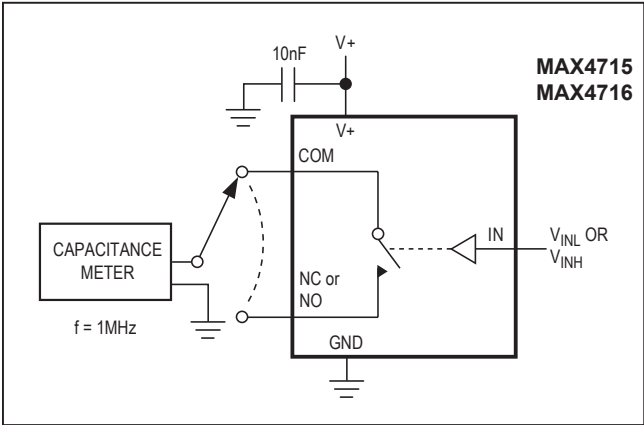


Figure 4. Channel Off/On-Capacitance

Ordering Information

| PART         | TEMP. RANGE    | PIN-PACKAGE | TOP MARK |
|--------------|----------------|-------------|----------|
| MAX4715EXK+T | -40°C to +85°C | 5 SC70-5    | ACJ      |
| MAX4716EXK+T | -40°C to +85°C | 5 SC70-5    | ACK      |

+ Denotes a lead(Pb)-free/RoHS-compliant package.  
T = Tape and reel.

Chip Information

TRANSISTOR COUNT: 135  
PROCESS: CMOS



## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                   | PAGES<br>CHANGED |
|--------------------|------------------|-----------------------------------------------|------------------|
| 0                  | 4/01             | Initial release                               | —                |
| 1                  | 3/20             | Updated the <i>Ordering Information</i> table | 8                |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9