


LOC	DIST	REVISIONS				
AJ	00	P	LTR	DESCRIPTION	DATE	DWN
		B		REV PER ECO 07-027463	17DEC2007	JL

1. SEE INSTRUCTION SHEET
408-4714

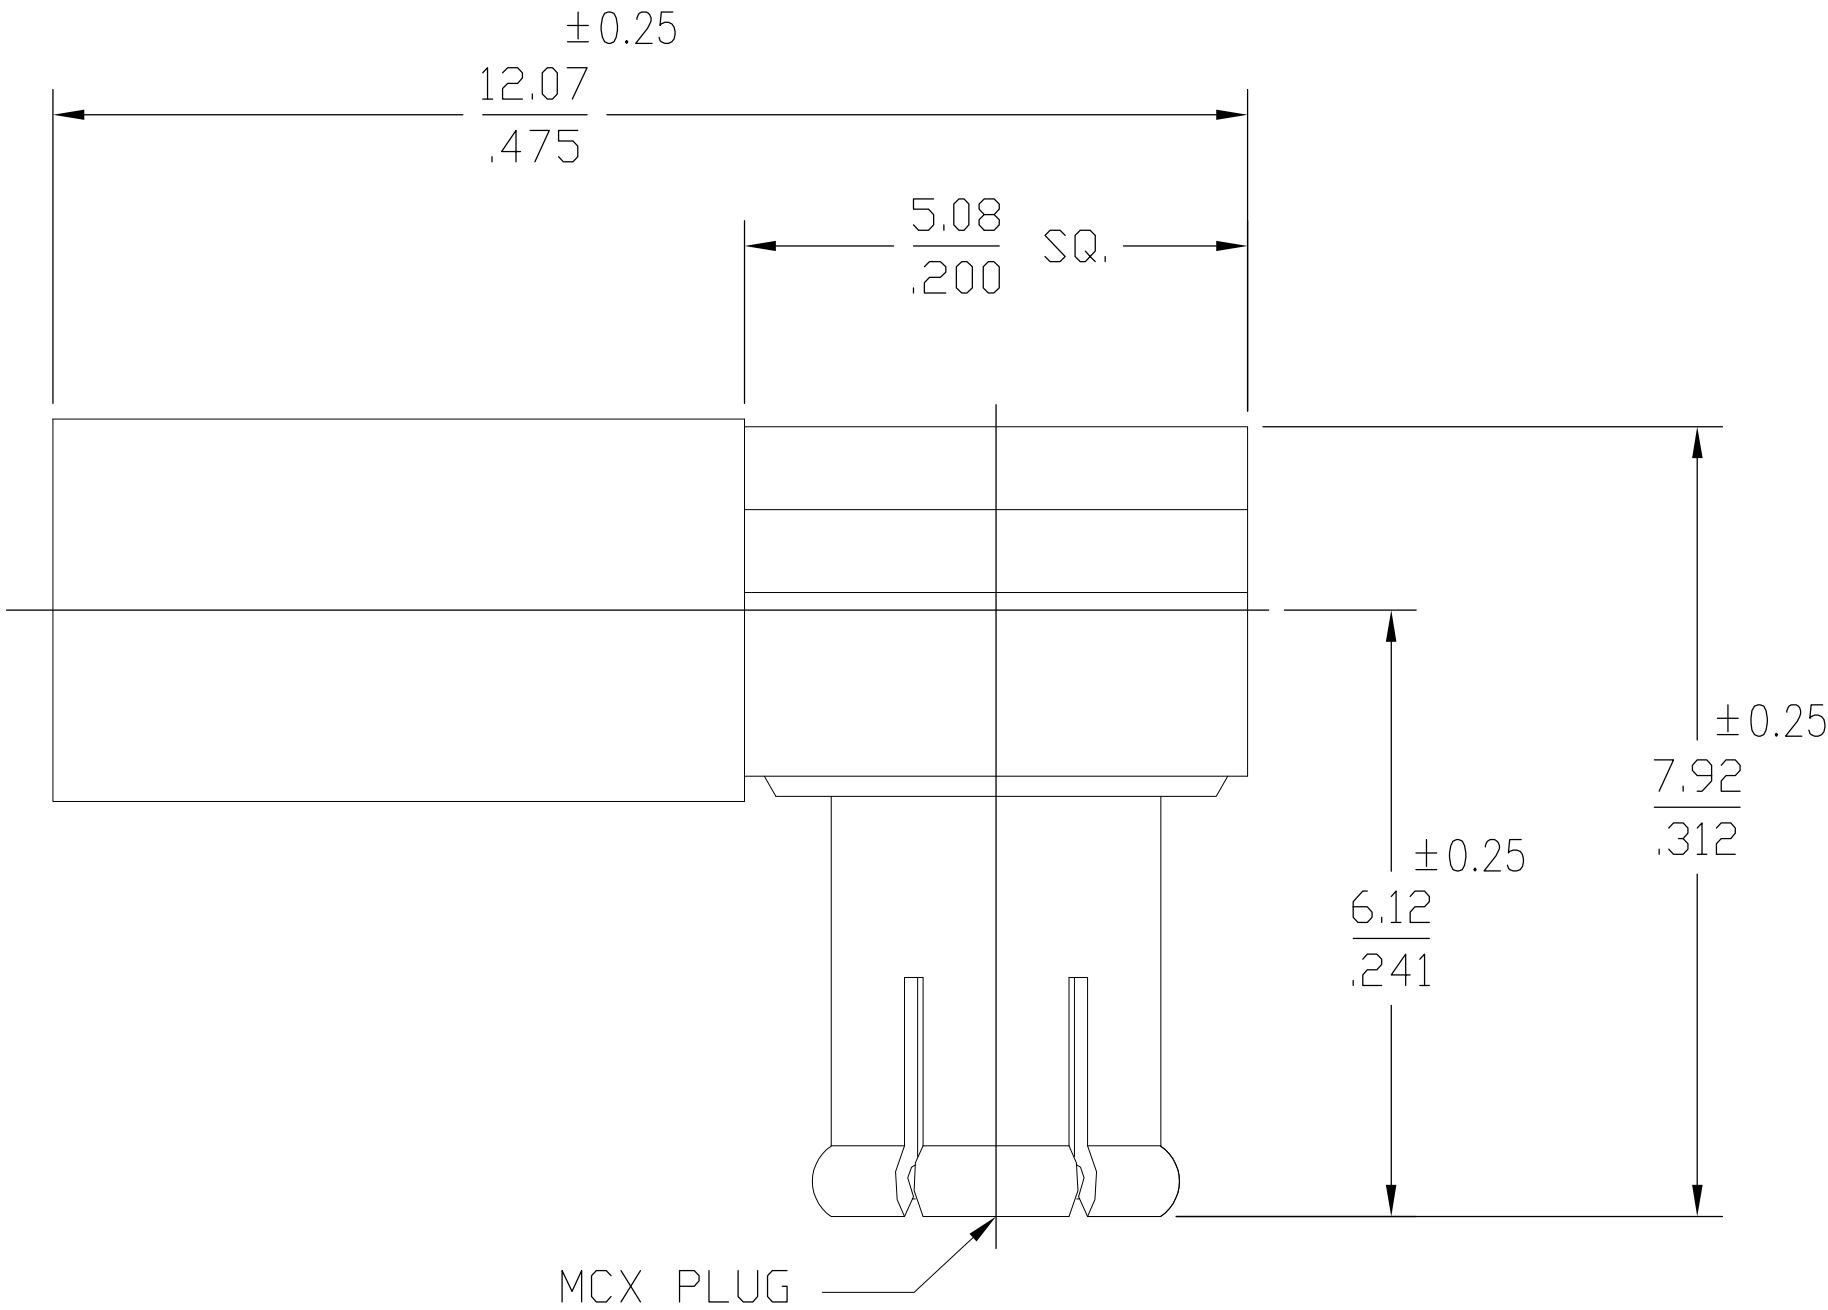

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Force to Engage (lbs MAX) 3.4 (1.1 TYP)	TEMPERATURE RATING -65° TO +165°C
Frequency Range (GHz) DC to 6	& Disengage (lbs) 1.77 MIN 4.5 MAX	Vibration MIL-STD-202, Method 204, Condition B
Volt Rating (VRMS MAX) @ Sea Level 335	Center Contact Captivation Designed to Maintain MCX Interface When Mating	Thermal Shock MIL-STD-202, Method 102, Condition B
VSWR 1.25 MAX @ 4 GHz		Moisture Resistance MIL-STD-202, Method 106D,10 Cycles, 96 Hours
1.35 MAX @ 6 GHz		Corrosion - MIL-STD-202, Method 101, Condition B
Insertion Loss .1dB MAX/1000 MHz		
Corona, 70,000 Ft (VRMS MIN) 250		
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000		
Contact Resistance (Milliohms MAX) Center Contact 5.0		
Outer Contact 1.0		
Cable to Housing 1.0		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670		
I.R.(Megohms MIN) 10,000		

1060604-1
PART NUMBER

DESIGNED FOR USE WITH RD 316/U FLEX CABLE DOUBLE BRAIDED	
CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.024 SLOT
HOUSING	.067
FERRULE	.137

XX.X = mm
.XXX = in

HOUSING CAP CENTER CONTACT	BRASS PER QQ-B-626 COMP. 360	NICKEL PLATE PER QQ-N-290
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CONTACT FINGERS	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAX	NICKEL PLATE PER QQ-N-290
COMPONENT	MATERIAL	FINISH
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.12 .005 3 PLC ± - 4 PLC ± - ANGLES ± 1°	DWN TMD 1/16/95 CHK - APVD - PRODUCT SPEC - APPLICATION SPEC - WEIGHT -
MATERIAL -	FINISH -	SCALE 1:1
CUSTOMER DRAWING		SHEET 1 OF 1
Tyco Electronics Corporation Harrisburg, PA 17105-3608		REV B
MCX RIGHT ANGLE CABLE PLUG- CRIMP ATTACHMENT (5837-5010-10)		
SIZE A2 CAGE CODE 00779 DRAWING NO C=1060904-1		
RESTRICTED TO -		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9