






Single-Ended Cordsets

#16 AWG yellow ST00W cable – U.S. color code

Oil-resistant PVC jacket

Low-resistance contact design with gold/palladium nickel plating

	9P	10P	12P
FEMALE FACE VIEW			
COLOR CODE	1- orange 2- blue 3- red-black trace 4- green-black trace 5- white 6- red 7- green-gnd 8- white-black trace 9- black	1- orange 2- blue 3- white-black trace 4- red-black trace 5- green-black trace 6- orange-black trace 7- red 8- green-gnd 9- black 10- white	1- orange 2- blue 3- white-black trace 4- red-black trace 5- green-black trace 6- orange-black trace 7- blue-black trace 8- black-white trace 9- green-gnd 10- red 11- white 12- black
VOLTAGE	600V AC/DC	600V AC/DC	600V AC/DC
CURRENT	7A	7A	5A
CONDUCTOR	#16-9	#16-10	#16-12

FEMALE	FIG	SINGLE-ENDED CORDSETS WITH #16 AWG ST00W CABLE 3 FEET LONG		
STRAIGHT	1	309000A01F030	301000A01F030	302000A01F030
90°	2	309001A01F030	301001A01F030	302001A01F030
MATING RECEPTACLE*	5	3R9006A20A120	3R1006A20A120	3R2006A20A120
MALE	FIG	SINGLE-ENDED CORDSETS WITH #16 AWG ST00W CABLE 3 FEET LONG		
STRAIGHT	3	309002A01F030	301002A01F030	302002A01F030
90°	4	309003A01F030	301003A01F030	302003A01F030
MATING RECEPTACLE*	5	3R9004A20A120	3R1004A20A120	3R2004A20A120

CATALOG OPTIONS

*See Page 82 for additional Mating Receptacles

Use the following chart to modify your part's specifications

309000A01F0301

CABLE LENGTH

6'	060
12'	120
20'	200

COUPLING NUT

STAINLESS STEELADD 1

Specifications

CONNECTOR DIMENSIONS

FEMALE STRAIGHT

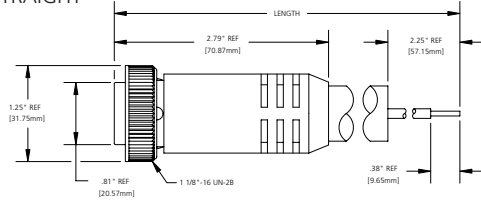


FIG 1

FEMALE 90°


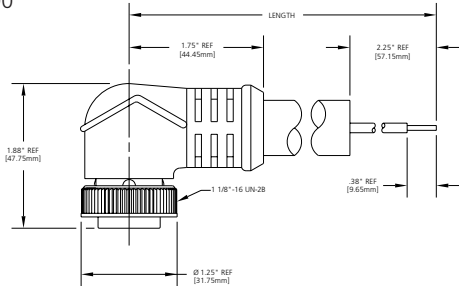


FIG 2

FEMALE CONNECTORS - FACE VIEWS

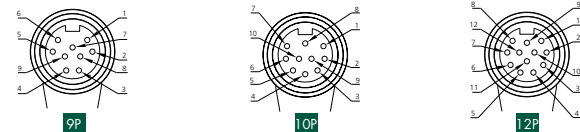

MALE STRAIGHT

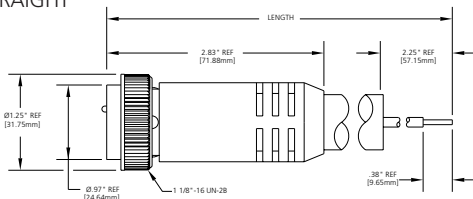


FIG 3

MALE 90°


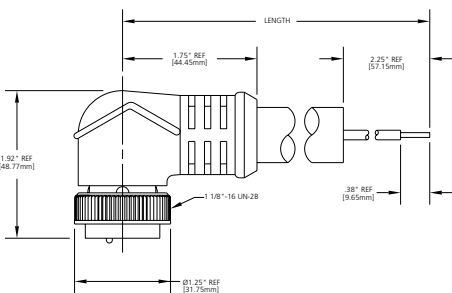


FIG 4

MALE CONNECTORS - FACE VIEWS

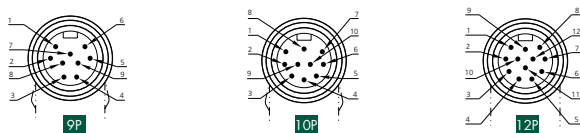

MECHANICAL
CONNECTOR FACE:
MOLDED BODY:
COUPLING NUT:

PVC - UL STD 94 - V0
PVC - UL STD 94 - V0
ZINC DIECAST W/ BLACK EPOXY
COAT, OPTIONAL STAINLESS STEEL
TYPE 303

CABLE:
YELLOW, #16 AWG, PVC JACKET &
PVC CONDUCTOR INSULATION
OVER 65 X #34 COPPER STRANDING,
600V, UL STYLE ST00W CSA ST

OUTSIDE DIAMETER:
9P - .64" (16.3mm)
10P - .66" (16.8mm)
12P - .71" (18.0mm)

ELECTRICAL
VOLTAGE RATING: 600 V AC/DC
AMPERAGE:
9P - 7A
10P - 7A
12P - 5A


ENVIRONMENTAL
PROTECTION: IP 68, NEMA 6P
AMBIENT OPERATING TEMP:
-4° to 221° F (-20° to 105° C)

CERTIFICATIONS
UL: UL RECOGNIZED, File No. E46237
CSA: CSA CERTIFIED, File No. LR6837

RECEPTACLE DIMENSIONS


MALE STRAIGHT WITH 1/2" - 14NPT THREADS
FEMALE STRAIGHT WITH 1/2" - 14NPT THREADS

SEE PAGE 82 FOR
ADDITIONAL
RECEPTACES

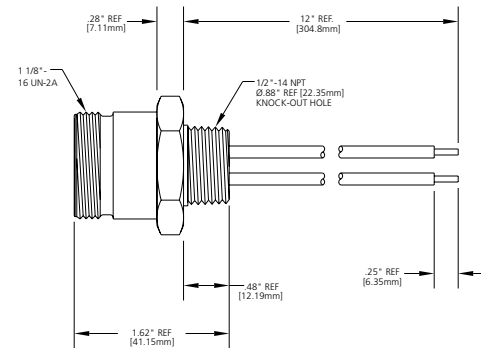

—— TYPICAL FACE VIEW —— TYPICAL KNOCK OUT ——

1.25" REF
[31.75mm]



.88" REF
[22.2mm]





FIG 5

MALE RECEPTACES - FACE VIEWS

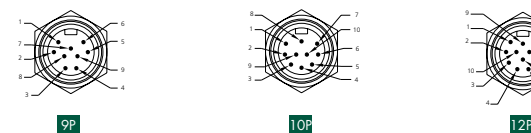

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9