


Dualband WLAN Ceramic Chip Antenna

Ground cleared under antenna 11.60 x 6.00 mm. Pulse Part Number: W3006

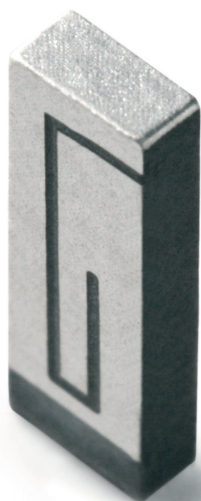

Features

- Omnidirectional radiation
- Low profile
- Compact size WxLxH (10.0 x 3.2 x 1.5 mm)
- Low weight (240 mg)
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product
- Single feed point

Applications

- IEEE 802.11a/b/g
- 5 GHz WLAN
- 2.4 GHz WLAN
- 2.4 GHz ISM Band Systems
- ZigBee IEEE 802.15.4

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

Dualband WLAN

Typical performance (testboard size 80 x 37 mm, PWB ground clearance area 11.60 x 6.00 mm)

1.5nH shunt inductor used for impedance matching.

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
2400–2483.5	3.2 (peak) 2.7 (band edges)	70 / -1.55 (peak) 65 / -1.85 (band edges)	-8	50	-40 to +85
5150–5850	4.2 (peak) 3.0 (band edges)	80 / -0.95 (peak) 70 / -1.55 (band edges)	-10	50	-40 to +85

Pulse Finland Oy


Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas



Dualband WLAN Ceramic Chip Antenna

Ground cleared under antenna 11.60 x 6.00 mm. Pulse Part Number: W3006

**Recommended test board layout for electrical characteristic measurement,
test board outline size 80 x 37mm**

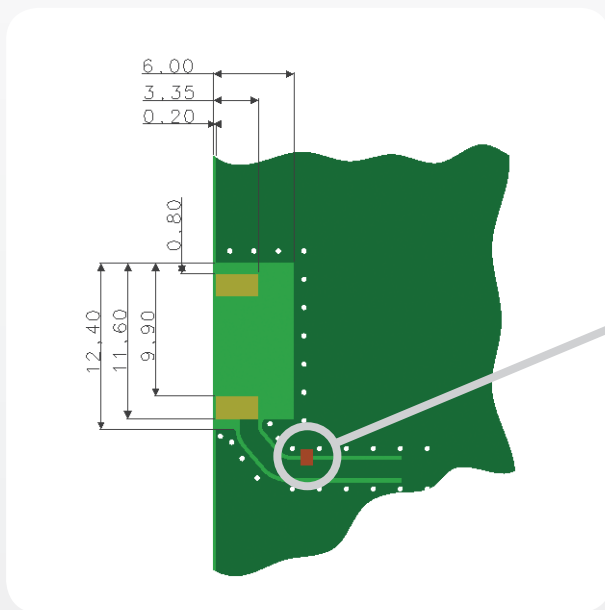

Shunt matching inductor,
1.5nH with presented setup.
Exact inductor value depends
on specific application.

Feed line should be designed to match 50 Ω characteristic impedance, depending on PWB material and thickness.

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

www.pulseeng.com/antennas

 **Pulse**
A TECHNITROL COMPANY



© 2007. All Rights Reserved.

Dualband WLAN Ceramic Chip Antenna



Ground cleared under antenna 11.60 x 6.00 mm. Pulse Part Number: W3006

Typical Electrical Characteristics (T=25 °C)

2,4 GHz Typical Return Loss S11/ impedance, measured on the test board

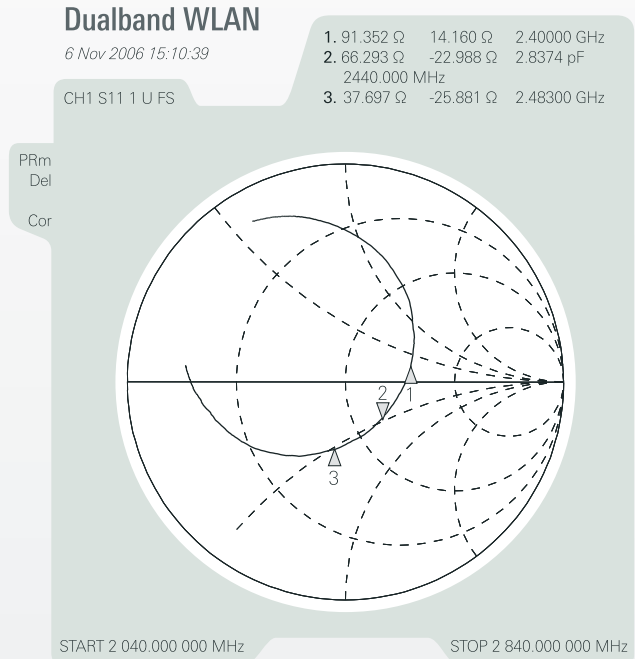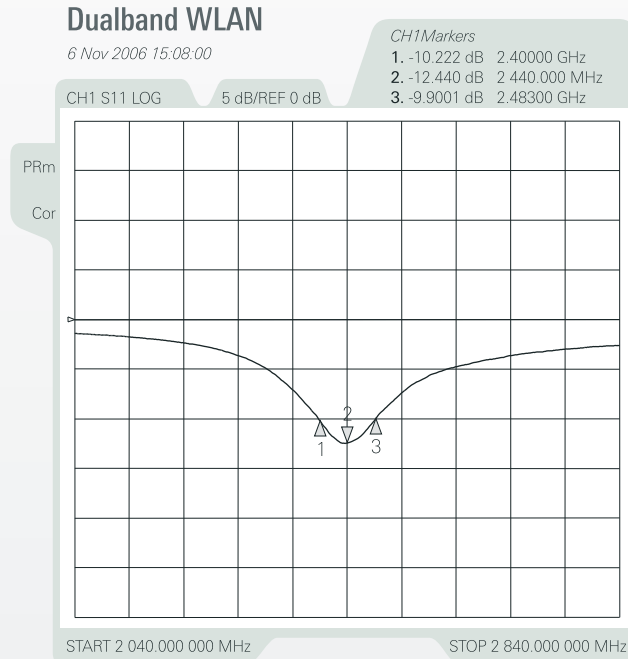

5GHz Typical Return Loss S11/ impedance, measured on the test board

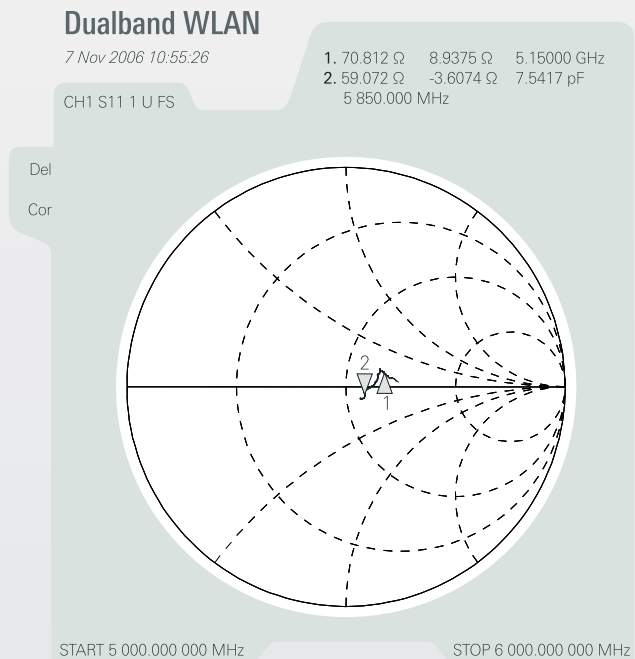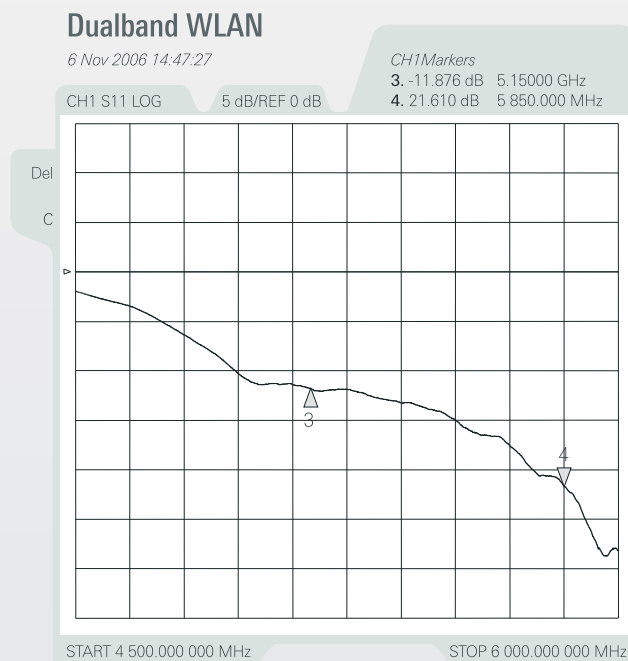

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas

Dualband WLAN Ceramic Chip Antenna


Ground cleared under antenna 11.60 x 6.00 mm. Pulse Part Number: W3006

2,4 GHz free space efficiency and maximum gain

DualBand WiFi 2.4G 10 x 3.2 x 1.5 mm




DualBand WiFi 2.4G 10 x 3.2 x 1.5 mm

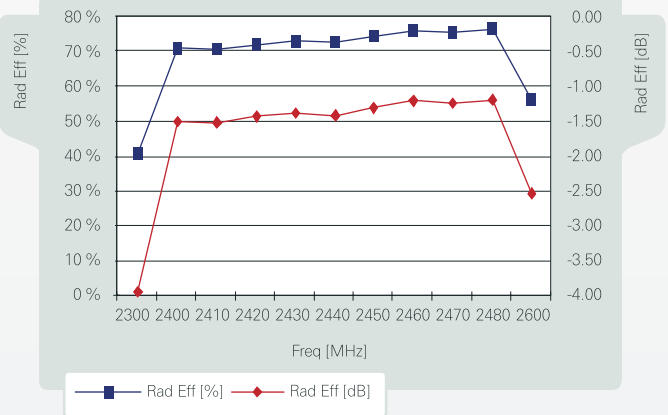


5 GHz free space efficiency and maximum gain

DualBand WiFi 5G 10 x 3.2 x 1.5 mm

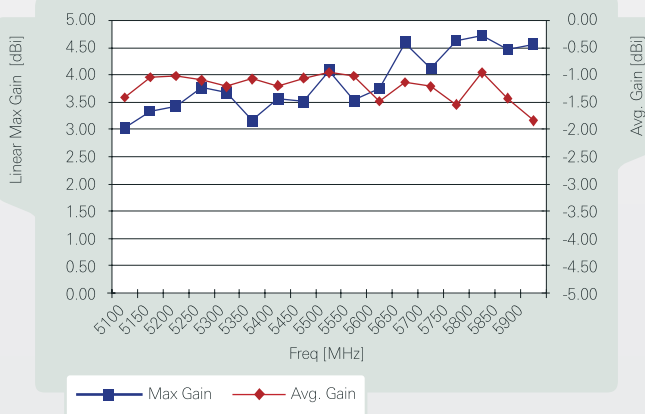

DualBand WiFi 5G 10 x 3.2 x 1.5 mm

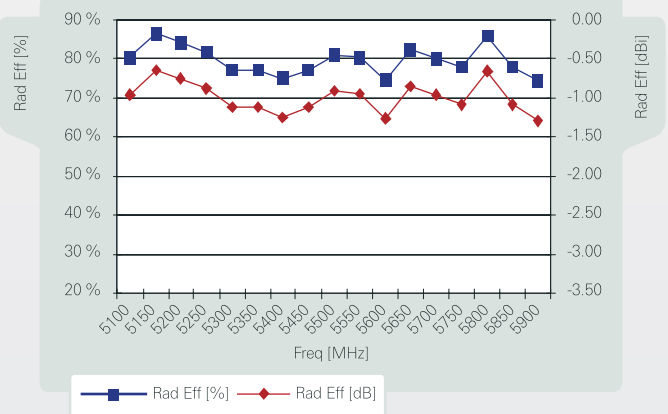

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas







© 2007. All Rights Reserved.

Dualband WLAN Ceramic Chip Antenna

Ground cleared under antenna 11.60 x 6.00 mm. Pulse Part Number: W3006

2,4 GHz Typical Free space Radiation Patterns

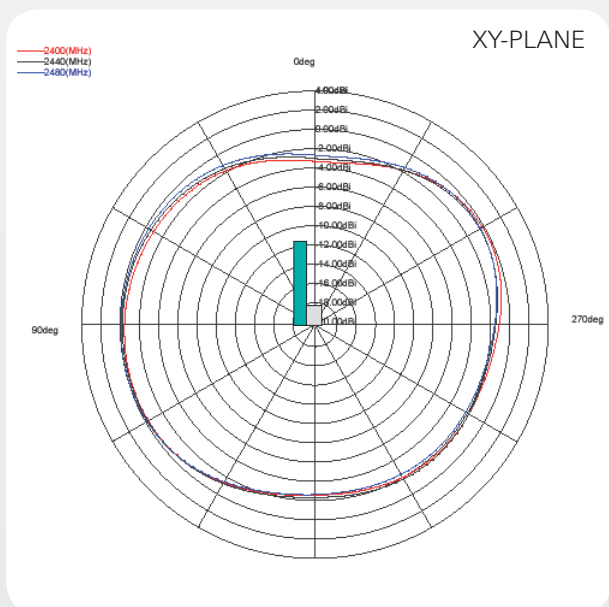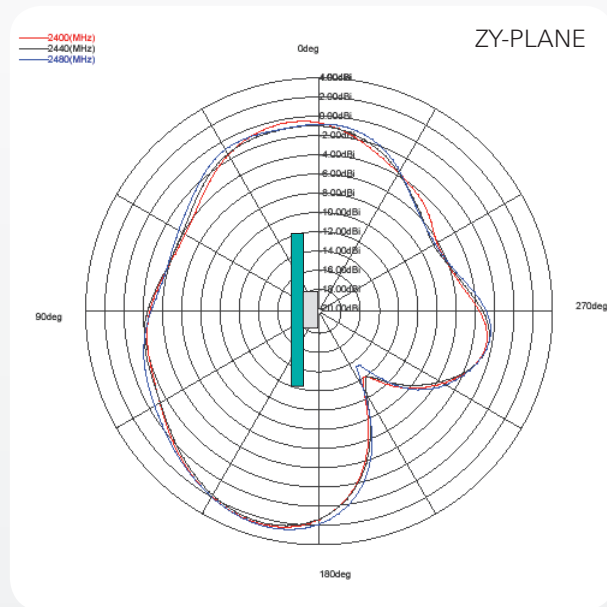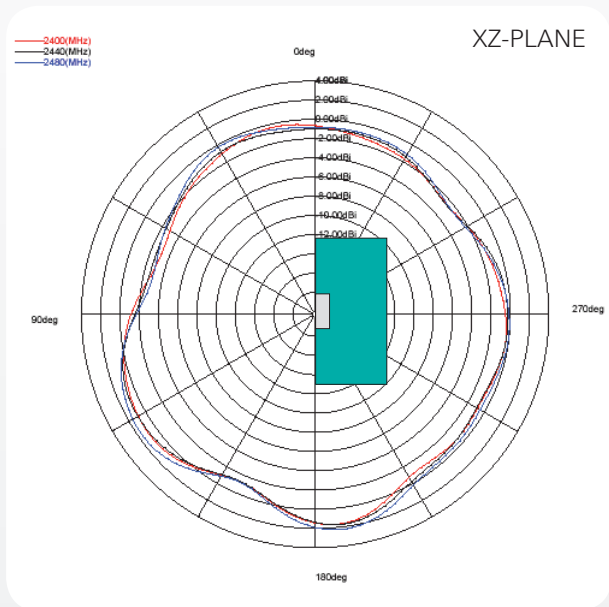

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas





 **Pulse**
A TECHNITROL COMPANY

© 2007. All Rights Reserved.

Dualband WLAN Ceramic Chip Antenna

Ground cleared under antenna 11.60 x 6.00 mm. Pulse Part Number: W3006

5 GHz Typical Free space Radiation Patterns

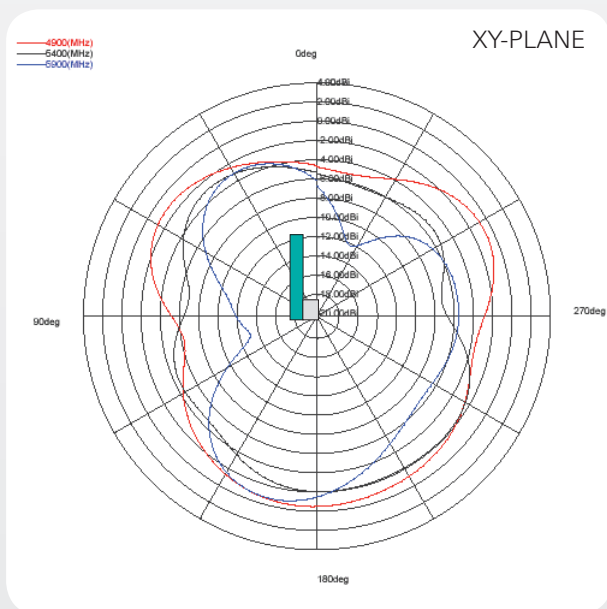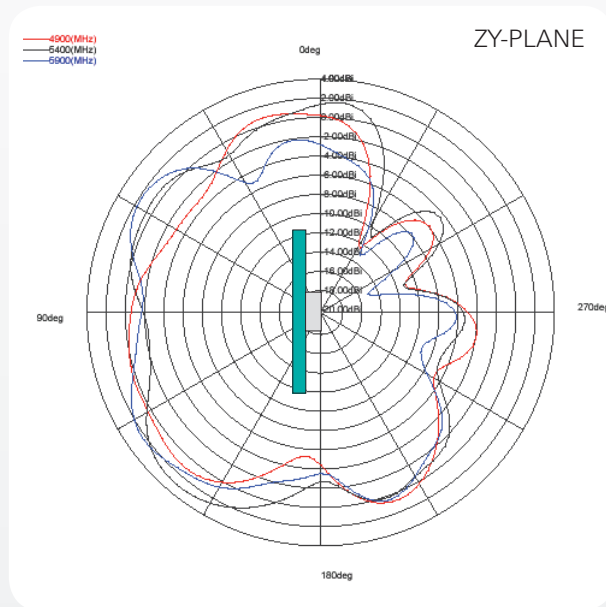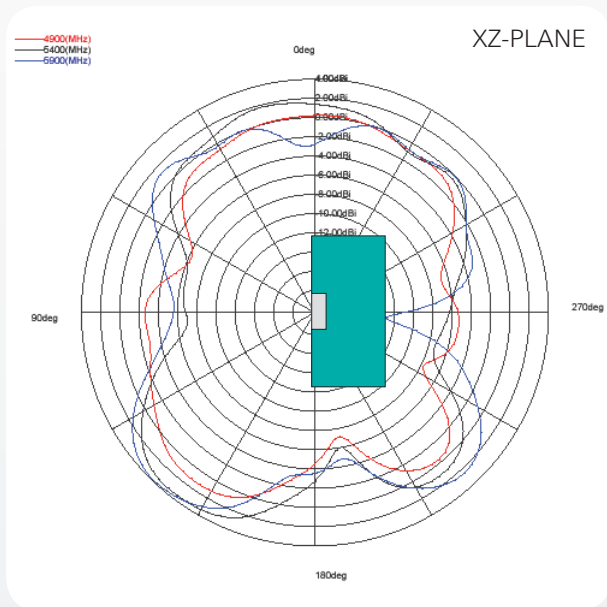

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas



© 2007. All Rights Reserved.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9