

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0758360104

Status:

Active

Overview:

gbx_backplane_connector_system

Description:

1.85mm by 1.85mm (.073 by .073") Pitch 3-Pair GbX® Backplane Connector System, Open Header, 60 Circuits, Lead Free, Pin Length 4.55mm (.179")

Documents:

Drawing (PDF)

Packaging Specification (PDF)

Product Specification PS-75221-999 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Application Tooling Documents

Comments

Component Type

Overview

Product Name

Style

Backplane Connectors

75836

Backplane

Tooling Manual

Open Header

PCB Header

gbx_backplane_connector_system

GbX®

N/A

Physical

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Guide to Mating Part

Keying to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Columns

Number of Pairs

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

60

60

Black

200

No

94V-0

No

None

High Performance Alloy (HPA)

Gold

Tin

High Temperature Thermoplastic

10

3

6

Vertical

0.087 In

2.20 mm

No

Yes

0.063 In

1.60 mm

Tube

0.073 In

1.85 mm


0.073 In

1.85 mm

30

0.76

30

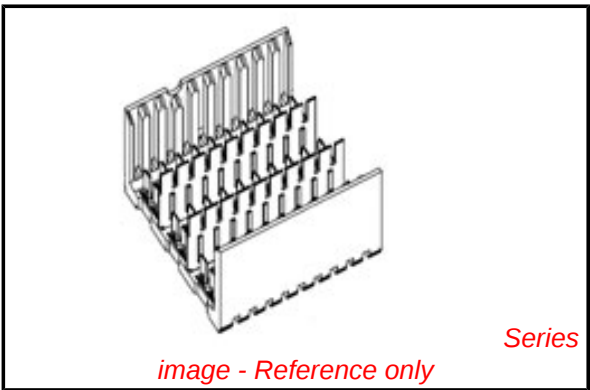

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75836Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

GbX® 3 Pair by 10

0622022510

Wide Differential

Insertion Tool

Plating min: Termination (μm)	0.76
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	8.0 Gbps
Real Signals (per 25mm)	82
Shield Type	Ground Plane Shield
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Material Info



Reference - Drawing Numbers

Packaging Specification	PK-70873-576
Product Specification	PS-75221-999
Sales Drawing	SD-75836-010

GbX is a registered trademark of Amphenol Corporation.

This document was generated on 05/14/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

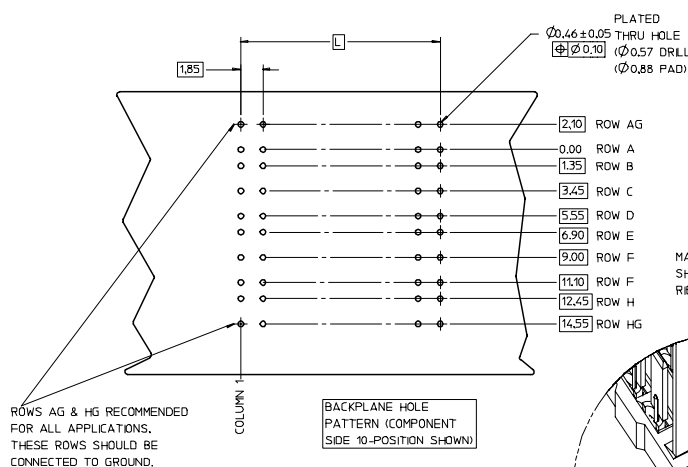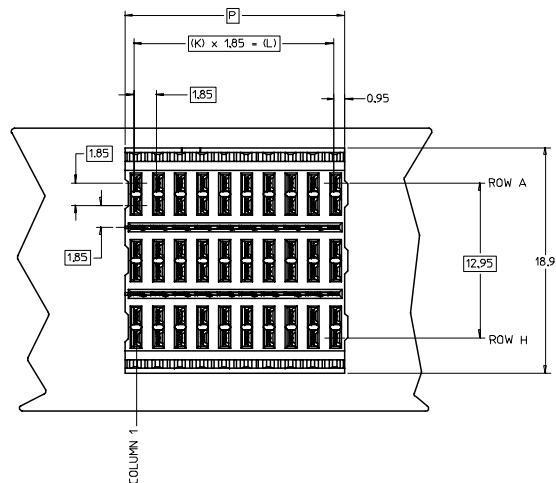

PLATED
Ø0.46±0.05 THRU HOLE
(Ø0.57 DRILL)
(Ø0.88 PAD)


2.10 ROW AG
0.00 ROW A
1.35 ROW B
3.45 ROW C
5.55 ROW D
6.90 ROW E
9.00 ROW F
11.10 ROW G
12.45 ROW H
14.55 ROW HG

MATING SIDE OF
SHIELD (OPPOSITE
RIB SIDE OF CONTACT)





MATING SIDE
OF SIGNAL
(RIB SIDE
OF CONTACT)

DETAIL
SCALE 10:1

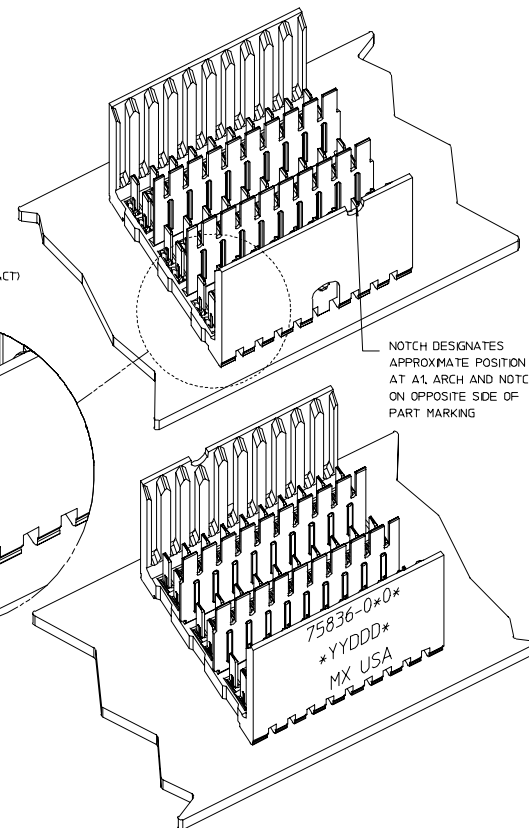

NOTCH DESIGNATES
APPROXIMATE POSITION
AT A1, ARCH AND NOTCH
ON OPPOSITE SIDE OF
PART MARKING

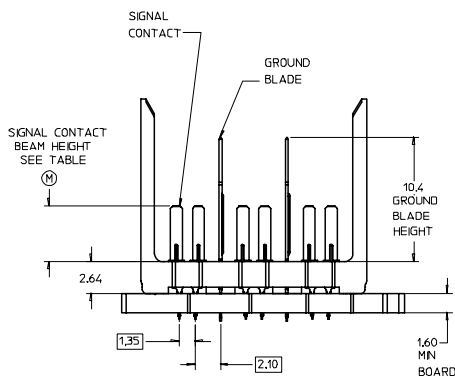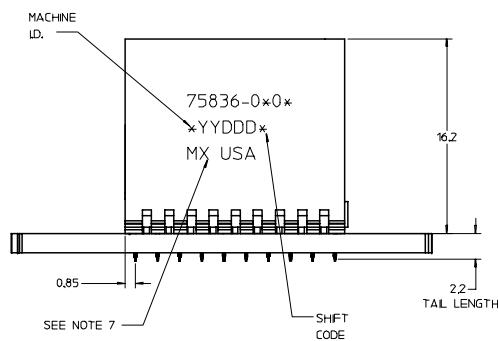

LEAD-FREE
PLATING ON
SIGNALS & GROUNDS.

- NOTES:
1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0, COLOR - GRAY. SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
 2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA. SELECTIVE MATTE TIN (Sn) ON PCB TAILS. NICKEL (Ni) OVERALL.
 3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
 4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
 5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
 6. PACKAGE PER PK-70873-576.
 7. EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE A LABEL ON THE TUBE.

PART NUMBER TABLE			
ASSY PART NO.	K	L	P
75836-010*	9	16.65	18.35
75836-020*	24	44.40	46.10
75836-050*	4	7.40	9.10

COLUMN
01 - 10 COL
02 - 25 COL
05 - 5 COL

KEYING
ORIENTATION
OPEN = 0 (NONE)

PN LENGTH
DM "M"
3=3.55 mm
4=4.55 mm
5=5.55 mm

REVISED EC NO: UCP2006-2458 DRWN: JBINGHAM 2006/04/20 CHKD: 2006/04/20 APPR: CBXLER 2006/04/20	DESCRIPTION	QUALITY SYMBOLS ▽ 0 ▽ 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
			mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± ---°	DIMENSION STYLE MM ONLY		TITLE GBX 3-PAIR OPEN END BACKPLANE ASSEMBLY LEAD-FREE SALES DRAWING			
REVISED EC NO: UCP2006-2458 DRWN: JBINGHAM 2006/04/20 CHKD: 2006/04/20 APPR: CBXLER 2006/04/20	DESCRIPTION	QUALITY SYMBOLS ▽ 0 ▽ 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY CTHOMAS	DATE 2006/01/13	 MOLEX INCORPORATED		
			DRAFT WHERE APPLICABLE		CHECKED BY KMULVEY	DATE 2006/01/16			
REVISED EC NO: UCP2006-2458 DRWN: JBINGHAM 2006/04/20 CHKD: 2006/04/20 APPR: CBXLER 2006/04/20	DESCRIPTION	QUALITY SYMBOLS ▽ 0 ▽ 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVED BY JBINGHAM	DATE 2006/01/17	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-75836-010	SHEET NO. 1 OF 1
			MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9