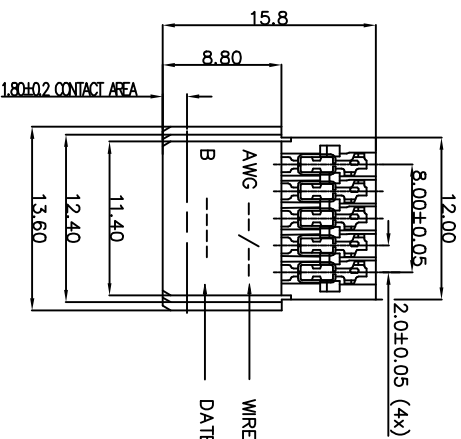
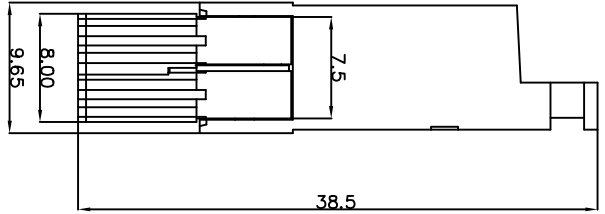
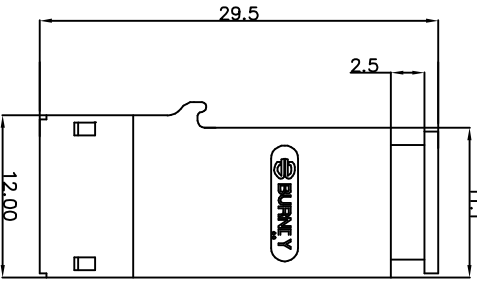




NOTE:

PERFORMANCE CHARACTERISTICS:

VOLTAGE RATING : 250 VAC
CURRENT RATING : 1.0 A AT 70°C
INSULATION RESISTANCE: 10 MΩ Min. AFTER TEST
DIELECTRIC WITHSTANDING VOLTAGE: 1000V
CONTACT RESISTANCE: 20 mΩ Max. AFTER TEST
OPERATING T° : -55°C TO +125°C
INSERTION FORCE: 0.75N Max. PER CONTACT
WITHDRAWAL FORCE: 0.15N Min. PER CONTACT

MATERIALS:

TERMINAL BLOCK : GLASS REINFORCED THERMOPLASTIC UL 94-V0.
COVER : POLYAMIDE-NYLON.
CONTACTS : PHOSPHOR BRONZE.
PLATING : Z1 : 0.40 μ Au MIN. OVER Ni IN CONTACT AREA;
N9 : 0.75 μ Au MIN. OVER Ni IN CONTACT AREA;
PURE Sn DN IDC-TERMINAL.
PURE Sn DN IDC-TERMINAL.
EB : 2.00 μ Au MIN. OVER Ni IN CONTACT AREA;
PURE Sn DN IDC-TERMINAL.

WIRE CHARACTERISTICS:

26/28/30AWG: INSULATION DIAMETER 1.20MM MAX.
24AWG SPECIAL: INSULATION DIAMETER 0.9 MM MAX.

PART NUMBERS:

HM2C01D0C010--LF CONNECTOR FOR WIRE SIZE AWG 28, AWG 30.
HM2C01D2C010--LF CONNECTOR FOR WIRE SIZE AWG 24, AWG 26.
AWG24 SPECIAL SEE WIRE CHARACTERISTICS

MARKING:

PARTNUMBER	WIRE SIZE MARKING
HM2C01D0C010--LF	AWG28/30
HM2C01D2C010--LF	AWG24/26

- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS

mat'l. code				surface		tolerance	projection	product family	
				ISO 1302	✓	ISO 406/ISO 110		Millipocs HPL560	
lfr	ecn no	dr	date	tolerances unless otherwise specified				title	
A	KN	13-09-01		0.0 ± 0.2		mm		4X5 Pos, HM2C01D-C010-LF	
B	D005-0491	Q	22-11-05	0.00 ± 0.1				NON-SHIELDED CABLE CONNECTOR WITH H00D	
C	ELX-W-28087	U	2017/02/13	0.0 ± 0.1				scale 4:1	
		dr	Laurence Zang	2017/02/13				dwg no	
		enq	Laurence Zang	2017/02/13				sheet of 1 size	
		chr	Nick Zhong	2017/02/13				A4	
		qppd	Tim Yao	2017/02/13				type	
								Product Customer Drawing	
sheet	revision		c						
index	sheet	1							

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9