
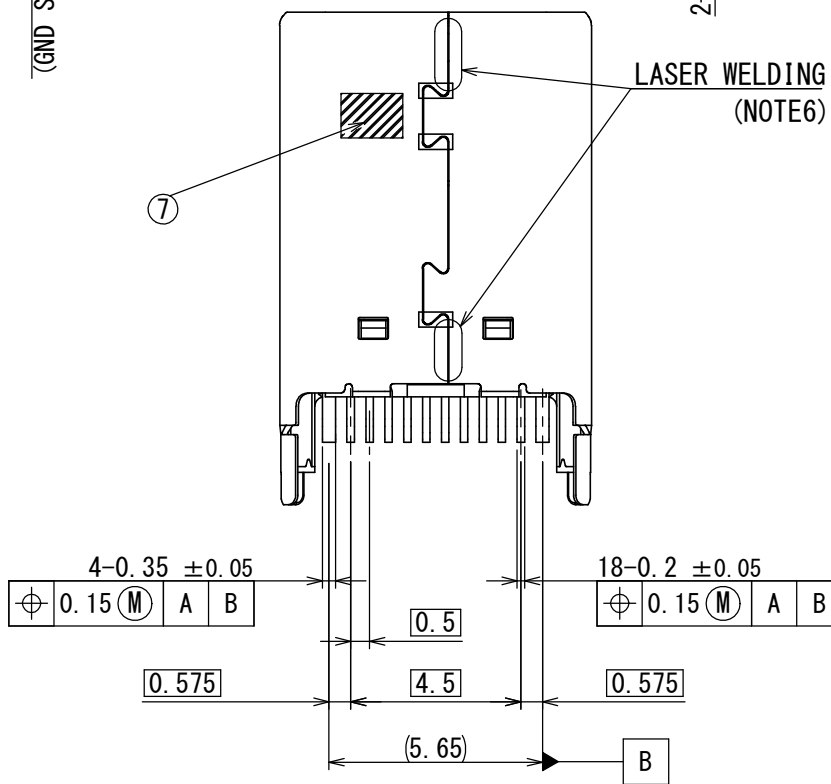
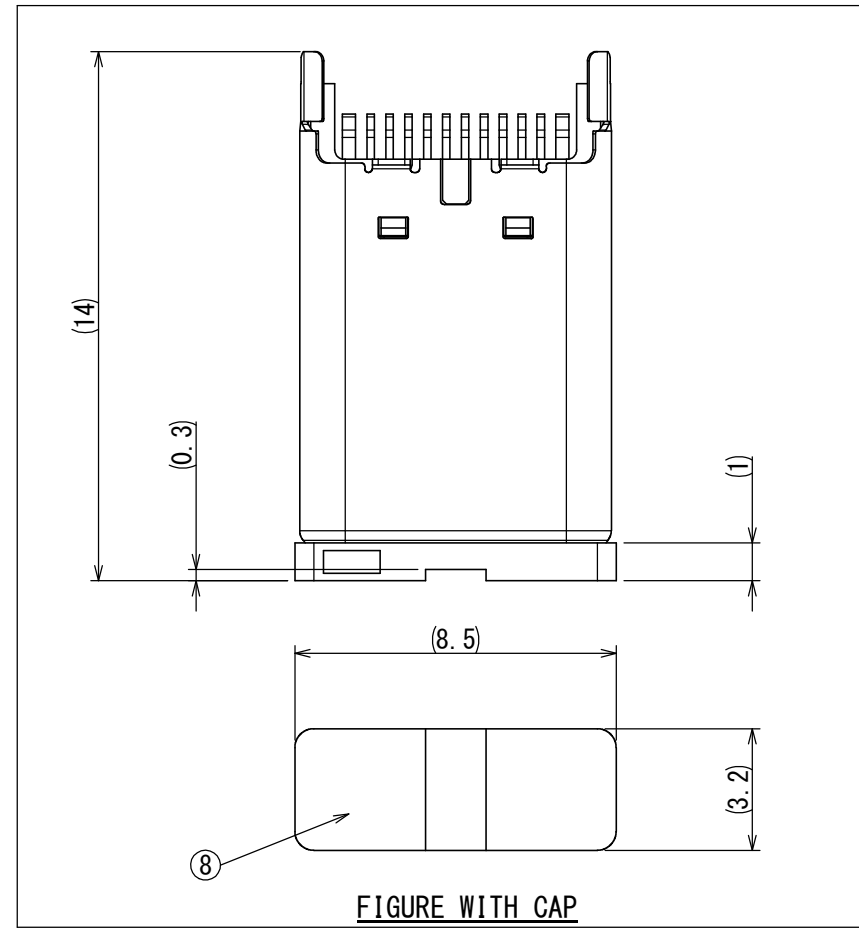
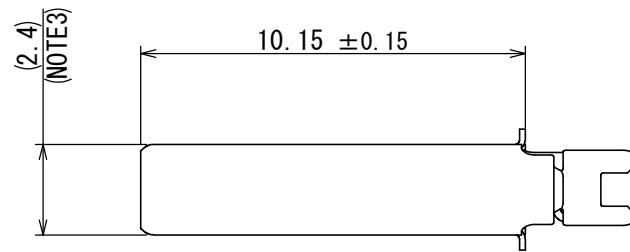
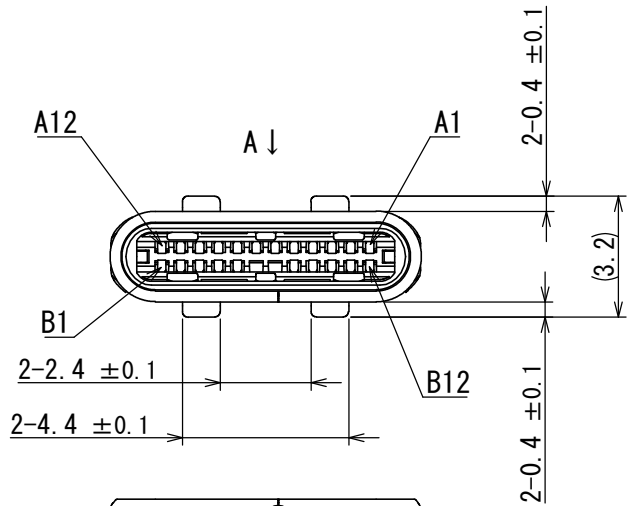
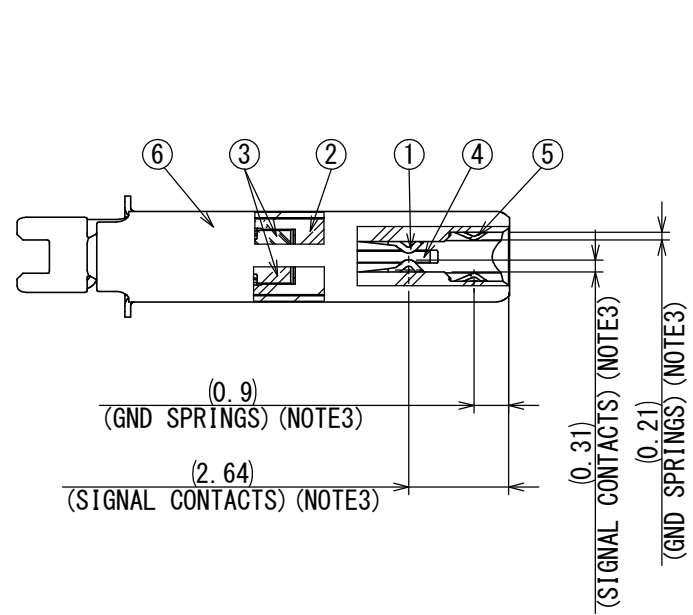
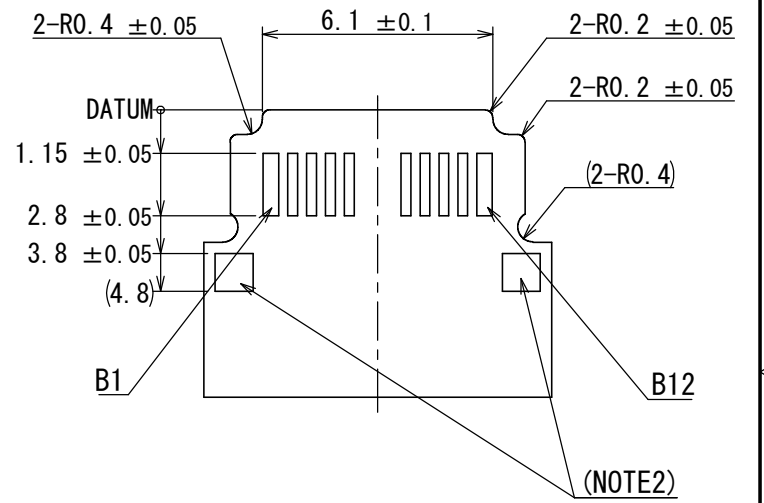
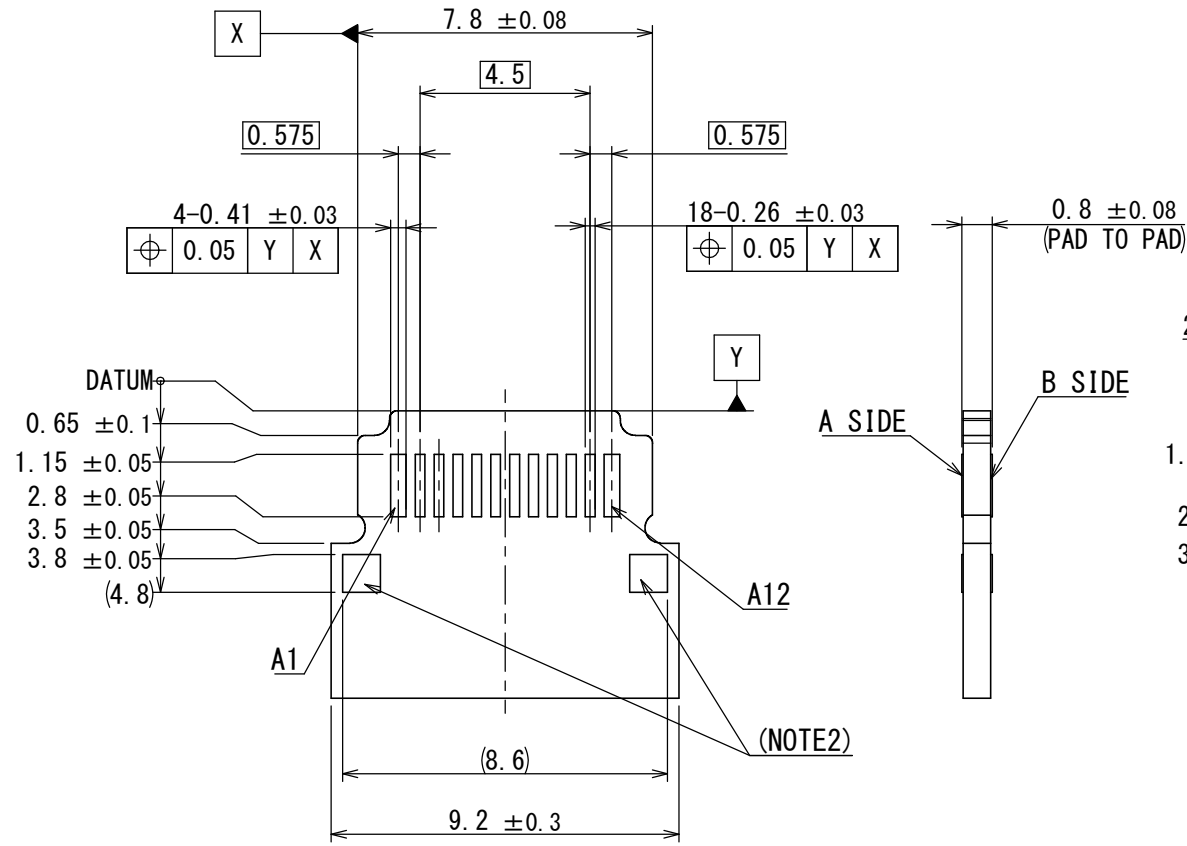
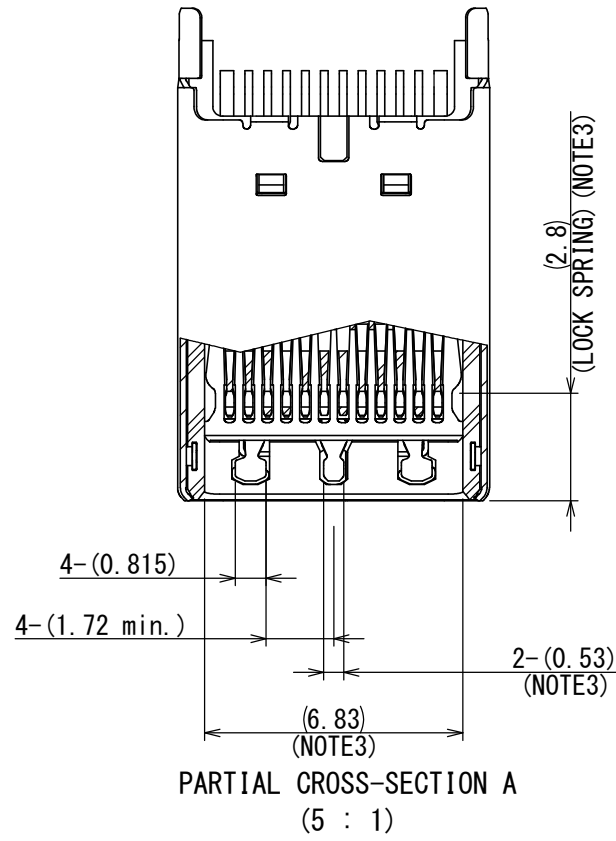


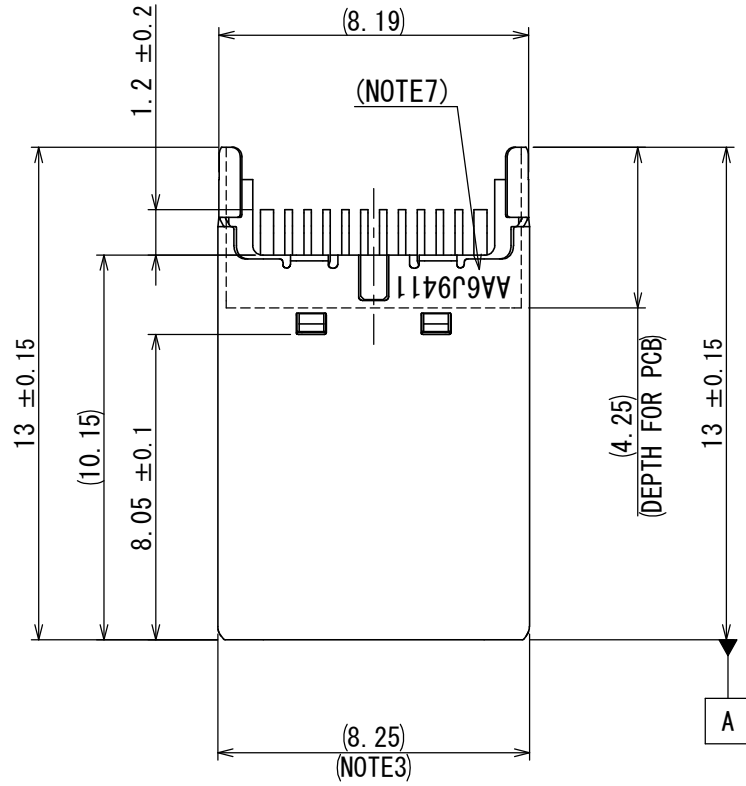

NOTE1. THERE COULD BE UNRECOGNIZABLE DIFFERENCES FROM ACTUAL PRODUCT DUE TO PROCESS CONVENIENCE BUT NOT IMPACT ON THE FUNCTION.
NOTE2. RECOMMEND TO UTILIZE THE SIDE SHELL TABS BY SOLDERING TO PCB PADS FOR THE MECHANICAL STRENGTH AND GND CONNECTION.
NOTE3. MATING DIMENSIONS CONSIST OF "Universal Serial Bus Type-C Cable and Connector Specification"
NOTE4. PIN ASSIGNMENT REFER TO TABLE-1 (REF.)
NOTE5. RECOMMEND TO KEEP THE CAP STAY IN PLACE UNTIL ALL THE PROCESSES DONE. THE CAP PREVENTS A CONNECTOR FROM DEFORMED AND CONTAMINATION DURING PROCESSES SUCH AS PADDLE CARD ASSEMBLY AND CABLE ASSEMBLY.
NOTE6. LASER WELD POINTS MAY BE DISCOLORED.

NOTE7. LOT NUMBER IS MARKED AS INDICATED.
【AUTOMATIC MACHINE ASSEMBLY】: WITH LOT NUMBER
【MANUAL JIG ASSEMBLY】: WITHOUT LOT NUMBER

(EX) AA6J9411
MODIFICATION MARK
VENDER ID
YEAR
MONTH
DAY
EQUIPMENT No.
(END OF ONE AT A.D.)
(JAN. TO SEP.: 1 TO 9, OCT.: 0, NOV.: X, DEC.: Y)
(NUMBER OR ALPHABET)
(NUMBER OR ALPHABET)

TABLE-1. PIN ASSIGNMENT (FRONT VIEW) (REF.)

Pin No.	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
	GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
Pin No.	B1	B2	B3	B4	B5			SBU2	Vbus	RX1-	RX1+	GND

8	CAP	1	HEAT RESISTING PLASTIC	(BLACK)	HALOGEN-FREE
7	TAPE	2	POLYIMIDE	-	HALOGEN-FREE
6	SHELL	1	STAINLESS STEEL	NICKEL PLATING	NICKEL: 0.5 μm MIN.
5	GROUND SPRING	2	STAINLESS STEEL	-	
4	LOCK SPRING	1	STAINLESS STEEL	-	
3	INSULATOR B	2	HEAT RESISTING PLASTIC	(BLACK)	HALOGEN-FREE
2	INSULATOR A	1	HEAT RESISTING PLASTIC	(BLACK)	HALOGEN-FREE
1	CONTACT	22	COPPER ALLOY	CONTACT AREA: GOLD OVER NICKEL SOLDER TAILS: GOLD FLASH OVER NICKEL	CONTACT AREA NICKEL : 1.0 μm MIN. GOLD : 0.1 μm MIN.

仕様書 (SPECIFICATION) JACS-30353 JAHL-30353-6	第1版 (ORIGINAL DATE) 26/MAR/2019	尺度 (SCALE) 5:1	シリーズ (SERIES) DX07	日本航空電子工業株式会社
一般公差 (GENERAL TOLERANCE)	製図 DR.	名称 (TITLE) DX07P022AA6	JAE CONNECTOR	
寸法 (DIMENSION) ±0.8 × ±0.4 × × ±0.1 × × × ±	担当 CHK Y. SAITOU	図面番号 (DRAWING NO.) SJ121220		
角度 (ANGLES) ×° ± ×°' ± 単位 (UNIT): mm	承認 APPD.	JAE JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.		
質量 (MASS)		図面番号 (DRAWING NO.) SJ121220		版数 (VER.) 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9