

## Aluminum Capacitors SMD (Chip), Very Low Z





Fig.1 Component outline



### FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte, self healing
- SMD-version with base plate, lead (Pb)-free reflow solderable
- Very low impedance, very high ripple current
- Very long useful life: 5000 hours at 105 °C for case size  $\geq 12.5 \times 12.5 \times 13$
- Standard 4 pin-version for diameter  $\geq 12.5$  mm
- 4 pin-version for diameter 10 mm on request
- Charge and discharge proof, no peak current limitation
- Lead (Pb)-free and RoHS compliant
- ATTENTION: for maximum safe soldering conditions refer to Fig. 4

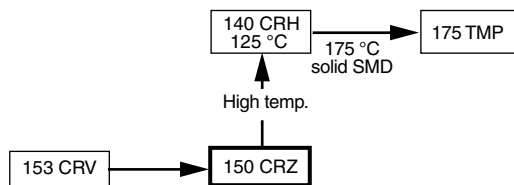

**RoHS**  
COMPLIANT

### APPLICATIONS

- SMD technology, for high mounting density
- Industrial and professional applications
- Automotive, general industrial
- Smoothing, filtering, buffering
- 4 pin-version for high vibration

### MARKING

- Rated capacitance (in  $\mu\text{F}$ )
- Rated voltage (in V)
- Date code, in accordance with IEC 60062
- Black mark or '-' sign indicating the cathode (the anode is identified by bevelled edges)
- Code indicating group number (Z)

### PACKAGING

Supplied in blister tape on reel

### QUICK REFERENCE DATA

| DESCRIPTION                                                                                                                                                                   | VALUE                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Nominal case sizes (L x W x H in mm)                                                                                                                                          | 8 x 8 x 10<br>to 12.5 x 12.5 x 16               |
| Rated capacitance range, $C_R$                                                                                                                                                | 33 to 2200 $\mu\text{F}$                        |
| Tolerance on $C_R$                                                                                                                                                            | $\pm 20 \%$                                     |
| Rated voltage range, $U_R$                                                                                                                                                    | 6.3 to 63 V                                     |
| Category temperature range                                                                                                                                                    | - 55 to + 105 °C                                |
| Endurance test at 105 °C:<br>case size $\leq 10 \times 10 \times 14$<br>case size $\geq 12.5 \times 12.5 \times 13$                                                           | 2000 hours<br>3000 hours                        |
| Useful life at 105 °C:<br>case size $\leq 10 \times 10 \times 10$<br>case size $10 \times 10 \times 14$<br>case size $\geq 12.5 \times 12.5 \times 13$                        | 2500 hours<br>3000 hours<br>5000 hours          |
| Useful life at 40 °C;<br>1.8 x $I_R$ applied:<br>case size $\leq 10 \times 10 \times 10$<br>case size $10 \times 10 \times 14$<br>case size $\geq 12.5 \times 12.5 \times 13$ | 125 000 hours<br>150 000 hours<br>250 000 hours |
| Shelf life at 0 V, 105 °C                                                                                                                                                     | 1000 hours                                      |
| Based on sectional specification                                                                                                                                              | IEC 60384-18/CECC32300                          |
| Climatic category IEC 60068                                                                                                                                                   | 55/105/56                                       |

### SELECTION CHART FOR $C_R$ , $U_R$ AND RELEVANT NOMINAL CASE SIZES (L x W x H in mm)

| $C_R$<br>( $\mu\text{F}$ ) | $U_R$ (V)        |                  |                  |                  |                  |              |                  |
|----------------------------|------------------|------------------|------------------|------------------|------------------|--------------|------------------|
|                            | 6.3              | 10               | 16               | 25               | 35               | 50           | 63               |
| 33                         | -                | -                | -                | -                | -                | -            | 8 x 8 x 10       |
| 47                         | -                | -                | -                | -                | -                | -            | 8 x 8 x 10       |
| 68                         | -                | -                | -                | -                | -                | -            | 10 x 10 x 10     |
| 100                        | -                | -                | -                | -                | -                | -            | 10 x 10 x 10     |
| 150                        | -                | -                | -                | -                | -                | -            | 10 x 10 x 14     |
| 220                        | -                | -                | -                | 8 x 8 x 10       | -                | -            | 12.5 x 12.5 x 13 |
| 330                        | -                | -                | 8 x 8 x 10       | 8 x 8 x 10       | 10 x 10 x 10     | 10 x 10 x 14 | 12.5 x 12.5 x 16 |
| 470                        | 8 x 8 x 10       | 8 x 8 x 10       | 10 x 10 x 10     | 10 x 10 x 14     | 12.5 x 12.5 x 13 | -            | -                |
| 680                        | -                | 10 x 10 x 10     | 10 x 10 x 14     | 12.5 x 12.5 x 13 | 12.5 x 12.5 x 16 | -            | -                |
| 1000                       | 10 x 10 x 10     | 10 x 10 x 14     | 12.5 x 12.5 x 13 | 12.5 x 12.5 x 16 | -                | -            | -                |
| 1500                       | -                | 12.5 x 12.5 x 13 | 12.5 x 12.5 x 16 | -                | -                | -            | -                |
| 2200                       | 12.5 x 12.5 x 13 | 12.5 x 12.5 x 16 | -                | -                | -                | -            | -                |

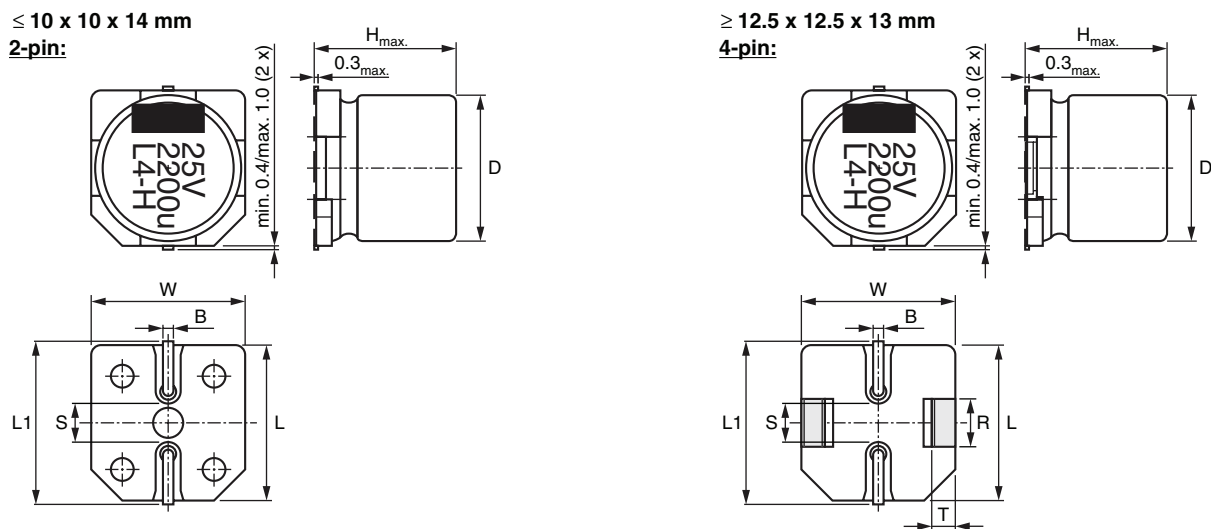


Fig.2 Dimensional Outline

Table 1

| DIMENSIONS in millimeters AND MASS |           |                   |                   |                   |      |                   |     |                    |         |         |          |
|------------------------------------|-----------|-------------------|-------------------|-------------------|------|-------------------|-----|--------------------|---------|---------|----------|
| NOMINAL CASE SIZE<br>L x W x H     | CASE CODE | L <sub>max.</sub> | W <sub>max.</sub> | H <sub>max.</sub> | Ø D  | B <sub>max.</sub> | S   | L1 <sub>max.</sub> | R ± 0.1 | T ± 0.1 | MASS (g) |
| 8 x 8 x 10                         | 0810      | 8.5               | 8.5               | 10.5              | 8.0  | 1.0               | 2.2 | 9.9                | -       | -       | ≈ 1.0    |
| 10 x 10 x 10                       | 1010      | 10.5              | 10.5              | 10.5              | 10.0 | 1.0               | 3.5 | 11.8               | -       | -       | ≈ 1.3    |
| 10 x 10 x 14                       | 1014      | 10.5              | 10.5              | 14.3              | 10.0 | 1.0               | 3.5 | 11.8               | -       | -       | ≈ 1.5    |
| 12.5 x 12.5 x 13                   | 1213      | 12.8              | 12.8              | 14.0              | 12.5 | 1.3               | 3.6 | 14.9               | 3.7     | 2.4     | ≈ 2.6    |
| 12.5 x 12.5 x 16                   | 1216      | 12.8              | 12.8              | 16.5              | 12.5 | 1.3               | 3.6 | 14.9               | 3.7     | 2.4     | ≈ 2.8    |

Table 2

| TAPE AND REEL DIMENSIONS in millimeters, PACKAGING QUANTITIES |           |                         |                 |                                  |               |                                |
|---------------------------------------------------------------|-----------|-------------------------|-----------------|----------------------------------|---------------|--------------------------------|
| NOMINAL CASE SIZE<br>L x W x H                                | CASE CODE | PITCH<br>P <sub>1</sub> | TAPE WIDTH<br>W | TAPE THICKNESS<br>T <sub>2</sub> | REEL DIAMETER | PACKAGING QUANTITY<br>PER REEL |
| 8 x 8 x 10                                                    | 0810      | 16                      | 24              | 11.3                             | 380           | 500                            |
| 10 x 10 x 10                                                  | 1010      | 16                      | 24              | 11.3                             | 380           | 500                            |
| 10 x 10 x 14                                                  | 1014      | 16                      | 24              | 14.8                             | 330           | 250                            |
| 12.5 x 12.5 x 13                                              | 1213      | 20                      | 24              | 15.5                             | 380           | 250                            |
| 12.5 x 12.5 x 16                                              | 1216      | 24                      | 32              | 17.5                             | 380           | 200                            |

**Note**

Detailed tape dimensions see section 'PACKAGING'.

**MOUNTING**

The capacitors are designed for automatic placement on to printed-circuit boards.

Optimum dimensions of soldering pads depend amongst others on soldering method, mounting accuracy, print layout and/or adjacent components.

For recommended soldering pad dimensions, refer to Fig.3 and Table 3.


**SOLDERING**

Soldering conditions are defined by the curve, temperature versus time, where the temperature is that measured on the component during processing.

For maximum conditions refer to Fig.4.

Any temperature versus time curve which does not exceed the specified maximum curves may be applied.

 AS A GENERAL PRINCIPLE, TEMPERATURE AND DURATION SHALL BE THE **MINIMUM** NECESSARY REQUIRED TO ENSURE GOOD SOLDERING CONNECTIONS. HOWEVER, THE SPECIFIED MAXIMUM CURVES SHOULD NEVER BE EXCEEDED.

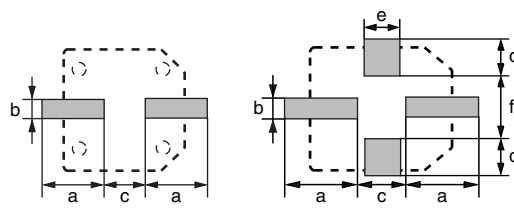

Case size  $\varnothing D \leq 10$  mm      Case size  $\varnothing D \geq 12.5$  mm  
Fig.3 Recommended soldering pad dimensions

Table 3

| RECOMMENDED SOLDERING PAD DIMENSIONS in millimeters |     |     |     |     |     |     |
|-----------------------------------------------------|-----|-----|-----|-----|-----|-----|
| CASE CODE                                           | a   | b   | c   | d   | e   | f   |
| 0810                                                | 3.5 | 2.5 | 3.0 | -   | -   | -   |
| 1010                                                | 4.3 | 2.5 | 4.0 | -   | -   | -   |
| 1014                                                | 4.3 | 2.5 | 4.0 | -   | -   | -   |
| 1213                                                | 5.5 | 2.5 | 4.0 | 4.2 | 5.0 | 5.6 |
| 1216                                                | 5.5 | 2.5 | 4.0 | 4.2 | 5.0 | 5.6 |

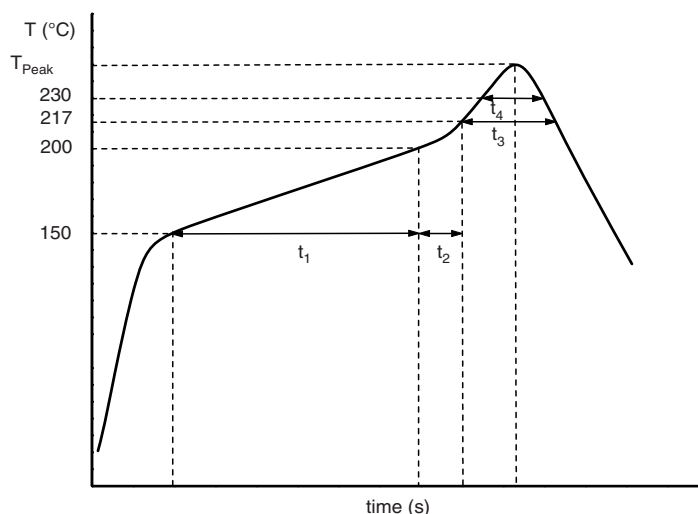


Fig.4 Maximum temperature load during reflow soldering

Table 4

| REFLOW SOLDERING CONDITIONS                       |                           |                           |
|---------------------------------------------------|---------------------------|---------------------------|
| PROFILE FEATURES                                  | CASE CODE<br>0810 to 1014 | CASE CODE<br>1213 to 1216 |
| Max. time from 25 °C to $T_{peak}$                | 240 s                     | 200 s                     |
| Max. ramp-up rate to 150 °C                       | 3 K/s                     | 3 K/s                     |
| Max. time from 150 °C to 200 °C, ( $t_1$ )        | 150 s                     | 120 s                     |
| Ramp up rate from 200 °C to $T_{peak}$            | 0.5 K/s to 3 K/s          | 0.5 K/s to 3 K/s          |
| Max. time from 200 °C - 217 °C, ( $t_2$ )         | 60 s                      | 60 s                      |
| Max. time above $T_{Liquidus}$ (217 °C) ( $t_3$ ) | 90 s                      | 60 s                      |
| Max. time above 230 °C ( $t_4$ )                  | 40 s                      | 30 s                      |
| Peak temperature $T_{peak}$                       | 250 °C                    | 240 °C                    |
| Max. time above $T_{peak}$ minus 5 °C             | 5 s                       | 10 s                      |
| Max. ramp-down rate from $T_{Liquidus}$           | 6 K/s                     | 6 K/s                     |

**Note**

Temperature measuring point on top of the case and terminals max. 2 runs with pause of min. 30 minutes in between

**ELECTRICAL DATA**

| SYMBOL        | DESCRIPTION                                       |
|---------------|---------------------------------------------------|
| $C_R$         | rated capacitance at 100 Hz, tolerance $\pm 20\%$ |
| $I_R$         | rated RMS ripple current at 100 kHz, 105 °C       |
| $I_{L2}$      | max. leakage current after 2 minutes at $U_R$     |
| $\tan \delta$ | max. dissipation factor at 100 Hz                 |
| $Z$           | max. impedance at 100 kHz                         |

**Note**

Unless otherwise specified, all electrical values in Table 5 apply at  
 $T_{amb} = 20\text{ °C}$ ,  $P = 86$  to  $106\text{ kPa}$ ,  $RH = 45$  to  $75\%$

**ORDERING EXAMPLE**

Electrolytic capacitor 150 CRZ series

220  $\mu\text{F}/50\text{ V}$ ;  $\pm 20\%$

Nominal case size: 10 x 10 x 14 mm; taped on reel

Ordering Code: MAL215097102E3

Former 12 NC: 2222 150 97102

Table 5

**ELECTRICAL DATA AND ORDERING INFORMATION**

| $U_R$<br>(V) | $C_R$<br>( $\mu\text{F}$ ) | NOMINAL<br>CASE SIZE<br>L x W x H<br>(mm) | $I_R$<br>105 °C<br>100 kHz<br>(mA) | $I_{L2}$<br>2 min<br>( $\mu\text{A}$ ) | $\tan \delta$<br>100 Hz | $Z$<br>100 kHz<br>20 °C<br>( $\Omega$ ) | $Z$<br>100 kHz<br>- 40 °C<br>( $\Omega$ ) | ORDERING CODE<br>MAL2150..... |
|--------------|----------------------------|-------------------------------------------|------------------------------------|----------------------------------------|-------------------------|-----------------------------------------|-------------------------------------------|-------------------------------|
| 6.3          | 470                        | 8 x 8 x 10                                | 435                                | 30                                     | 0.24                    | 0.250                                   | 2.000                                     | 97311E3                       |
|              | 1000                       | 10 x 10 x 10                              | 670                                | 63                                     | 0.24                    | 0.130                                   | 1.100                                     | 97301E3                       |
|              | 2200                       | 12.5 x 12.5 x 13                          | 905                                | 139                                    | 0.26                    | 0.077                                   | 0.600                                     | 97312E3                       |
| 10           | 330                        | 8 x 8 x 10                                | 435                                | 33                                     | 0.20                    | 0.250                                   | 2.000                                     | 97411E3                       |
|              | 470                        | 8 x 8 x 10                                | 435                                | 47                                     | 0.20                    | 0.250                                   | 2.000                                     | 97412E3                       |
|              | 680                        | 10 x 10 x 10                              | 670                                | 68                                     | 0.20                    | 0.130                                   | 1.100                                     | 97401E3                       |
|              | 1000                       | 10 x 10 x 14                              | 850                                | 100                                    | 0.20                    | 0.100                                   | 0.800                                     | 97402E3                       |
|              | 1500                       | 12.5 x 12.5 x 13                          | 905                                | 150                                    | 0.22                    | 0.077                                   | 0.600                                     | 97413E3                       |
|              | 2200                       | 12.5 x 12.5 x 16                          | 1007                               | 220                                    | 0.22                    | 0.060                                   | 0.480                                     | 97414E3                       |
| 16           | 220                        | 8 x 8 x 10                                | 435                                | 35                                     | 0.16                    | 0.250                                   | 2.000                                     | 97511E3                       |
|              | 330                        | 8 x 8 x 10                                | 435                                | 53                                     | 0.16                    | 0.250                                   | 2.000                                     | 97512E3                       |
|              | 470                        | 10 x 10 x 10                              | 670                                | 75                                     | 0.16                    | 0.130                                   | 1.100                                     | 97501E3                       |
|              | 680                        | 10 x 10 x 14                              | 850                                | 109                                    | 0.16                    | 0.100                                   | 0.800                                     | 97502E3                       |
|              | 1000                       | 12.5 x 12.5 x 13                          | 905                                | 160                                    | 0.18                    | 0.077                                   | 0.600                                     | 97513E3                       |
|              | 1500                       | 12.5 x 12.5 x 16                          | 1007                               | 240                                    | 0.18                    | 0.060                                   | 0.480                                     | 97514E3                       |
| 25           | 150                        | 8 x 8 x 10                                | 420                                | 38                                     | 0.14                    | 0.280                                   | 2.240                                     | 97611E3                       |
|              | 220                        | 8 x 8 x 10                                | 420                                | 55                                     | 0.14                    | 0.280                                   | 2.240                                     | 97612E3                       |
|              | 330                        | 10 x 10 x 10                              | 640                                | 83                                     | 0.14                    | 0.140                                   | 1.120                                     | 97601E3                       |
|              | 470                        | 10 x 10 x 14                              | 820                                | 118                                    | 0.14                    | 0.110                                   | 0.880                                     | 97602E3                       |
|              | 680                        | 12.5 x 12.5 x 13                          | 905                                | 170                                    | 0.16                    | 0.077                                   | 0.600                                     | 97613E3                       |
|              | 1000                       | 12.5 x 12.5 x 16                          | 1007                               | 250                                    | 0.16                    | 0.060                                   | 0.480                                     | 97614E3                       |
| 35           | 100                        | 8 x 8 x 10                                | 405                                | 35                                     | 0.12                    | 0.300                                   | 2.400                                     | 97011E3                       |
|              | 220                        | 10 x 10 x 10                              | 630                                | 77                                     | 0.12                    | 0.150                                   | 1.200                                     | 97001E3                       |
|              | 330                        | 10 x 10 x 14                              | 790                                | 116                                    | 0.12                    | 0.120                                   | 0.960                                     | 97002E3                       |
|              | 470                        | 12.5 x 12.5 x 13                          | 905                                | 165                                    | 0.14                    | 0.077                                   | 0.600                                     | 97012E3                       |
|              | 680                        | 12.5 x 12.5 x 16                          | 1007                               | 238                                    | 0.14                    | 0.060                                   | 0.480                                     | 97013E3                       |
| 50           | 68                         | 8 x 8 x 10                                | 333                                | 34                                     | 0.12                    | 0.480                                   | 3.840                                     | 97111E3                       |
|              | 100                        | 10 x 10 x 10                              | 490                                | 50                                     | 0.12                    | 0.240                                   | 1.920                                     | 97101E3                       |
|              | 220                        | 10 x 10 x 14                              | 620                                | 110                                    | 0.12                    | 0.190                                   | 1.520                                     | 97102E3                       |
|              | 330                        | 12.5 x 12.5 x 13                          | 690                                | 165                                    | 0.12                    | 0.130                                   | 1.040                                     | 97112E3                       |
| 63           | 33                         | 8 x 8 x 10                                | 270                                | 21                                     | 0.10                    | 0.650                                   | 5.200                                     | 97812E3                       |
|              | 47                         | 8 x 8 x 10                                | 270                                | 30                                     | 0.10                    | 0.650                                   | 5.200                                     | 97811E3                       |
|              | 47                         | 10 x 10 x 10                              | 390                                | 30                                     | 0.10                    | 0.380                                   | 3.000                                     | 97801E3                       |
|              | 68                         | 10 x 10 x 10                              | 390                                | 43                                     | 0.10                    | 0.380                                   | 3.000                                     | 97802E3                       |
|              | 100                        | 10 x 10 x 14                              | 507                                | 63                                     | 0.10                    | 0.290                                   | 2.320                                     | 97803E3                       |
|              | 150                        | 12.5 x 12.5 x 13                          | 507                                | 97                                     | 0.10                    | 0.250                                   | 2.000                                     | 97821E3                       |
|              | 220                        | 12.5 x 12.5 x 16                          | 637                                | 141                                    | 0.10                    | 0.200                                   | 1.600                                     | 97815E3                       |

| ADDITIONAL ELECTRICAL DATA                   |                                                              |                                          |
|----------------------------------------------|--------------------------------------------------------------|------------------------------------------|
| PARAMETER                                    | CONDITIONS                                                   | VALUE                                    |
| <b>Voltage</b>                               |                                                              |                                          |
| Surge voltage for short periods              | IEC 60384-18, subclause 4.14                                 | $U_s \leq 1.15 \times U_R$               |
| Reverse voltage for short periods            | IEC 60384-18, subclause 4.16                                 | $U_{rev} \leq 1 \text{ V}$               |
| <b>Current</b>                               |                                                              |                                          |
| Leakage current                              | After 2 minutes at $U_R$                                     | $I_{L2} \leq 0.01 \times C_R \times U_R$ |
| <b>Inductance</b>                            |                                                              |                                          |
| Equivalent series inductance (ESL)           | $\varnothing D = 8 \text{ mm}$                               | typ. 6 nH                                |
|                                              | $\varnothing D = 10 \text{ mm}$                              | typ. 8 nH                                |
|                                              | $\varnothing D \geq 12.5 \text{ mm}$                         | typ. 11 nH                               |
| <b>Resistance</b>                            |                                                              |                                          |
| Equivalent series resistance (ESR) at 100 Hz | Calculated from $\tan \delta_{max.}$ and $C_R$ (see Table 5) | $ESR = \tan \delta / 2 \pi f C_R$        |

## CAPACITANCE

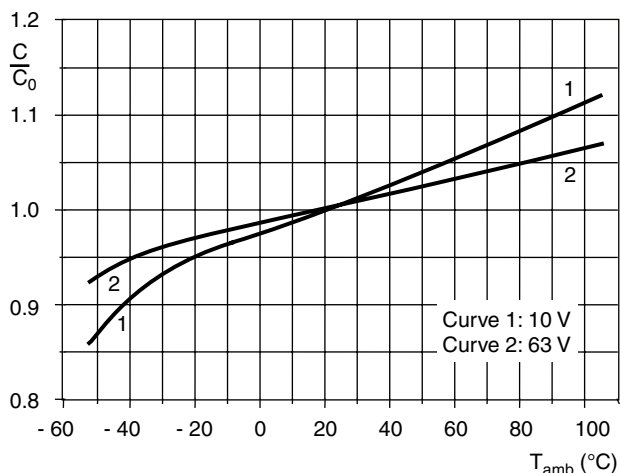


Fig.5 Typical multiplier of capacitance  $C$  as a function of temperature at 100 Hz  
 $C_0$  = typical capacitance  $C$  at 20 °C, 100 Hz

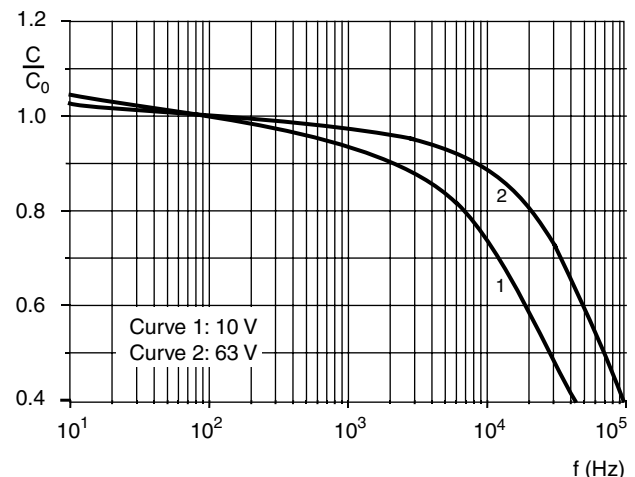


Fig.6 Typical multiplier of capacitance as a function of frequency at 20 °C  
 $C_0$  = typical capacitance  $C$  at 20 °C, 100 Hz

## EQUIVALENT SERIES RESISTANCE (ESR)

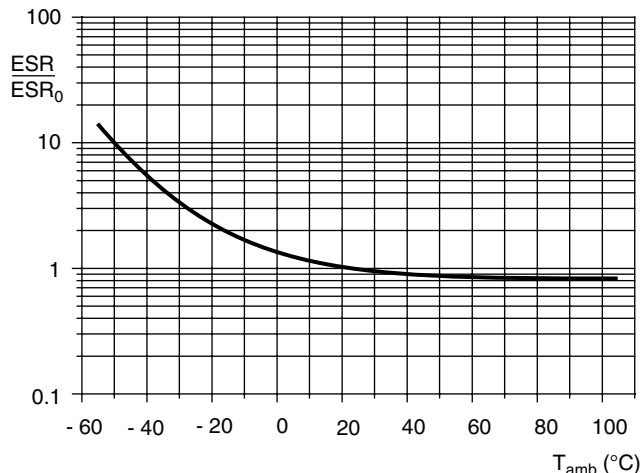


Fig.7 Typical multiplier of ESR as a function of temperature at  
100 Hz  
 $ESR_0$  = typical ESR at 20 °C, 100 Hz

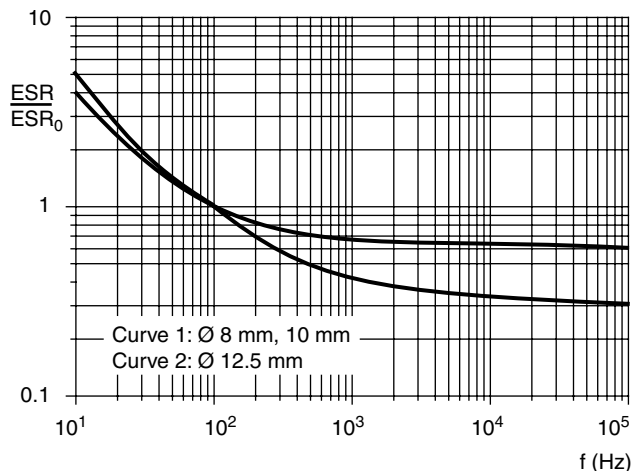


Fig.8 Typical multiplier ESR as a function of frequency at 20 °C  
 $ESR_0$  = typical ESR at 20 °C, 100 Hz

## DISSIPATION FACTOR ( $\tan \delta$ )

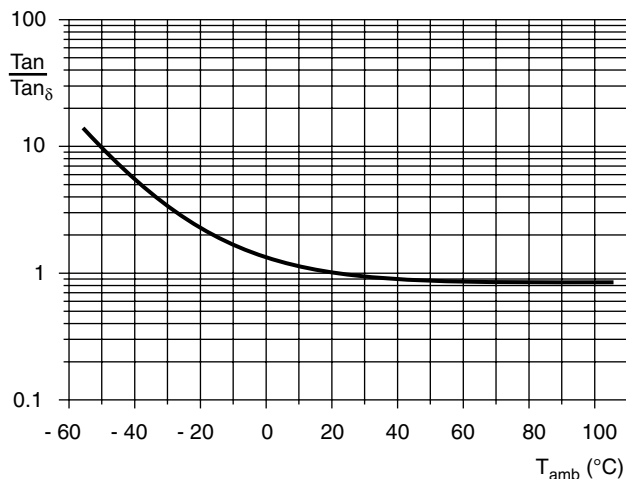


Fig.9 Typical multiplier of dissipation factor  $\tan \delta$  as a function of  
temperature at °C 20 at 100 Hz  
 $\tan \delta_0$  = typical  $\tan \delta$  at 20 °C, 100 Hz

## IMPEDANCE (Z)

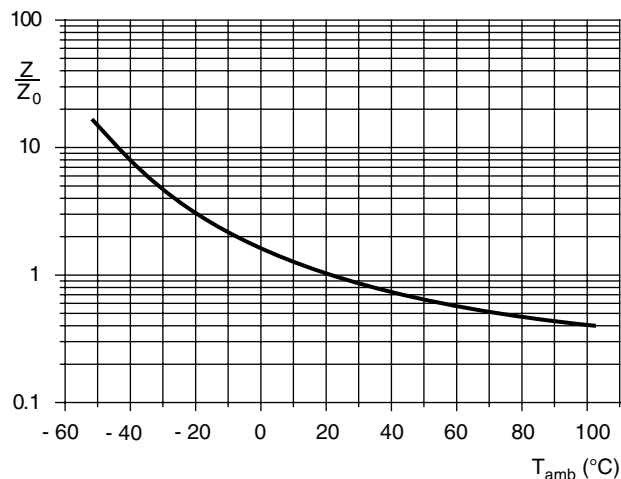


Fig.10 Typical multiplier of impedance Z as a function of  
temperature at 100 kHz  
 $Z_0$  = typical impedance Z at 20 °C, 100 kHz

## IMPEDANCE (Z)

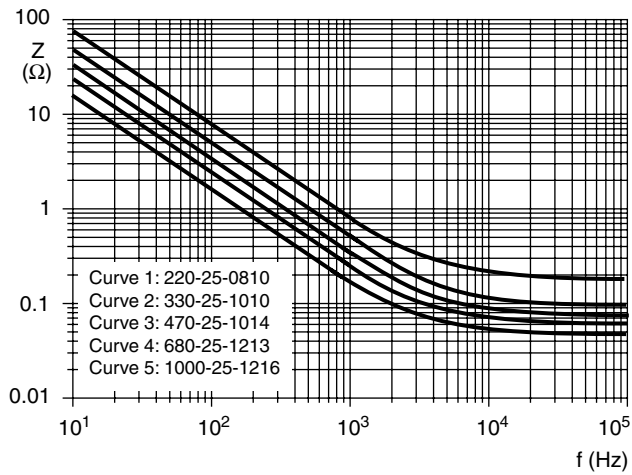


Fig.11 Typical impedance Z as a function of frequency at 20 °C

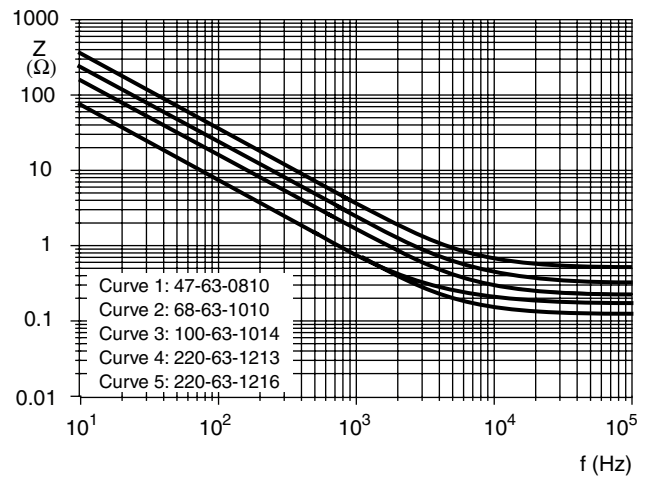


Fig.12 Typical impedance Z as a function of frequency at 20 °C

## RIPPLE CURRENT AND USEFUL LIFE

$I_A$  = actual ripple current at 100 Hz  
 $I_R$  = rated ripple current at 100 Hz, 105 °C  
<sup>(1)</sup> = useful life at 105 °C and  $I_R$  applied: 2000 h

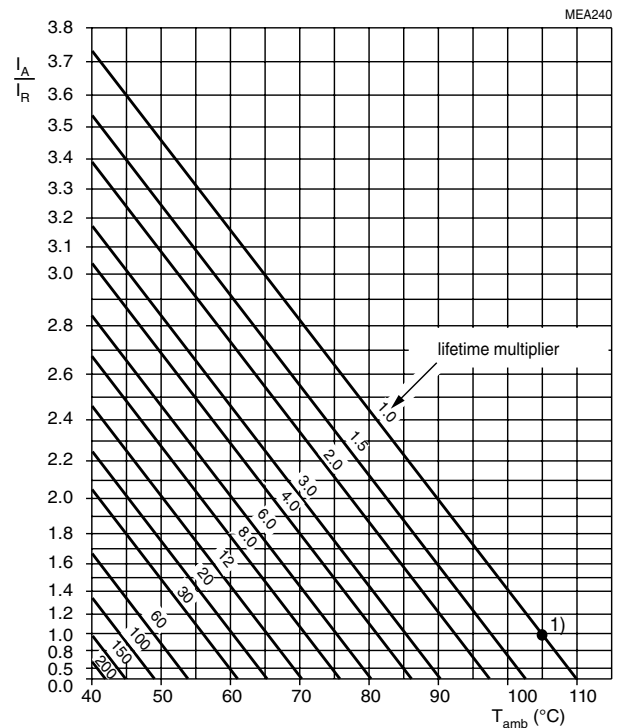


Fig.13 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 6

| <b>MULTIPLIER OF RIPPLE CURRENT (<math>I_R</math>) AS A FUNCTION OF FREQUENCY</b> |                                                    |                                |                                                   |
|-----------------------------------------------------------------------------------|----------------------------------------------------|--------------------------------|---------------------------------------------------|
| <b>FREQUENCY<br/>(Hz)</b>                                                         | <b><math>I_R</math> MULTIPLIER</b>                 |                                |                                                   |
|                                                                                   | <b><math>U_R = 6.3</math> to <math>25</math> V</b> | <b><math>U_R = 35</math> V</b> | <b><math>U_R = 50</math> to <math>63</math> V</b> |
| 100                                                                               | 0.70                                               | 0.65                           | 0.60                                              |
| 300                                                                               | 0.80                                               | 0.80                           | 0.75                                              |
| 1000                                                                              | 0.85                                               | 0.85                           | 0.85                                              |
| 3000                                                                              | 0.93                                               | 0.93                           | 0.93                                              |
| 10 000                                                                            | 0.95                                               | 0.95                           | 0.95                                              |
| 30 000                                                                            | 0.97                                               | 0.97                           | 0.97                                              |
| 100 000                                                                           | 1.00                                               | 1.00                           | 1.00                                              |

Table 7

| <b>TEST PROCEDURES AND REQUIREMENTS</b>        |                                               |                                                                                                                                                                                                                                          |                                                                                                                                                                                    |
|------------------------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TEST</b>                                    |                                               | <b>PROCEDURE<br/>(quick reference)</b>                                                                                                                                                                                                   | <b>REQUIREMENTS</b>                                                                                                                                                                |
| <b>NAME OF TEST</b>                            | <b>REFERENCE</b>                              |                                                                                                                                                                                                                                          |                                                                                                                                                                                    |
| Mounting                                       | IEC 60384-18,<br>subclause 4.3                | shall be performed prior to tests mentioned below;<br>reflow soldering;<br>for maximum temperature load<br>refer to chapter "Mounting"                                                                                                   | $\Delta C/C: \pm 5 \%$<br>$\tan \delta \leq \text{spec. limit}$<br>$I_{L2} \leq \text{spec. limit}$                                                                                |
| Endurance                                      | IEC 60384-18/<br>CECC32300,<br>subclause 4.15 | $T_{\text{amb}} = 105^\circ\text{C}$ ; $U_R$ applied;<br>case size $\leq 10 \times 10 \times 14$ : 2000 hours<br>case size $\geq 12.5 \times 12.5 \times 13$ : 3000 hours                                                                | $U_R = 6.3$ V; $\Delta C/C: \pm 25 \%$<br>$U_R \geq 10$ V; $\Delta C/C: \pm 20 \%$<br>$\tan \delta \leq 2 \times \text{spec. limit}$<br>$I_{L2} \leq \text{spec. limit}$           |
| Useful life                                    | CECC 30301,<br>subclause 1.8.1                | $T_{\text{amb}} = 105^\circ\text{C}$ ; $U_R$ and $I_R$ applied;<br>case size $\leq 10 \times 10 \times 10$ : 2500 hours<br>case size $= 10 \times 10 \times 14$ : 3000 hours<br>case size $\geq 12.5 \times 12.5 \times 13$ : 5000 hours | $\Delta C/C: \pm 30 \%$<br>$\tan \delta \leq 3 \times \text{spec. limit}$<br>$I_{L2} \leq \text{spec. limit}$<br>no short or open circuit<br>total failure percentage: $\leq 1 \%$ |
| Shelf life<br>(storage at high<br>temperature) | IEC 60384-18/<br>CECC32300,<br>subclause 4.17 | $T_{\text{amb}} = 105^\circ\text{C}$ ; no voltage applied;<br>1000 hours<br><br>after test: $U_R$ to be applied for 30 minutes,<br>24 to 48 hours before measurement                                                                     | for requirements<br>see 'Endurance test' above                                                                                                                                     |





### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9