



**A8032 Series**

**Preliminary**

**8 Bit Microcontroller**

---

**Document Title**

**8 Bit Microcontroller**

**Revision History**

<b><u>Rev. No.</u></b>	<b><u>History</u></b>	<b><u>Issue Date</u></b>	<b><u>Remark</u></b>
0.0	Initial issue	November 27, 1998	

## Preliminary

## 8 Bit Microcontroller

### Features

- 8-bit CMOS microcontroller
- Fully static design with power saving idle mode and power down mode
- Low standby current at full supply voltage
- Versions for 12/24/40MHz operating frequency
- On chip 256B RAM
- Four 8-bit bidirectional ports
- 64K bytes external data memory space

- Three 16-bit Timers/Counters (Timer 2 with up/down counter feature)
- One full duplex serial port
- Boolean processor
- Six interrupt sources, two priority levels
- Available in 40-pin P-DIP and 44-pin PLCC packages


### General Description

The AMIC A8032 is a high-performance 8-bit microcontroller. It is compatible with the industry standard 80C52 microcontroller series.


The A8032 contains a 256B RAM, four 8-bit bidirectional parallel ports, three 16-bit timer/counters, a serial port and six interrupt sources with two priority levels. The A8032 has supports 64KB external data memory.

### Pin Configurations


#### ■ P-DIP

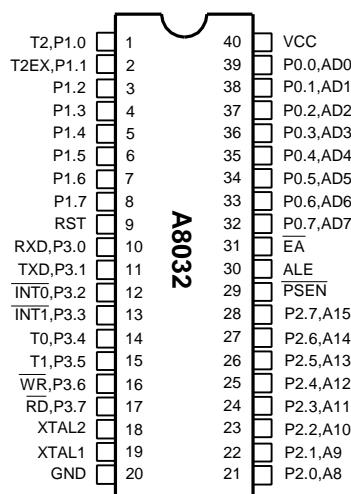

#### ■ PLCC

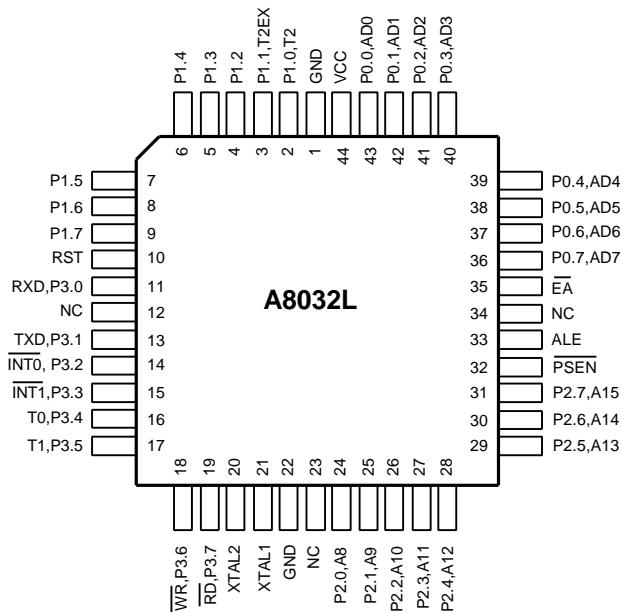

## Block Diagram

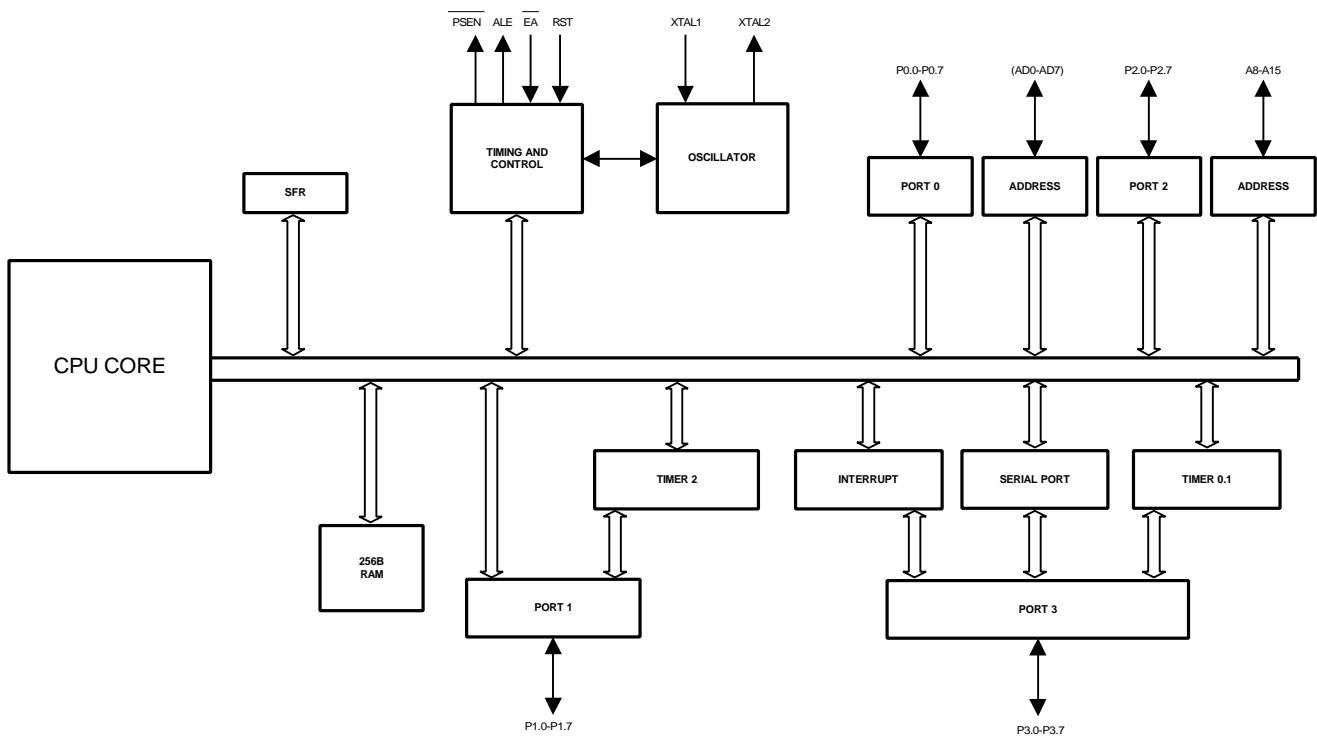

**Pin Description**

<b>Pin No.</b>	<b>Symbol</b>	<b>I/O</b>	<b>Description</b>
1 - 8	P1.0 - P1.7	I/O	Port1. Port1 is a bidirectional I/O port with internal pull-ups. Pin P1.0 and P1.1 also provide alternate functions as follows:
		I/O	P1.0 T2 Timer/Counter2 external input/clock out
		I	P1.1 T2EX Timer/Counter2 capture/reload input
9	RST	I	Reset input, active high. It must be kept high for at least two machine cycles to be recognized by the processor
10 - 17	P3.0 - P3.7	I/O	Port3. Port3 is a bidirectional I/O port with internal pull-ups. Port3 pins also serve alternate functions as follows:
		I	P3.0 $\overline{RXD}$ Serial receive port
		O	P3.1 $\overline{TXD}$ Serial transmit port
		I	P3.2 $\overline{INT0}$ External interrupt 0
		I	P3.3 $\overline{INT1}$ External interrupt 1
		I	P3.4 T0 Timer/Counter 0 input
		I	P3.5 T1 Timer/Counter 1 input
		O	P3.6 $\overline{WR}$ External data memory write strobe
		O	P3.7 $\overline{RD}$ External data memory read strobe
18	XTAL2	O	Crystal2. This is the output of crystal oscillator. It is the inversion of XTAL1
19	XTAL1	I	Crystal1. This is the input of crystal oscillator. It can be driven by an external clock
20	GND	I	Ground
21 - 28	P2.0 - P2.7	I/O	Port2. Port2 is a bidirectional I/O port with internal pull-ups. Port2 is also the multiplexed upper-order address bus during accesses to external data memory
29	$\overline{PSEN}$	O	Program Store Enable, active low. The read strobe to external program memory. $\overline{PSEN}$ is activated in each machine cycle when fetching external program memory
30	ALE	O	Address latch enable, active high. ALE is used to enable the address latch that separates the data on Port 0
31	$\overline{EA}$	I	External Access enable, active low. It is held low to enable the device to fetch code from external program memory
32 - 39	P0.7 - P0.0	I/O	Port0. Port0 is an open drain, bidirectional I/O port. Port0 is also the multiplexed low-order address bus during accesses to external data memory
40	VCC	I	Power supply

## Functional Description

The A8032 is a high speed 8-bit microcontroller. The architecture consists of a core controller, four general purposes I/O ports, 256 bytes RAM internal register and a serial port.

This microcontroller supports 111 opcodes and executes instructions in a 6-clock bus cycle. It can reference both a 64K program address space and a 64K data storage space.

## Timer/Counter 0, 1 and 2

Timer 0,1 and 2 each consist of two 8-bit data registers. These are called TL0 and TH0 for Timer 0. TL1 and TH1 for Timer 1, and TL2 and TH2 for Timer 2. The TMOD and TCON registers support control function for Timer 0 and Timer 1. The T2CON register provides control function for Timer 2. When operating reload/capture mode, RCAP2H and RCAP2L will be used.

## Interrupt

The A8032 provides 6 interrupt modes. These consist of 2 external interrupts, 3 internal interrupts and a serial port interrupt.

The enable/disable interrupt is controlled by IE register in SFR.


The priority of interrupts is controlled by IP register in SFR.

## Serial Port Transfer

The A8032 provides a full duplex serial transfer function. This function is controlled by SCON register in SFR. And the data is stored in SBUF register during transmitting and receiving.


## Oscillator Characteristics

The oscillator connections are shown as Figure 1. And Figure 2. When quartz crystal is used, C1 and C2 are 30pF shown in Figure 1. When external clock is used, the internal clock will be gotten through a divide-by-two flip-flop. When starting up, the input loading for XTAL1 pin is 100pF. This is due to interaction between the amplifier and its feedback capacitance interaction. After the external signal meets the V<sub>IL</sub> and V<sub>IH</sub> specification the capacitance will not exceed 20pF.



C1,C2 = 30pF ± 10pF for Crystals

**Figure 1. Oscillator Connections**

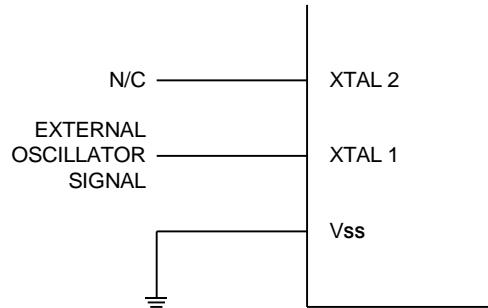

**Figure 2. External Clock Drive configuration**

## RESET

The external reset signal must be held high for at least two machine cycles during the oscillator running.

After reset, the ports are held high, SP register to 07H, all of the other SFR registers except SBUF to 00H, and SBUF is not reset.

**Recommended DC Operating Conditions (T<sub>A</sub> = -25°C to + 85°C)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
VCC	Supply Voltage	4.5	5.0	5.5	V
GND	Ground	0	0	0	V
V <sub>IH</sub> *	Input High Voltage	2.4	-	VCC+0.2	V
V <sub>IL</sub>	Input Low Voltage	0	-	0.8	V

\* XTAL1 is a CMOS input. RESET is a Schmit trigger input.

The min. of V<sub>IH</sub> is 3.5 Volts for these two pins.

**Absolute Maximum Ratings\***

VCC to GND ..... -0.3V to +7.0V  
 IN, IN/OUT Volt to GND ..... -0.5V to VCC + 0.5V  
 Operating Temperature, Topr ..... -25°C to + 85°C  
 Storage Temperature, Tstg ..... -55°C to + 125°C  
 Power Dissipation<sup>1</sup>, Pr ..... 1W  
 Soldering Temperature & Time ..... 260°C, 10sec

1\* : Operating frequency is 40MHz

**\*Comments**

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to this device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied or intended. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

**DC Electrical Characteristics (T<sub>A</sub> = -25°C to + 85°C, VCC = 5V ± 10%)**

Symbol	Parameter	Min.	Max.	Unit	Conditions
I <sub>LU</sub>   <sup>1</sup>	Input Leakage Current	-	10	µA	V <sub>IN</sub> = GND to VCC
I <sub>LO</sub>	Output Leakage Current	-	10	µA	V <sub>IO</sub> = GND to VCC
I <sub>CC</sub>	Operating Current	-	50	mA	foper = 40MHz External oscillator is on XTAL1 pin No load
V <sub>OL1</sub>	Output Low Voltage (PORT1, PORT2 and PORT3)	-	0.45	V	I <sub>OL</sub> = 2mA
V <sub>OL2</sub>	Output Low Voltage (ALE, PSEN and PORT0)	-	0.45	V	I <sub>OL</sub> = 4mA
V <sub>OH1</sub>	Output High Voltage (PORT1, PORT2 and PORT3)	2.4	-	V	I <sub>OH</sub> = -100µA
V <sub>OH2</sub>	Output High Voltage (ALE, PSEN and PORT0)	2.4	-	V	I <sub>OH</sub> = -400µA
C <sub>1</sub>	Input Pin Capacitance	-	10	pF	1MHz, 25°C

1. For RESET pin, the |I<sub>LU</sub>| max. is 300 µA, since it has an internal pull-low of approx. 30KΩ resistor.


**AC Characteristics (T<sub>A</sub> = -25°C to + 85°C, VCC = 5V ± 10%)**

Symbol	Parameter	Min.	Max.	Unit
<b>Program Memory Cycle</b>				
t <sub>AP</sub>	ALE Pulse Width	2t <sub>cck</sub> - 20 <sup>1</sup>	-	ns
t <sub>ALS</sub>	Address Valid to ALE Low	1t <sub>cck</sub>	-	ns
t <sub>ALH</sub>	Address Hold from ALE Low	1t <sub>cck</sub>	-	ns
t <sub>op</sub>	PSEN Pulse Width	3t <sub>cck</sub> - 20 <sup>1</sup>	-	ns
t <sub>AO</sub>	ALE Low to PSEN Low	1t <sub>cck</sub>	-	ns
t <sub>oi</sub> <sup>2</sup>	PSEN Low to Valid Instruction in	-	2t <sub>cck</sub>	ns
t <sub>ido</sub>	Input Instruction Hold after PSEN High	-	1t <sub>cck</sub>	ns
t <sub>iFO</sub>	Input Instruction Float after PSEN High	-	1t <sub>cck</sub>	ns
<b>External Clock</b>				
f <sub>OPER</sub>	Clock Frequency	0	40	MHz
t <sub>cck</sub> <sup>3</sup>	Clock Period	25	-	ns
t <sub>cckH</sub> <sup>4</sup>	Clock High Time	10	-	ns
t <sub>cckL</sub> <sup>4</sup>	Clock Low Time	10	-	ns
<b>Data Memory Cycle</b>				
t <sub>PR</sub>	RD Pulse Width	6t <sub>cck</sub> - 20 <sup>1</sup>	-	ns
t <sub>PD</sub>	RD Low to Valid Data in	-	4t <sub>cck</sub>	ns
t <sub>DHR</sub>	Data Hold from RD High	0	2t <sub>cck</sub>	ns
t <sub>DFR</sub>	Data Float from RD High	0	2t <sub>cck</sub>	ns
t <sub>AR</sub>	ALE Low to RD Low	3t <sub>cck</sub>	3t <sub>cck</sub> + 20 <sup>1</sup>	ns
t <sub>WP</sub>	WR Pulse Width	6t <sub>cck</sub> - 20 <sup>1</sup>	-	ns
t <sub>DS</sub>	Valid Data to WR Low	1t <sub>cck</sub>	-	ns
t <sub>DHW</sub>	Data Hold from WR High	1t <sub>cck</sub>	-	ns
t <sub>AW</sub>	ALE Low to WR Low	3t <sub>cck</sub>	3t <sub>cck</sub> + 20 <sup>1</sup>	ns
<b>Serial Port Cycle</b>				
t <sub>sck</sub>	Serial Port Clock	12t <sub>cck</sub>	-	ns
t <sub>ki</sub>	Clock Rising Edge to Valid Input Data	-	11t <sub>cck</sub>	ns
t <sub>ikh</sub>	Input Data to Serial Clock Rising Clock Hold Time	0	-	ns
t <sub>oks</sub>	Output Data to Serial Clock Rising Edge Setup Time	11t <sub>cck</sub>	-	ns
t <sub>okh</sub>	Output Data to Serial Clock Rising Edge Hold Time	1t <sub>cck</sub>	-	ns


1. This 20 ns is due to buffer driving delay and wire loading.
2. Instruction cycle time is 12 t<sub>cck</sub>.
3. t<sub>cck</sub> = 1/ f<sub>oper</sub>
4. There are no duty cycle requirements on the XTAL1 input.

### Timing Waveforms

#### Program Memory Cycle

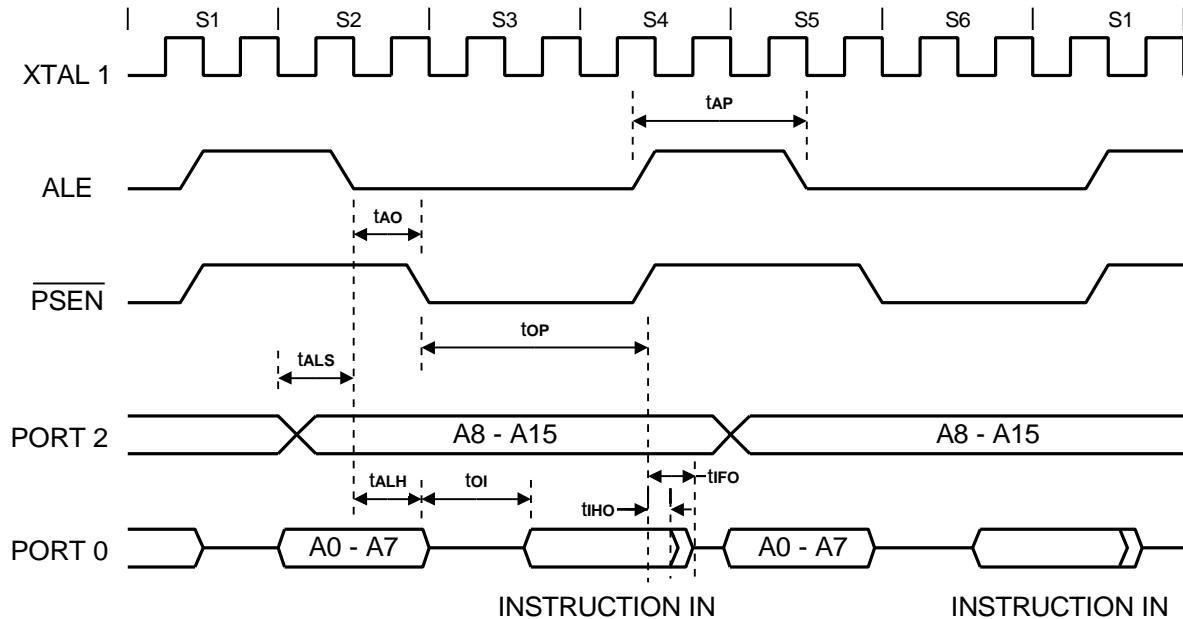


#### Clock Input Waveform

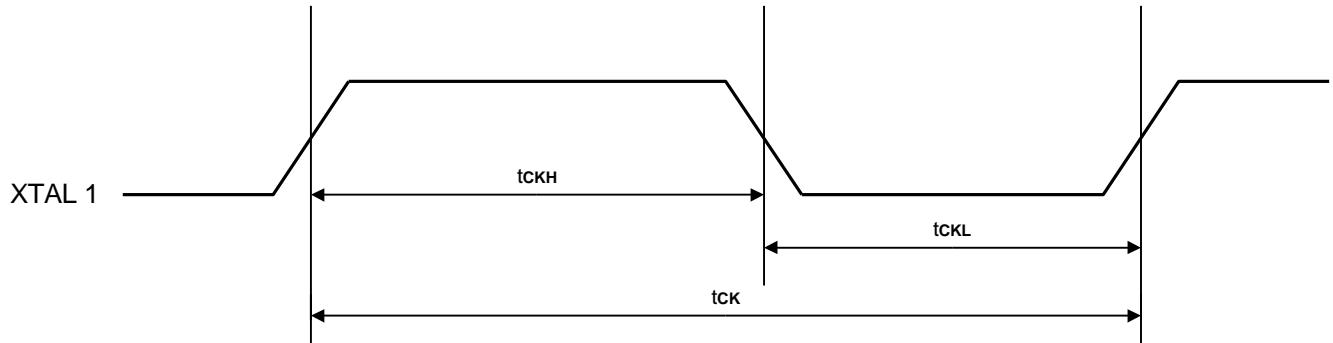


### Timing Waveforms (continued)


#### Data Memory Read Cycle

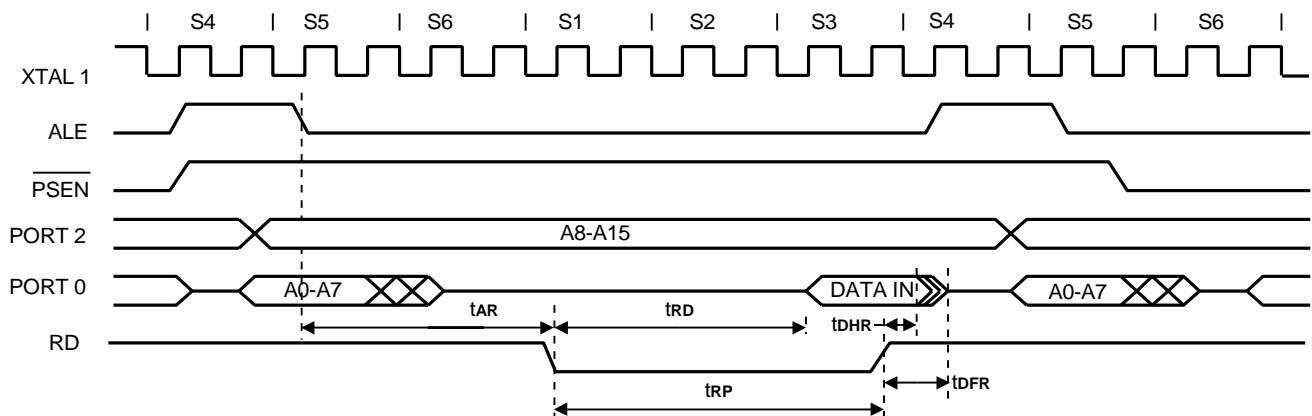

#### Data Memory Write Cycle

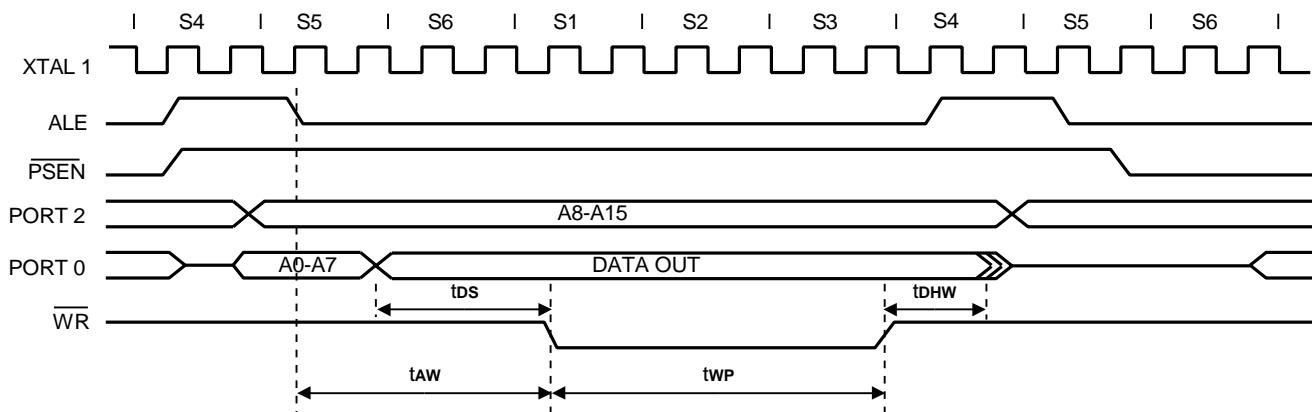

#### Serial Port Timing – Shift Register Mode

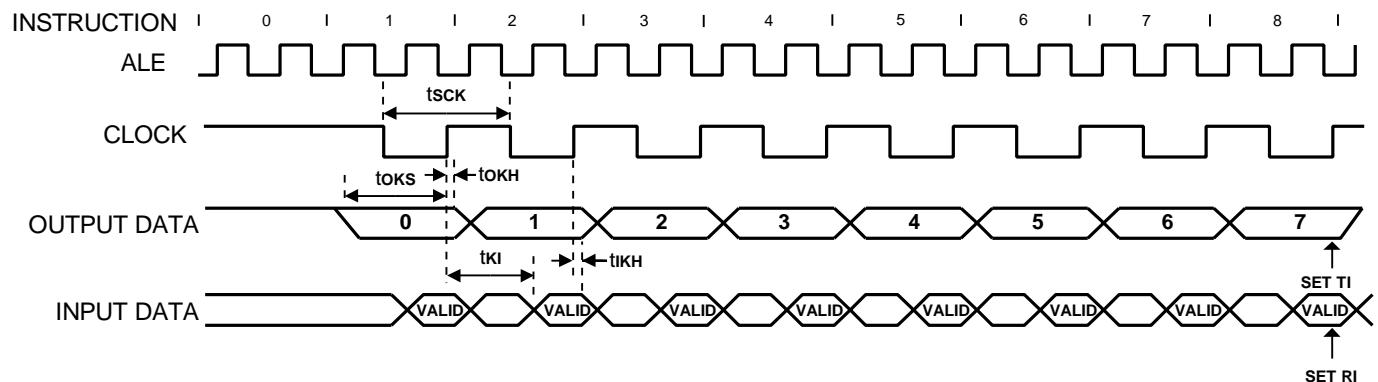


**Ordering Information**

Part No.	RAM	FREQ (MHz)	Package
A8032-12	256 Byte	12	40L P-DIP
A8032L-12	256 Byte	12	44L PLCC
A8032-24	256 Byte	24	40L P-DIP
A8032L-24	256 Byte	24	44L PLCC
A8032-40	256 Byte	40	40L P-DIP
A8032L-40	256 Byte	40	44L PLCC

## Package Information

### P-DIP 40L Outline Dimensions

unit: inches/mm

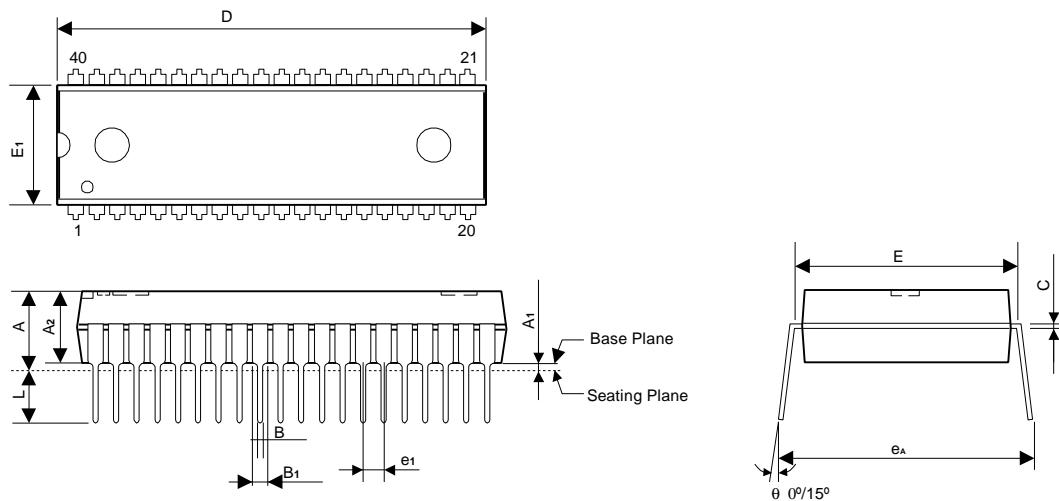

Symbol	Dimensions in inches			Dimensions in mm		
	Min	Nom	Max	Min	Nom	Max
A	-	-	0.210	-	-	5.344
A <sub>1</sub>	0.015	-	-	0.381	-	-
A <sub>2</sub>	0.150	0.155	0.160	3.810	3.937	4.064
B	0.018 TYP			0.457 TYP		
B <sub>1</sub>	0.050 TYP			1.270 TYP		
C	-	0.010	-	-	0.254	-
D	2.049	2.054	2.059	52.045	52.172	52.299
E	0.590	0.600	0.610	14.986	15.240	15.494
E <sub>1</sub>	0.542	0.547	0.552	13.767	13.894	14.021
e <sub>1</sub>	0.100 TYP			2.540 TYP		
L	0.120	0.130	0.140	3.048	3.302	3.556
e <sub>A</sub>	0.622	0.642	0.662	15.799	16.307	16.815


#### Notes:

1. The maximum value of dimension D includes end flash.
2. Dimension E<sub>1</sub> does not include resin fins.

## Package Information

### PLCC 44L Outline Dimension

unit: inches/mm

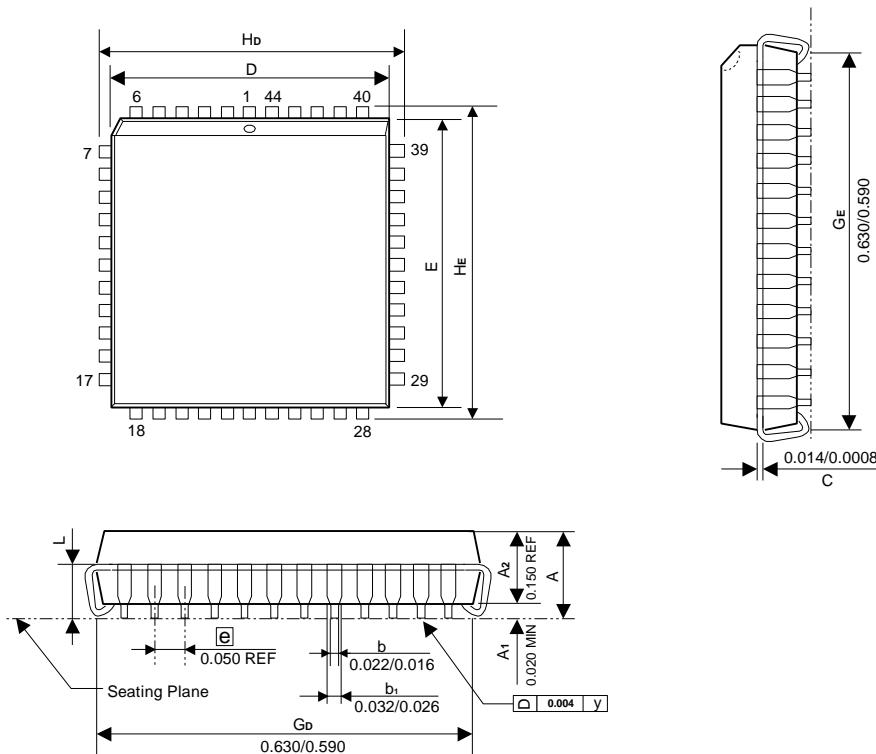

Symbol	Dimensions in inches			Dimensions in mm		
	Min	Nom	Max	Min	Nom	Max
A	-	-	0.185	-	-	4.70
D	0.648	0.653	0.658	16.46	16.59	16.71
E	0.648	0.653	0.658	16.46	16.59	16.71
Hd	0.680	0.690	0.700	17.27	17.53	17.78
He	0.680	0.690	0.700	17.27	17.53	17.78
L	0.090	0.100	0.110	2.29	2.54	2.79
θ	0°	-	10°	0°	-	10°

#### Notes:

1. Dimensions D and E do not include resin fins.
2. Dimensions G<sub>b</sub> & G<sub>e</sub> are for PC Board surface mount pad pitch design reference only.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9