



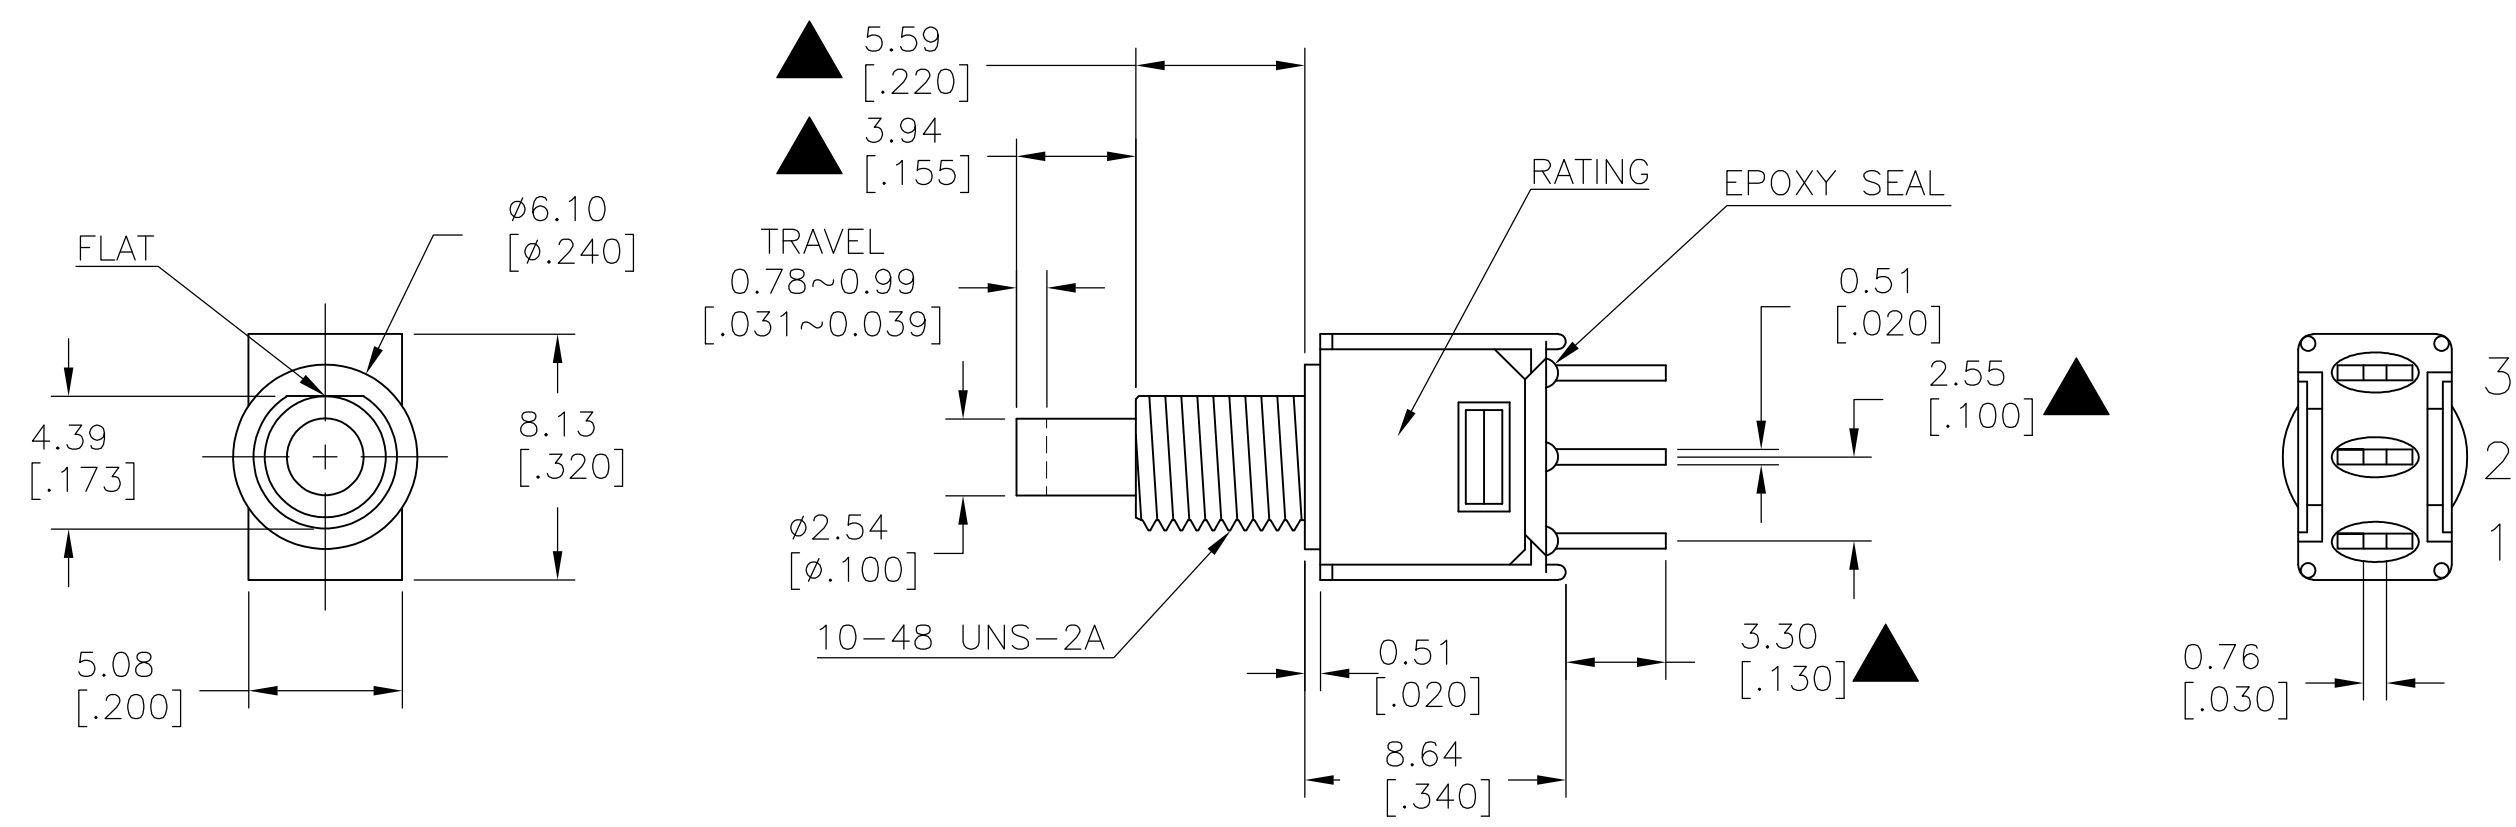


MODEL NO.	POS.1	POS.2
PMS9	ON	MOM
TERM. COMM.	2-1	2-3
SCHEMATIC		

SWITCH FUNCTION

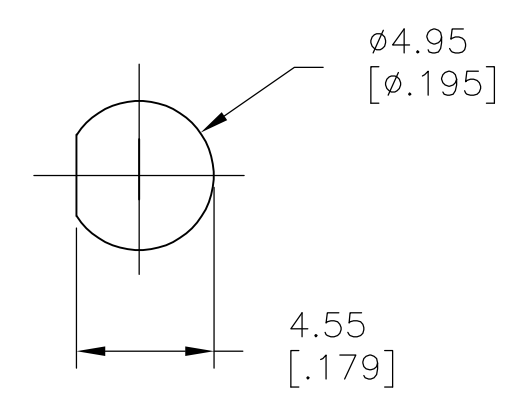

PANEL MOUNTING

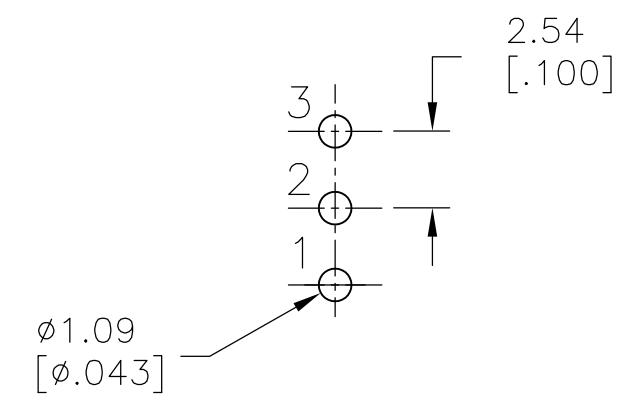

P.C. MOUNTING

LAYOUT FOR PN 2267074-4

SPECIFICATIONS

- MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20mΩMAX. INITIAL @ 2-4VDC 100mA FOR BOTH SILVER AND GOLD PLATED CONTACTS.
- CONTACT RATING: GOLD PLATED: 0.4VA MAX @20 V MAX (AC OR DC)
- INSULATION RESISTANCE: 1,000MΩMIN.
- DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

SILVER	ON-MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS8P1B05M2QE	2267074-4
SILVER	OFF-MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS9P1B05M2QE	2267074-3
GOLD	OFF-MOM	PC THROUGH HOLE	RIGHT ANGLE	1	1	PMS9P1B05M6RE	2267074-2
GOLD	OFF-MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS9P1B05M2RE	2267074-1
CONTACT MATERIAL	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.38[.015]
2 PLC ± 0.25[.010]
3 PLC ± -
4 PLC ± -
ANGLES ± 5°
FINISH


DWN 09JUL2014
CHK NAGALAKSHMI K
HILL, RYAN
APVD 09JUL2014
HILL, RYAN
PRODUCT SPEC
APPLICATION SPEC
WEIGHT


TE Connectivity

SUBMINIATURE PUSH BUTTON SWITCH



SIZE A2
CAGE CODE 00779
DRAWING NO C-2267074
RESTRICTED TO

SCALE 3:1
SHEET 1 OF 4
REV A1

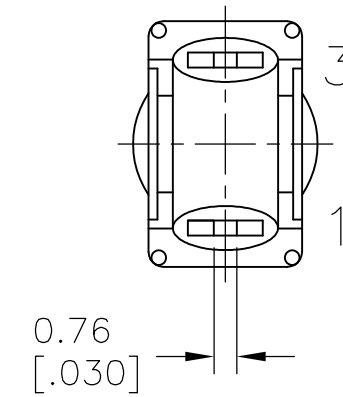

MODEL NO.	POS.1	POS.2
		
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

PANEL MOUNTING


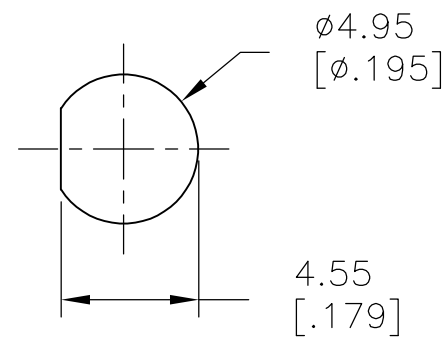
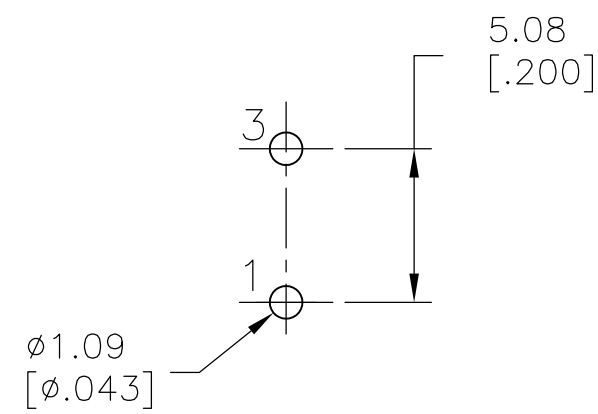
P.C. MOUNTING

LAYOUT FOR PN 2267074-3


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION

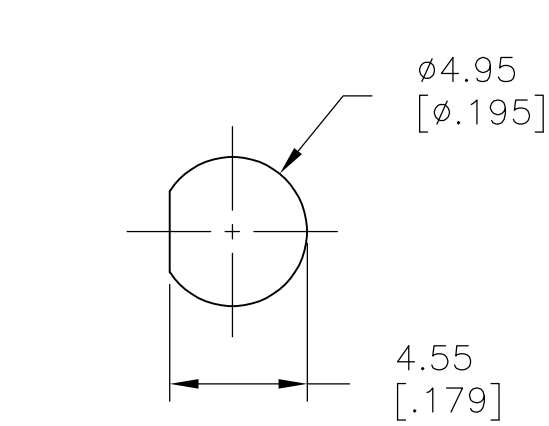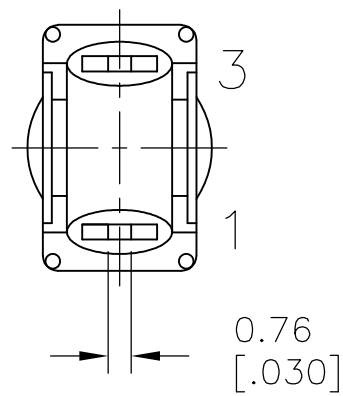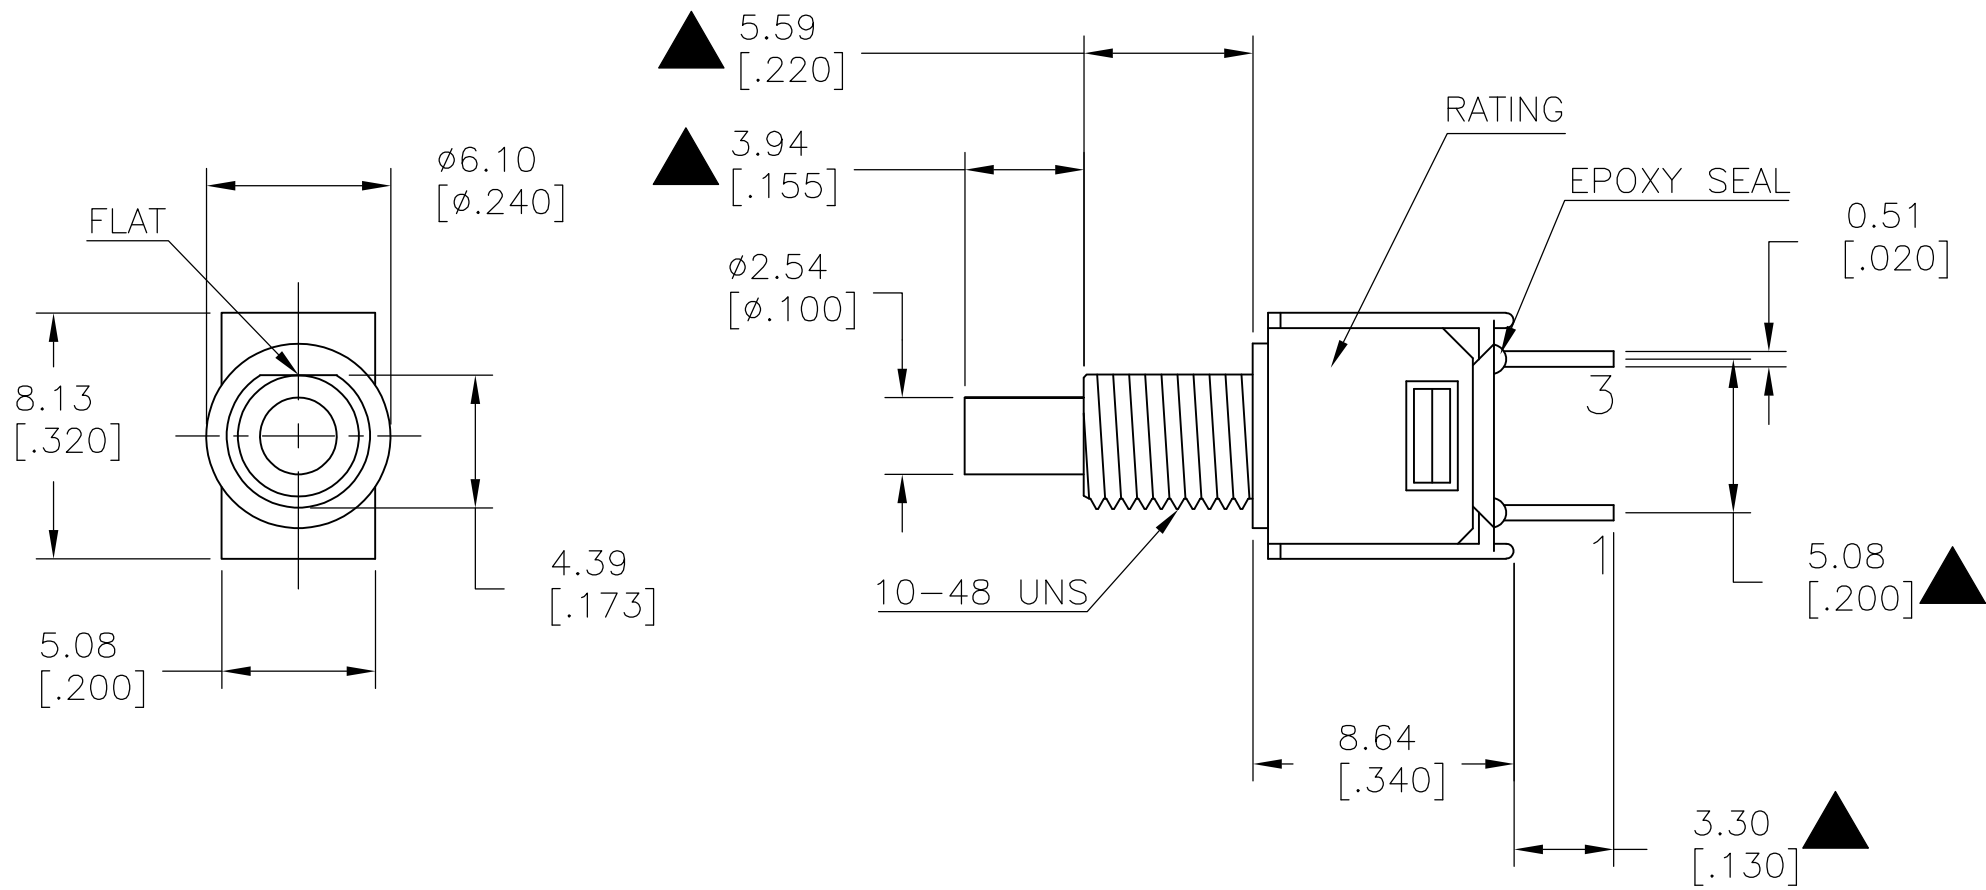

PANEL MOUNTING

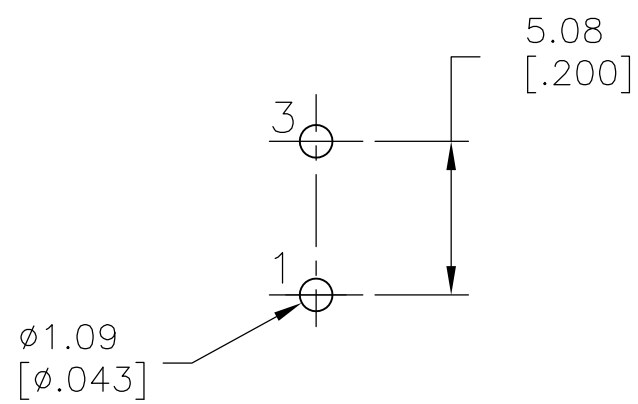

P.C. MOUNTING



LAYOUT FOR PN 2267074-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 09JUL2014	 TE Connectivity									
		CHK HILL, RYAN 09JUL2014										
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD HILL, RYAN 09JUL2014	NAME									
	0 PLC ± -	PRODUCT SPEC	SUBMINIATURE PUSH BUTTON SWITCH									
	1 PLC ± 0.38[.015]	—										
	2 PLC ± 0.25[.010]	—										
	3 PLC ± -	APPLICATION SPEC										
	4 PLC ± -	—	SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL	FINISH	WEIGHT	A2		00779		C=2267074		—			
		CUSTOMER DRAWING				SCALE		3:1		SHEET 3 of 4		REV A1

LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		


SWITCH FUNCTION

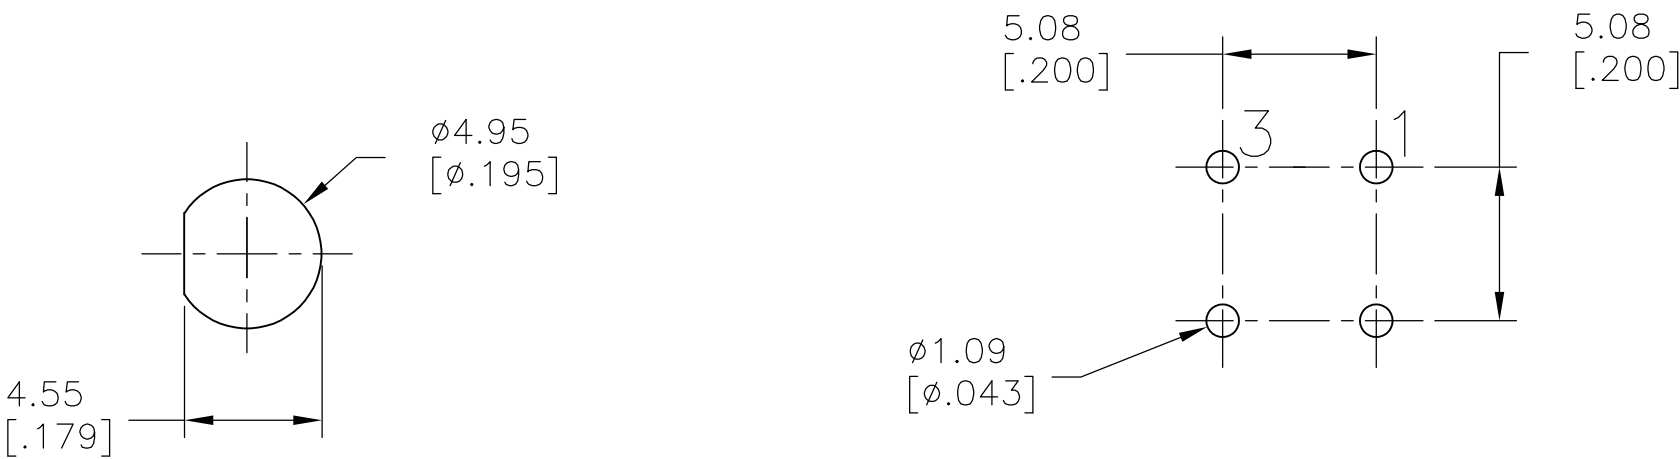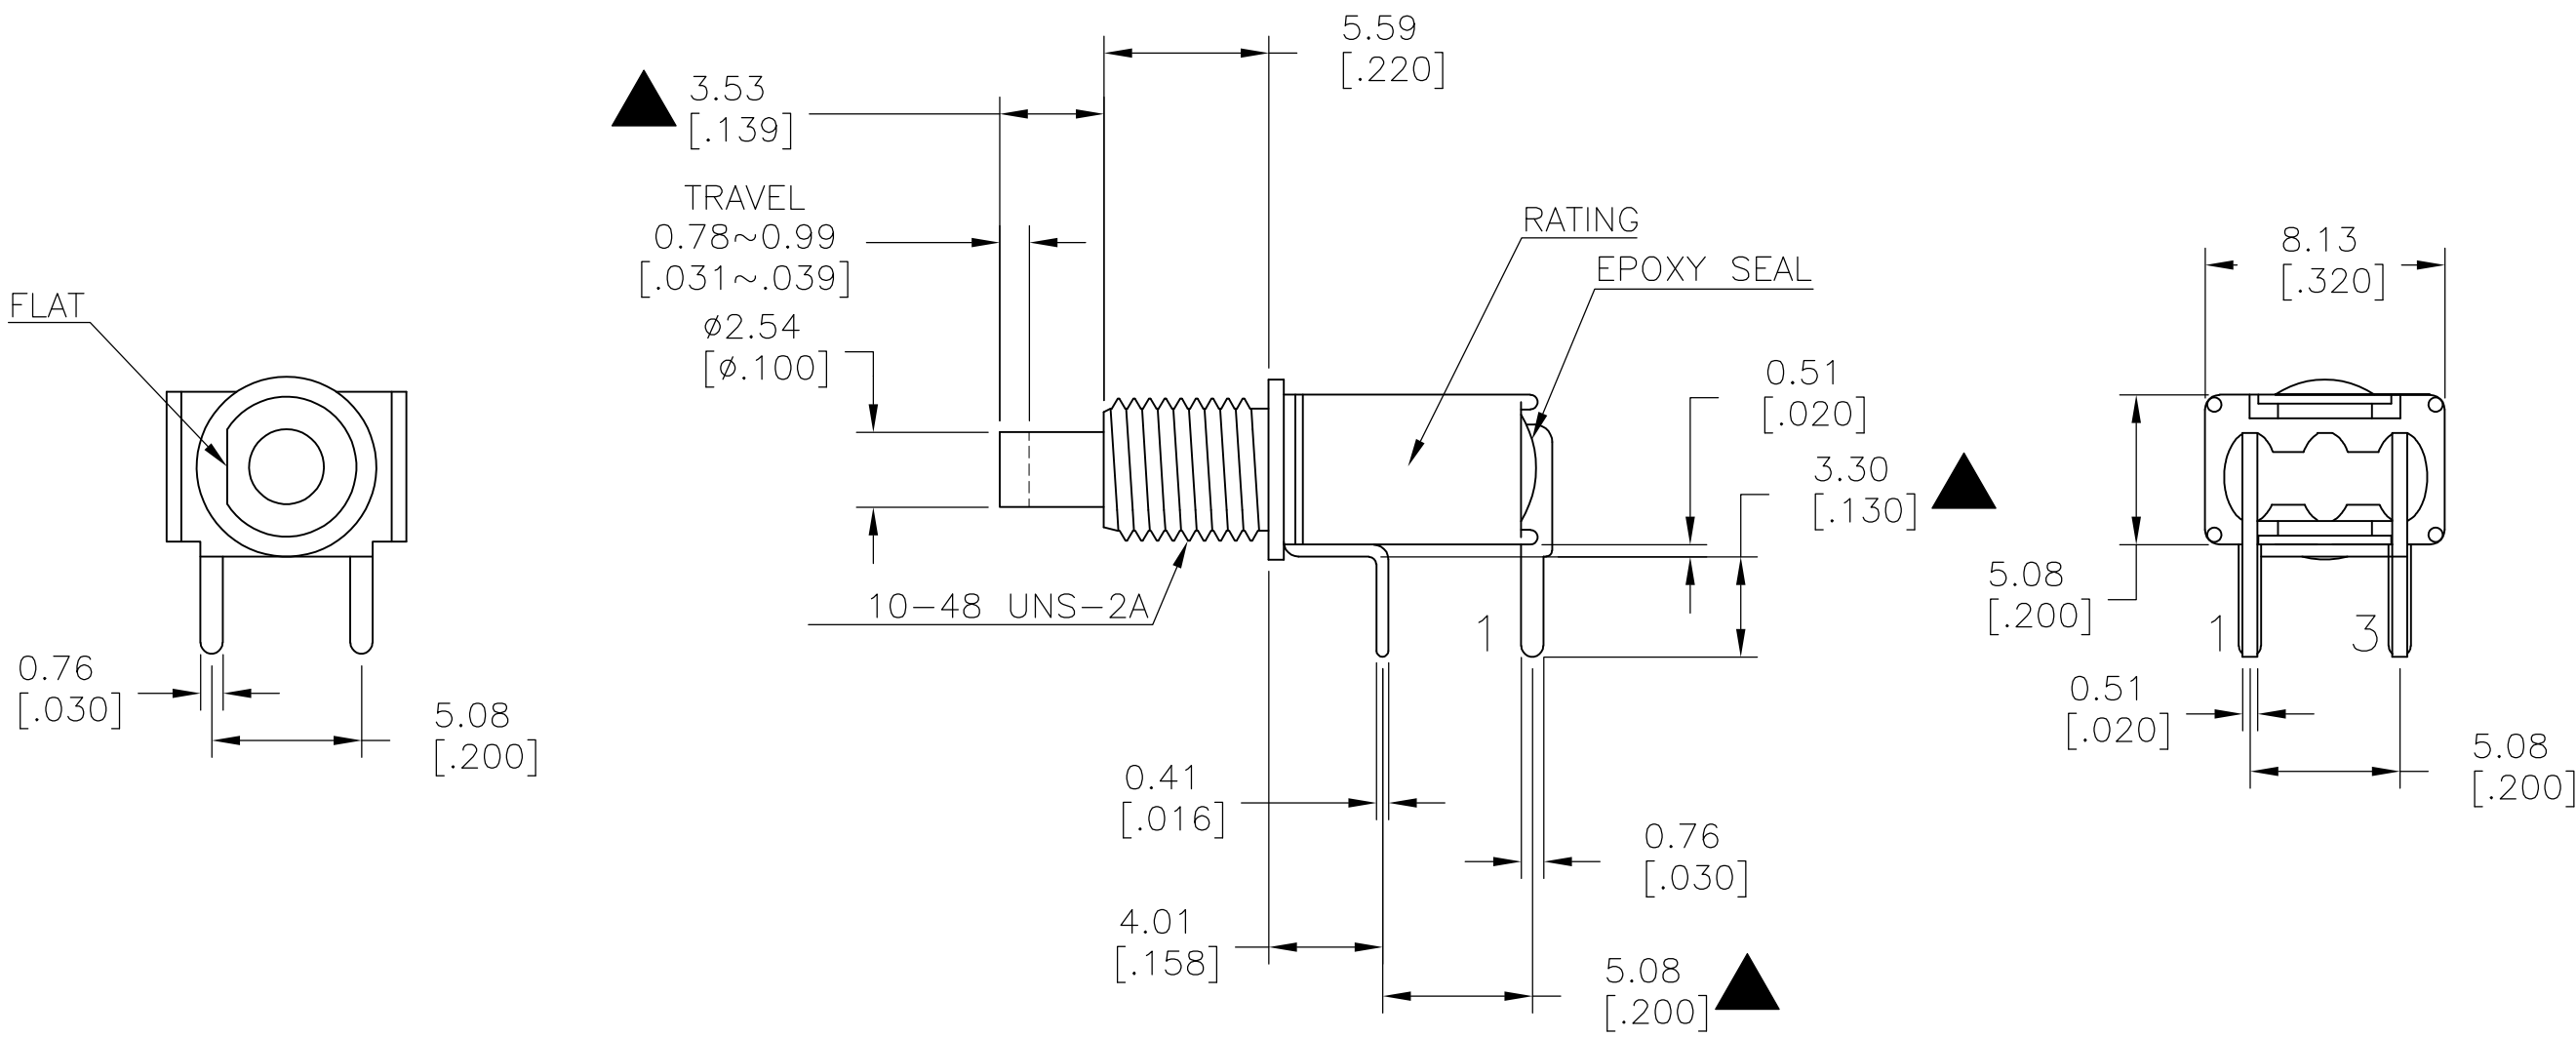

PANEL MOUNTING

P.C. MOUNTING

LAYOUT FOR PN 2267074-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 09JUL2014		 TE Connectivity						
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 09JUL2014								
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HILL, RYAN 09JUL2014		NAME SUBMINIATURE PUSH BUTTON SWITCH					
	0 PLC ± -		PRODUCT SPEC —							
	1 PLC ± 0.38[.015]		APPLICATION SPEC —							
	2 PLC ± 0.25[.010]		SIZE A2							
MATERIAL —	3 PLC ± -		WEIGHT —		CAGE CODE 00779		DRAWING NO C=2267074		RESTRICTED TO —	
	4 PLC ± -		CUSTOMER DRAWING		SCALE 3:1		SHEET 4 of 4		REV A1	
	ANGLES ± 5°									
	FINISH —									

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9