

## UM 25-D 9SUB/S/FRONT/Q


Order No.: 2959573

The illustration shows the version UM 25-D 9SUB/B/FRONT/Q




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959573>

VARIOFACE SLIM LINE, with screw connection and D-subminiature pin strip, for assembly at a right angle on NS 35/7.5, 9 positions



### Commercial data

GTIN (EAN)	 4 017918 086220
sales group	I011
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 287 (IF-2009)

### Product notes

WEEE/RoHS-compliant since:  
11/30/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	125 V AC/DC
Max. current carrying capacity per branch	2.5 A
	1.5 A (with even load on all branches)
Number of positions	9

Width	25 mm
Height	117 mm
Depth	45 mm
Ambient temperature (operation)	-10 °C ... 50 °C
Ambient temperature (storage/transport)	-10 °C ... 70 °C
Test voltage	800 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

#### Certificates / Approvals



Certification

GOST

Accessories		
Item	Designation	Description
<b>Cable/conductor</b>		
2302421	CABLE D-SUB-B-B-S/.../.../...	Shielded round cable, assembled with two D-SUB female connectors, variable cable length
2302340	CABLE D-SUB-S/.../.../...	Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length
2299987	CABLE-D 9SUB/B/S/ 50/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m
2299990	CABLE-D 9SUB/B/S/100/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m
2300009	CABLE-D 9SUB/B/S/150/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m
2302010	CABLE-D 9SUB/B/S/200/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m
2302023	CABLE-D 9SUB/B/S/300/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m
2302036	CABLE-D 9SUB/B/S/400/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m
2302049	CABLE-D 9SUB/B/S/600/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m
2926014	CABLE-D- 9SUB/F/OE/0,25/ S/0,5M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 0.5 m.
2926027	CABLE-D- 9SUB/F/OE/0,25/ S/1,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1 m.
2926030	CABLE-D- 9SUB/F/OE/0,25/ S/1,5M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1.5 m.
2926043	CABLE-D- 9SUB/F/OE/0,25/ S/2,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 2 m.
2926056	CABLE-D- 9SUB/F/OE/0,25/ S/3,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 3 m.
2926069	CABLE-D- 9SUB/F/OE/0,25/ S/4,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 4 m.


2926072	CABLE-D- 9SUB/F/OE/0,25/S/6,0M	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 6 m.
---------	--------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**General**

2900903	CABLE-D- 9SUB-F-OE-0,25-S/...	Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: variable.
---------	-------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Diagrams/Drawings**

Circuit diagram

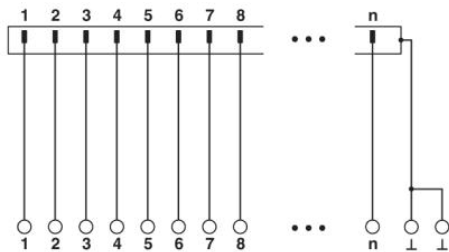

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9