
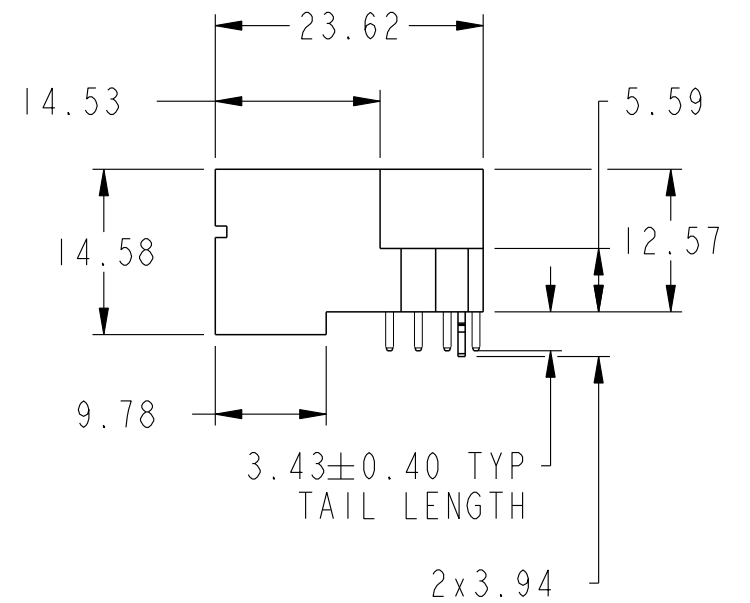
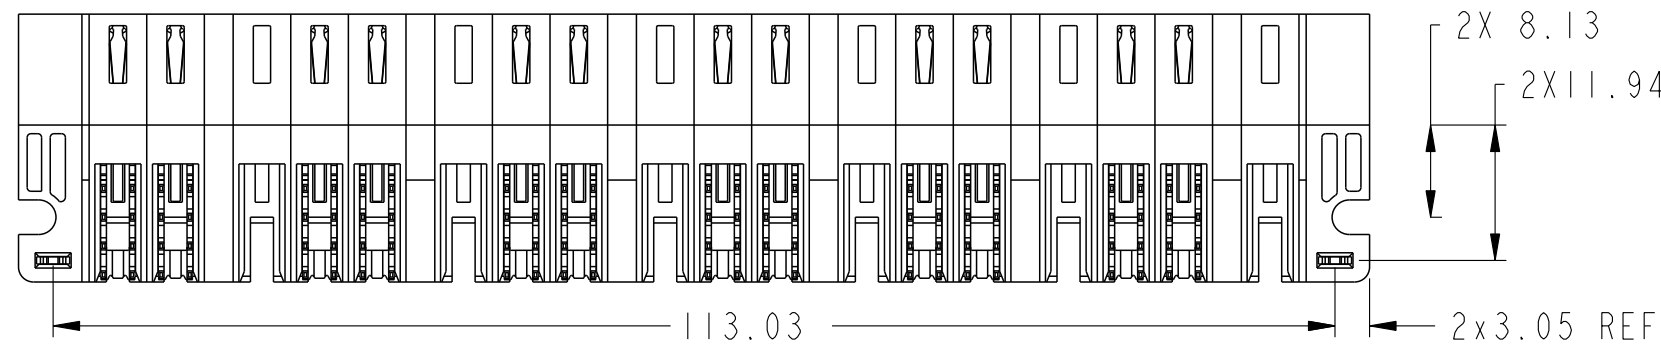
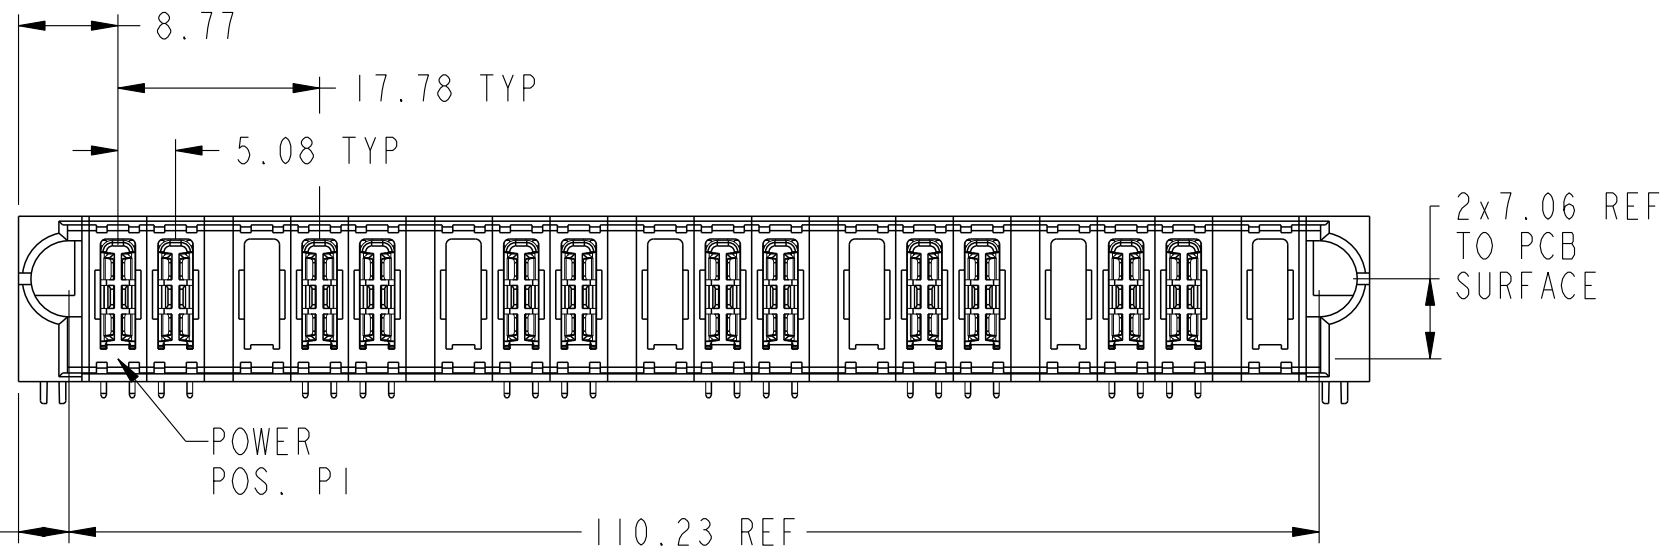



PRODUCT NUMBER

SEE SHEET 2

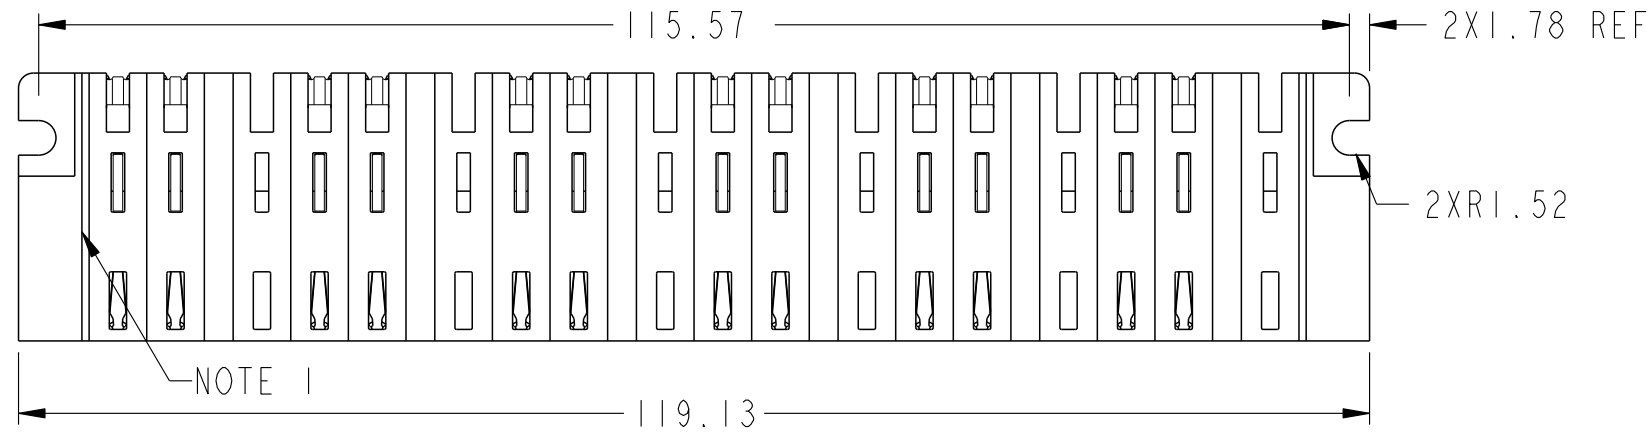

spec ref				*	dr		Rainbow Zhan	2016/11/22	projection		MM		size	A3	scale	3:2																			
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu	2016/12/15					ecn no	-																					
					chr		Fancy Zhang	2016/12/15																											
					appr		Pei-Ming Zheng	2016/12/15									product family			PwrBlade+	rel level		Released												
ISO 406																																			
ISO 1101																																			
surface	linear	0.X		±0.5		Amphenol FCI	title				18HP				dwg no				10106262-J000001				rev		A										
		0.XX		±0.25																															
		0.XXX		±0.10																															
	angular		0°		±2°																														
ISO 1302																																			

PRODUCT NO.	ROWS	HIGH POWER																			
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	E2
10106262-J000001LF	D C B A		H1	H1	X	H1	H1	X	H1	H1	X	H1	H1	X	H1	H1	X	H1	H1	X	

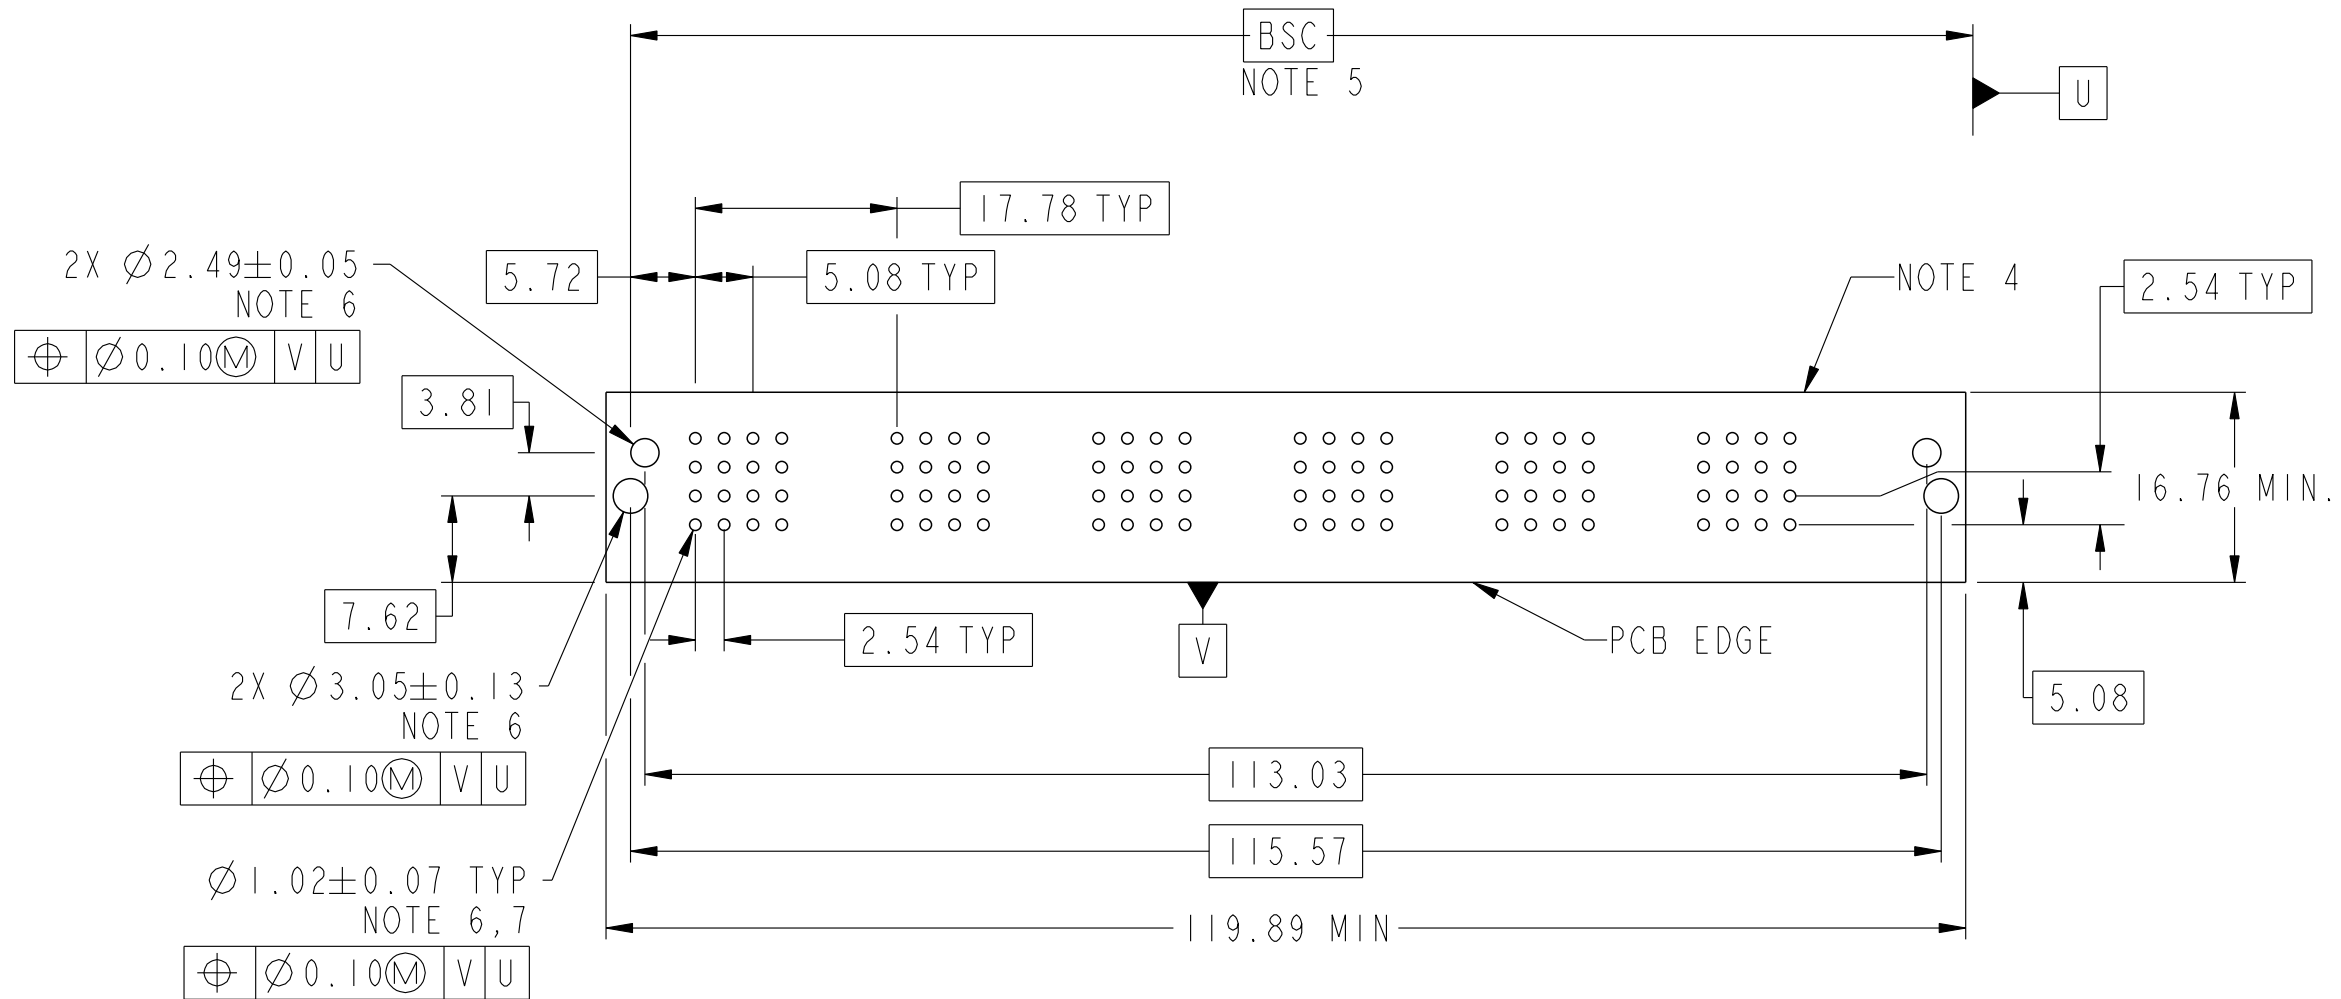

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
X	OMITTED

spec ref *		dr Rainbow Zhan		2016/11/22		projection	MM	size A3	scale 3:2	
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng Sunny2 Liu		2016/12/15			ecn no -		
			chr Fancy Zhang		2016/12/15			rel level Released		
			appr Pei-Ming Zheng		2016/12/15					
product family PwrBlade+										
surface ✓ ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 18HP RA STB PLUG			dwg no 10106262-J000001	rev A	
		0.XX	±0.25							
		0.XXX	±0.10							
	angular	0°	±2°		cat. no.		Product - Customer Drw			sheet 2 of 3

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref *				dr	Rainbow Zhan	2016/11/22	projection 	MM 	size	A3	scale	3:2
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Sunny2 Liu	2016/12/15			ecn no -			
ISO 406				chr	Fancy Zhang	2016/12/15			rel level Released			
ISO 1101				appr	Pei-Ming Zheng	2016/12/15	product family PwrBlade+					
surface 	linear	0.X	±0.5	Amphenol FCi	title	18HP RA STB PLUG			dwg no	10106262-J000001		rev A
		0.XX	±0.25									
		0.XXX	±0.10									
	ISO 1302	angular	0°									

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9